
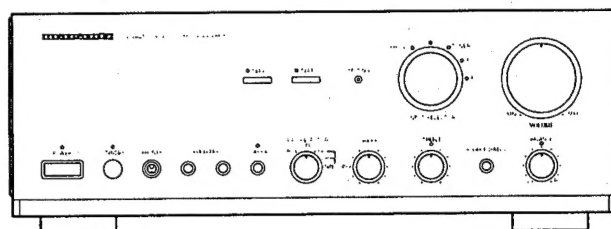


# Service Manual

74 PM68 / PM78 /02B/ 02G  
PM-68 / PM-78 /FB/ FN  
PM-68 /UBL  
Integrated stereo amplifier

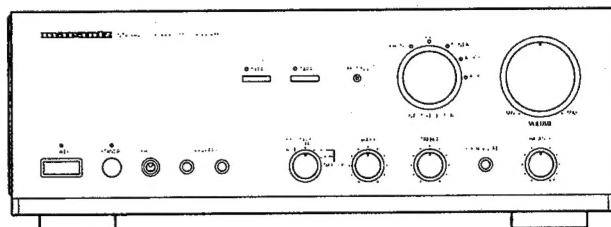

## TABLE OF CONTENTS

SECTION	PAGE
1.SPECIFICATIONS .....	1
2.TEST EQUIPMENT REQUIRED SERVICING .....	2
3.IC INFORMATIONS .....	3
4.BLOCK DIAGRAM .....	5
5.WIRING DIAGRAM .....	7
6.SCHEMATIC DIAGRAM AND PARTS LOCATION (PARTS SIDE) .....	9
7.EXPLODED VIEW AND PARTS LIST .....	45
8.IDLING CURRENT AND DC OFFSET VOLTAGE ALIGNMENT .....	48
9.ELECTRICAL PARTS LIST .....	49

Please use this service manual with referring to the user guide (D.F.U) without fail.  
修理の際は、必ず取扱説明書を準備し操作方法を確認の上作業を行ってください。

# marantz®

## MARANTZ DESIGN AND SERVICE

Using superior design and selected high grade components, **MARANTZ** company has created the ultimate in stereo sound. Only original **MARANTZ** parts can insure that your **MARANTZ** product will continue to perform to the specifications for which it is famous.

Parts for your **MARANTZ** equipment are generally available to our National Marantz Subsidiary or Agent.

### ORDERING PARTS :

Parts can be ordered either by mail or by Fax.. In both cases, the correct part number has to be specified.

The following information must be supplied to eliminate delays in processing your order :

1. Complete address
2. Complete part numbers and quantities required.
3. Description of parts
4. Model number for which part is required
5. Way of shipment
6. Signature : any order form or Fax. must be signed, otherwise such part order will be considered as null and void.

#### USA

**MARANTZ AMERICA, INC.**  
440 MEDINAH ROAD  
ROSELLE, ILLINOIS 60172- 2330  
USA  
PHONE : 630 - 307 - 3100  
FAX : 630 - 307 - 2687

#### CANADA

**LENBROOK INDUSTRIES LIMITED**  
633 GRANITE COURT,  
PICKERING, ONTARIO L1W 3K1  
CANADA  
PHONE : 416-831-6333  
FAX : 416-831-6936

#### EUROPE

**MARANTZ EUROPE B.V.**  
P.O.BOX 80002  
BUILDING SFF2  
5600 JB EINDHOVEN  
THE NETHERLANDS  
PHONE : +31 - 40 - 2732241  
FAX : +31 - 40 - 2735578

#### PROFESSIONAL USA

**SUPERSCOPE TECHNOLOGIES, INC.**  
MARANTZ PROFESSIONAL PRODUCTS  
1000 CORPORATE BLVD., SUITE D  
AURORA, ILLINOIS 60504 USA  
PHONE : 630 - 820 - 4800  
FAX : 630 - 820 - 8103

#### PROFESSIONAL CANADA

**TC ELECTRONICS CANADA LTD.**  
540 FIRING AVE.  
BAIE D'URFÉ, QUEBEC H9X 3T2  
CANADA  
PHONE : 514 - 457 - 4044  
FAX : 514 - 457 - 5524

#### TRADING

**MARANTZ EUROPE B.V.**  
P.O.BOX 80002  
BUILDING SFF2  
5600 JB EINDHOVEN  
THE NETHERLANDS  
PHONE : +31 - 40 - 2732241  
FAX : +31 - 40 - 2735578

#### BRAZIL

**MARANTZ BRAZIL**  
Caixa Postal 21462  
CEP 04698-970  
Sao Paulo, SP, BRAZIL  
PHONE : 0800 - 123123 (Discagem Direta Gratuita)  
FAX : +55 11 534. 8988

#### THAILAND

**MRZ STANDARD CO., LTD.**  
746 - 750 WANGBURAPA BANGKOK  
10200 THAILAND  
PHONE : +66 2222 9181  
FAX : +66 2225 8871

#### HONG KONG

**FORWARD INTERNATIONAL CORP.LTD.**  
15 TH FLOOR, REGENT CENTRE,  
88 QUEEN'S ROAD, CENTRAL, H. K.  
PHONE : +852 521 - 0883  
FAX : +852 521 - 7835

#### TAIWAN

**PAI-YUNG CO., LTD.**  
6 TH FL NO, 148 SUNG KIANG ROAD,  
TAIPEI, 10429, TAIWAN R.O.C.  
PHONE : +886 (2) 5221304 - 8  
FAX : +886 (2) 5630415

#### MALAYSIA

**WO KEE HONG ELECTRONICS SDN. BHD.**  
NO. 1 02 JALAN SS 21/35, DAMANSARA  
UTAMA, 47400 PETALING JAYA  
SELANGOR DARUL EHSAN,  
MALAYSIA  
PHONE : +60 3 - 7184666  
FAX : +60 3 - 7173828

#### JAPAN Technical

**MARANTZ JAPAN INC.**  
35- 1, 7- chome, Sagamiono  
Sagamihara - shi, Kanagawa  
Japan  
PHONE : +81 427 44 7950  
FAX : +81 427 48 0889

#### 日本マランツ株式会社

本 社 〒228  
神奈川県相模原市相模大野 7 - 35 - 1  
営業本部 〒150  
東京都渋谷区恵比寿南 1 - 11 - 9

#### SINGAPORE

**FORWARD MARKETING (SINGAPORE) PTE. LTD.**  
29, LENG KEE ROAD  
SINGAPORE 159099,  
PHONE : +65 475 - 4555  
FAX : +65 475 - 8623

### SHOCK, FIRE HAZARD SERVICE TEST :

**CAUTION :** After servicing this appliance and prior to returning to customer, measure the resistance between either primary AC cord connector pins ( with unit NOT connected to AC mains and its Power switch ON ), and the face or Front Panel of product and controls and chassis bottom.

Any resistance measurement less than 1 Megohms should cause unit to be repaired or corrected before AC power is applied, and verified before it is return to the user/customer.

Ref. UL Standard NO. 1492.

In case of difficulties, do not hesitate to contact the Technical Department at above mentioned address.

## 1. SPECIFICATIONS

### Power output (class AB operation)

RMS 8ohms (20 Hz -20 kHz) .....	95W
DIN 8 ohms ..	105W
THD at 8 ohms RMS rated output .....	0.03%
Damping factor .....	150

### Power out put (PM-78 classA operation)

RMS 8 ohms (20 Hz-20 kHz) .....	25 W
DIN 8 ohms ..	28 W
THD at 8 ohms RMS. rated output .....	0.03%
Damping factor .....	150

### IHF dynamic power (class AB operation)

8 ohms /4 ohms /2 ohms .....	120 / 185 / 220 W
------------------------------	-------------------

### IHF dynamic power (PM-78 class A operation)

8 ohms/4 ohms/2 ohms .....	35 / 45 / 50 W
----------------------------	----------------

### Magnetic cartridge input (MM)

input sensitivity impedance .....	2.5 mV/ 47 kOhms
Accuracy of frequency response to IEC RIAA .....	0.5 dB
Signal to noise ratio .....	85 dB

### Tuner/CD/Aux/Tape inputs

input sensitivity impedance .....	150 mV / 40 kOhms
Signal to noise ratio .....	88dB
Frequency response	
(-1 dB limits, Source Direct) .....	10 Hz - 65 kHz
Tone characteristic (100 Hz and 10 kHz) .....	± 8 dB
Channel separation	
(1 kHz/10 kHz, Source direct) .....	> 80 / > 70 dB

### General

#### Power Requirements

/02 versions .....	230 V AC,50 Hz
U versions .....	120 V AC,60 Hz

#### Dimensions

Width .....	439 mm
Height .....	159 mm
Depth .....	375 mm

#### Weight

Unit alone .....	12.3 kg
------------------	---------

Specifications subject to change without prior notice

定格出力 (20 Hz - 20 kHz 両チャンネル同時駆動)

クラス AB .....	100 W x 2 (8 Ω 負荷)
クラス A (PM-78 のみ) .....	25 W x 2 (8 Ω 負荷)
ダイナミックパワー	
クラス AB .....	150 W x 2 (6 Ω 負荷)
	190 W x 2 (4 Ω 負荷)
	220 W x 2 (2 Ω 負荷)

全高周波歪率(20 Hz - 20 kHz, 10 W 出力時 8 Ω 負荷)

クラス AB .....	0.015
クラス A (PM-78 のみ) .....	0.010 %

混変調歪率 (SMPTE) .....

出力帯域幅 (8 Ω 負荷, 0.08% 歪率) .....

周波数特性

(CD, ソースダイレクト) .....

ダンピングファクター (8 Ω 負荷, 100 Hz - 10 kHz) .....

入力感度/入力インピーダンス

PHONO (MM) .....

HIGH LEVEL .....

PHONO 最大許容入力 (1 kHz)

(MM) .....

RIAA 偏差 (20 Hz) .....

(40 Hz - 20 kHz) .....

S/N比 (IHF, Aネットワーク, 入力ショート)

PHONO (MM) .....

HIGH LEVEL .....

トーンコントロール

BASS (100 Hz) .....

TREBLE (10 kHz) .....

電源電圧 .....

消費電力 (電気用品取締法) .....

最大外形寸法

幅 .....

高さ .....

奥行き .....

質量 .....

付属品

リモートコントロール送信機 (RC-68PM) .....

本機の規格および外観は改良のため予告なく変更することがあります。

## 2. TEST EQUIPMENT REQUIRED SERVICING


Item	Use
Distortion Analyzer	Distortion measurements
Audio Oscillator	Sinewave and squarewave signal source
AC VTVM	Voltage measurements (AC)
Oscilloscope	Waveform analysis and trouble shooting and ASO alignment
DC VTVM	Voltage measurements (DC)
AC Wattmeter	Monitors primary power to amplifier
Line Voltmeter	Monitors of primary voltage to amplifier
Variable Autotransformer	Adjust level of primary voltage to amplifier
Circuit Tester	Trouble shooting
Shorting Plug	Shorts amplifier input to eliminate noise pickup

項 目	使 用 方 法
歪 率 計	歪の測定
低 周 波 発 振 器	正弦波および矩型波の信号源
A C V T V M	交流電圧の測定
オ シ ロ ス コ ー プ	波計分析、トラブルシューティングおよび ASO の調整
D C V T V M	直流電圧の測定
交流ワットメーター	アンプの一次側消費電力のモニター
電 源 電 圧 計	アンプの一次側電圧のモニター
ス ラ イ ダ ッ ク	アンプの一次側電圧の調整
テ ス タ ー	トラブルシューティング
ショート用プラグ	雑音を拾わないようにアンプ入力を短絡する



### 3. IC INFORMATIONS


#### MICROPROCESSOR (SDIP42-P-600) BLOCK DIAGRAM

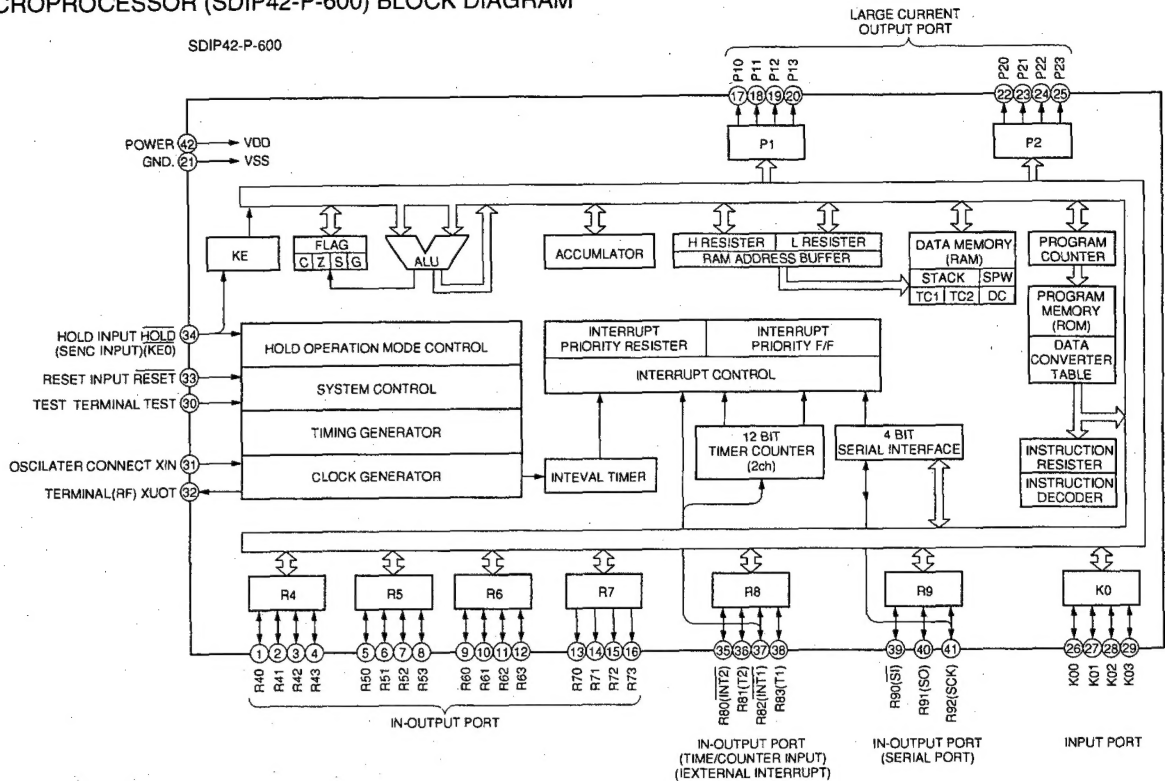


PIN no.	PORT NAME	ACT	FUNCTION
1	R40	MMUT	H MANUAL MUTE SIGNAL MUTE
2	R41	FMUT	L SIGNAL(SOURCE/MONITOR SWITCH)
3	R42	VOUP	L MOTOR DRIVE VOLUME UP
4	R43	VODW	L MOTOR DRIVE VOLUME DOWN
5	R50	T3K	L MONITOR INPUT SWITCH (TAPE3)
6	R51	T2K	L MONITOR INPUT SWITCH (TAPE2)
7	R52	T1K	L MONITOR INPUT SWITCH (TAPE1)
8	R53	AX2K	L SOURCE INPUT SWITCH (AUX2)
9	R60	AX1K	L SOURCE INPUT SWITCH (AUX1)
10	R61	TUNK	L SOURCE INPUT SWITCH (TUNER)
11	R62	CDK	L SOURCE INPUT SWITCH (CD)
12	R63	PHOK	L SOURCE INPUT SWITCH (PHONO)
13	R70	LSTB	L LED INDICATOR STAND BY DISPLAY
14	R71	LMUT	L LED INDICATOR MUTE DISPLAY
15	R72	LPRO	L LED INDICATOR PROCESSOR DISPLAY
16	R73	LTP3	L LED INDICATOR TAPE3 DISPLAY
17	P10	LTP2	L LED INDICATOR TAPE2 DISPLAY
18	P11	LTP1	L LED INDICATOR TAPE1 DISPLAY
19	P12	LSOU	L LED INDICATOR SOURCE DISPLAY
20	P13	LAX2	L LED INDICATOR AUX2 DISPLAY
21	VSS		GND.
22	P20	LAX1	L LED INDICATOR AUX1 DISPLAY
23	P21	LTUN	L LED INDICATOR TUNER DISPLAY
24	P22	LECD	L LED INDICATOR CD DISPLAY
25	P23	LPHO	L LED INDICATOR PHONO DISPLAY
26	K00	1RS	L SOURCE INPUT SWITCH(ROTARY ENCODER) bit1
27	K01	2RS	L SOURCE INPUT SWITCH(ROTARY ENCODER) bit2
28	K02	PRK	L PROCESSOR IN-OUT SWITCH
29	K03	MUK	L MANUAL MUTE
30	TEST		NOT USED (GND)
31	XIN		CLOCK 4.00 MHz (IN)
32	XOUT		CLOCK 4.00 MHz (OUT)
33	RESET	RES	L SYSTEM RESET
34	HOLD	PDW	L POWER DOWN CHECK
35	R80	FXRC	L REMOTE CONTROL INPUT (RC-5)
36	R81	EN1	MODEL SELECT 1
37	R82	EN2	MODEL SELECT 2
38	R83	EN3	MODEL SELECT 3
39	R90	TXRC	L SERIAL DATA(RC-5 REMOTE CONTROL)
40	R91	ENTX	L ENABLE (REMOTE CONTROL)
41	R92	RELY	L STAND-BY RELAY CONTROL
42	VDD		POWER SUPPLY

#### MICROPROCESSOR (SDIP42-P-600) Position NO.7401


SDIP42-P-600

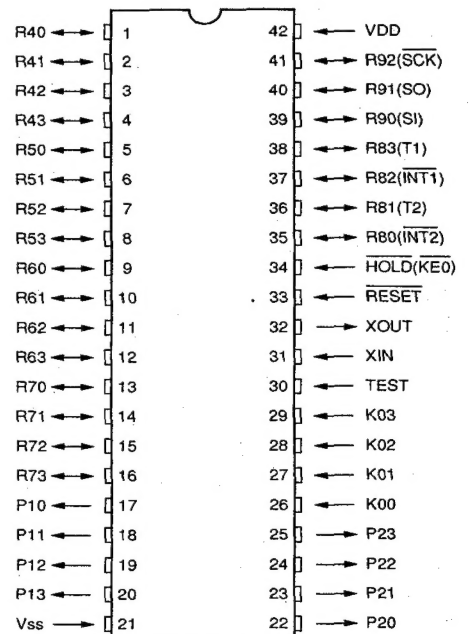


TA7317P (Position NO.7290)

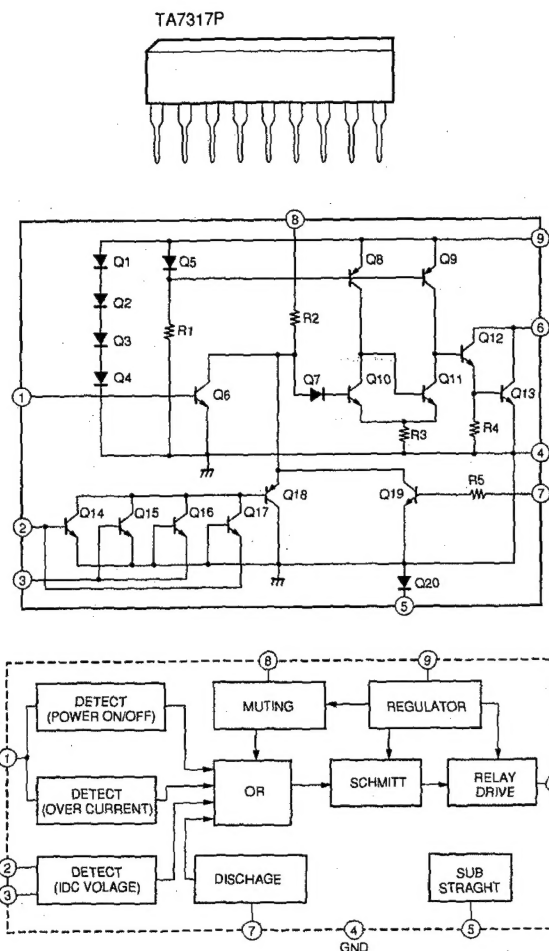


LB1641(Position NO.7402)

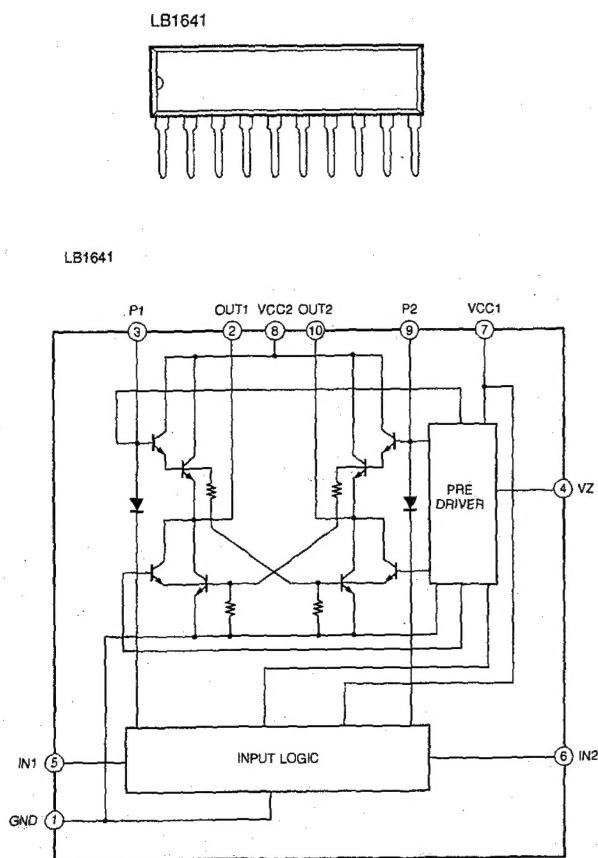


NJM2068 (Position NO.7501,7502,7503)

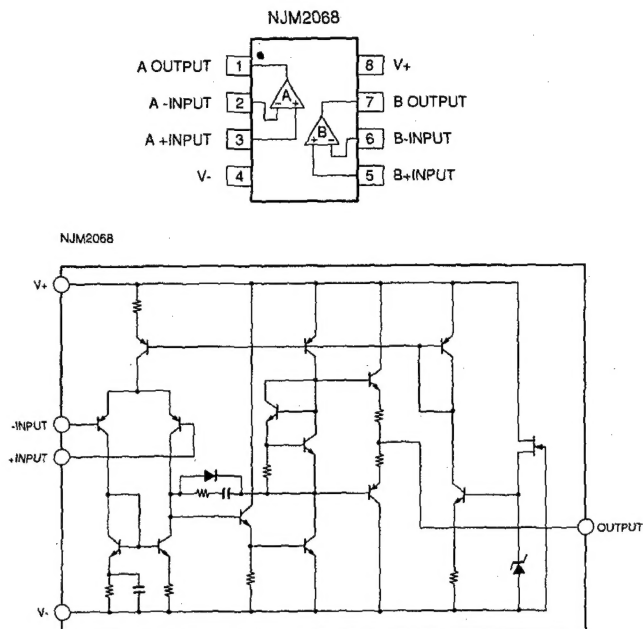


PC817 (Position NO.7269,7270)

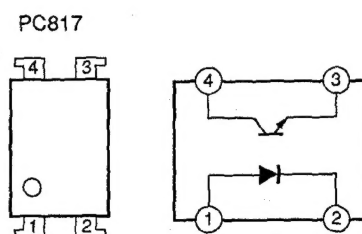


NJM2114(Position NO.7555,7655)

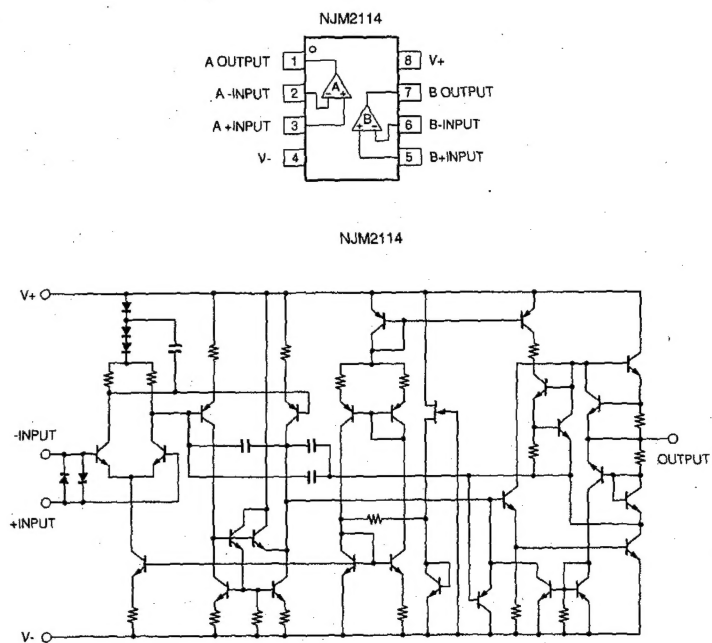

#### 4. BLOCK DIAGRAM


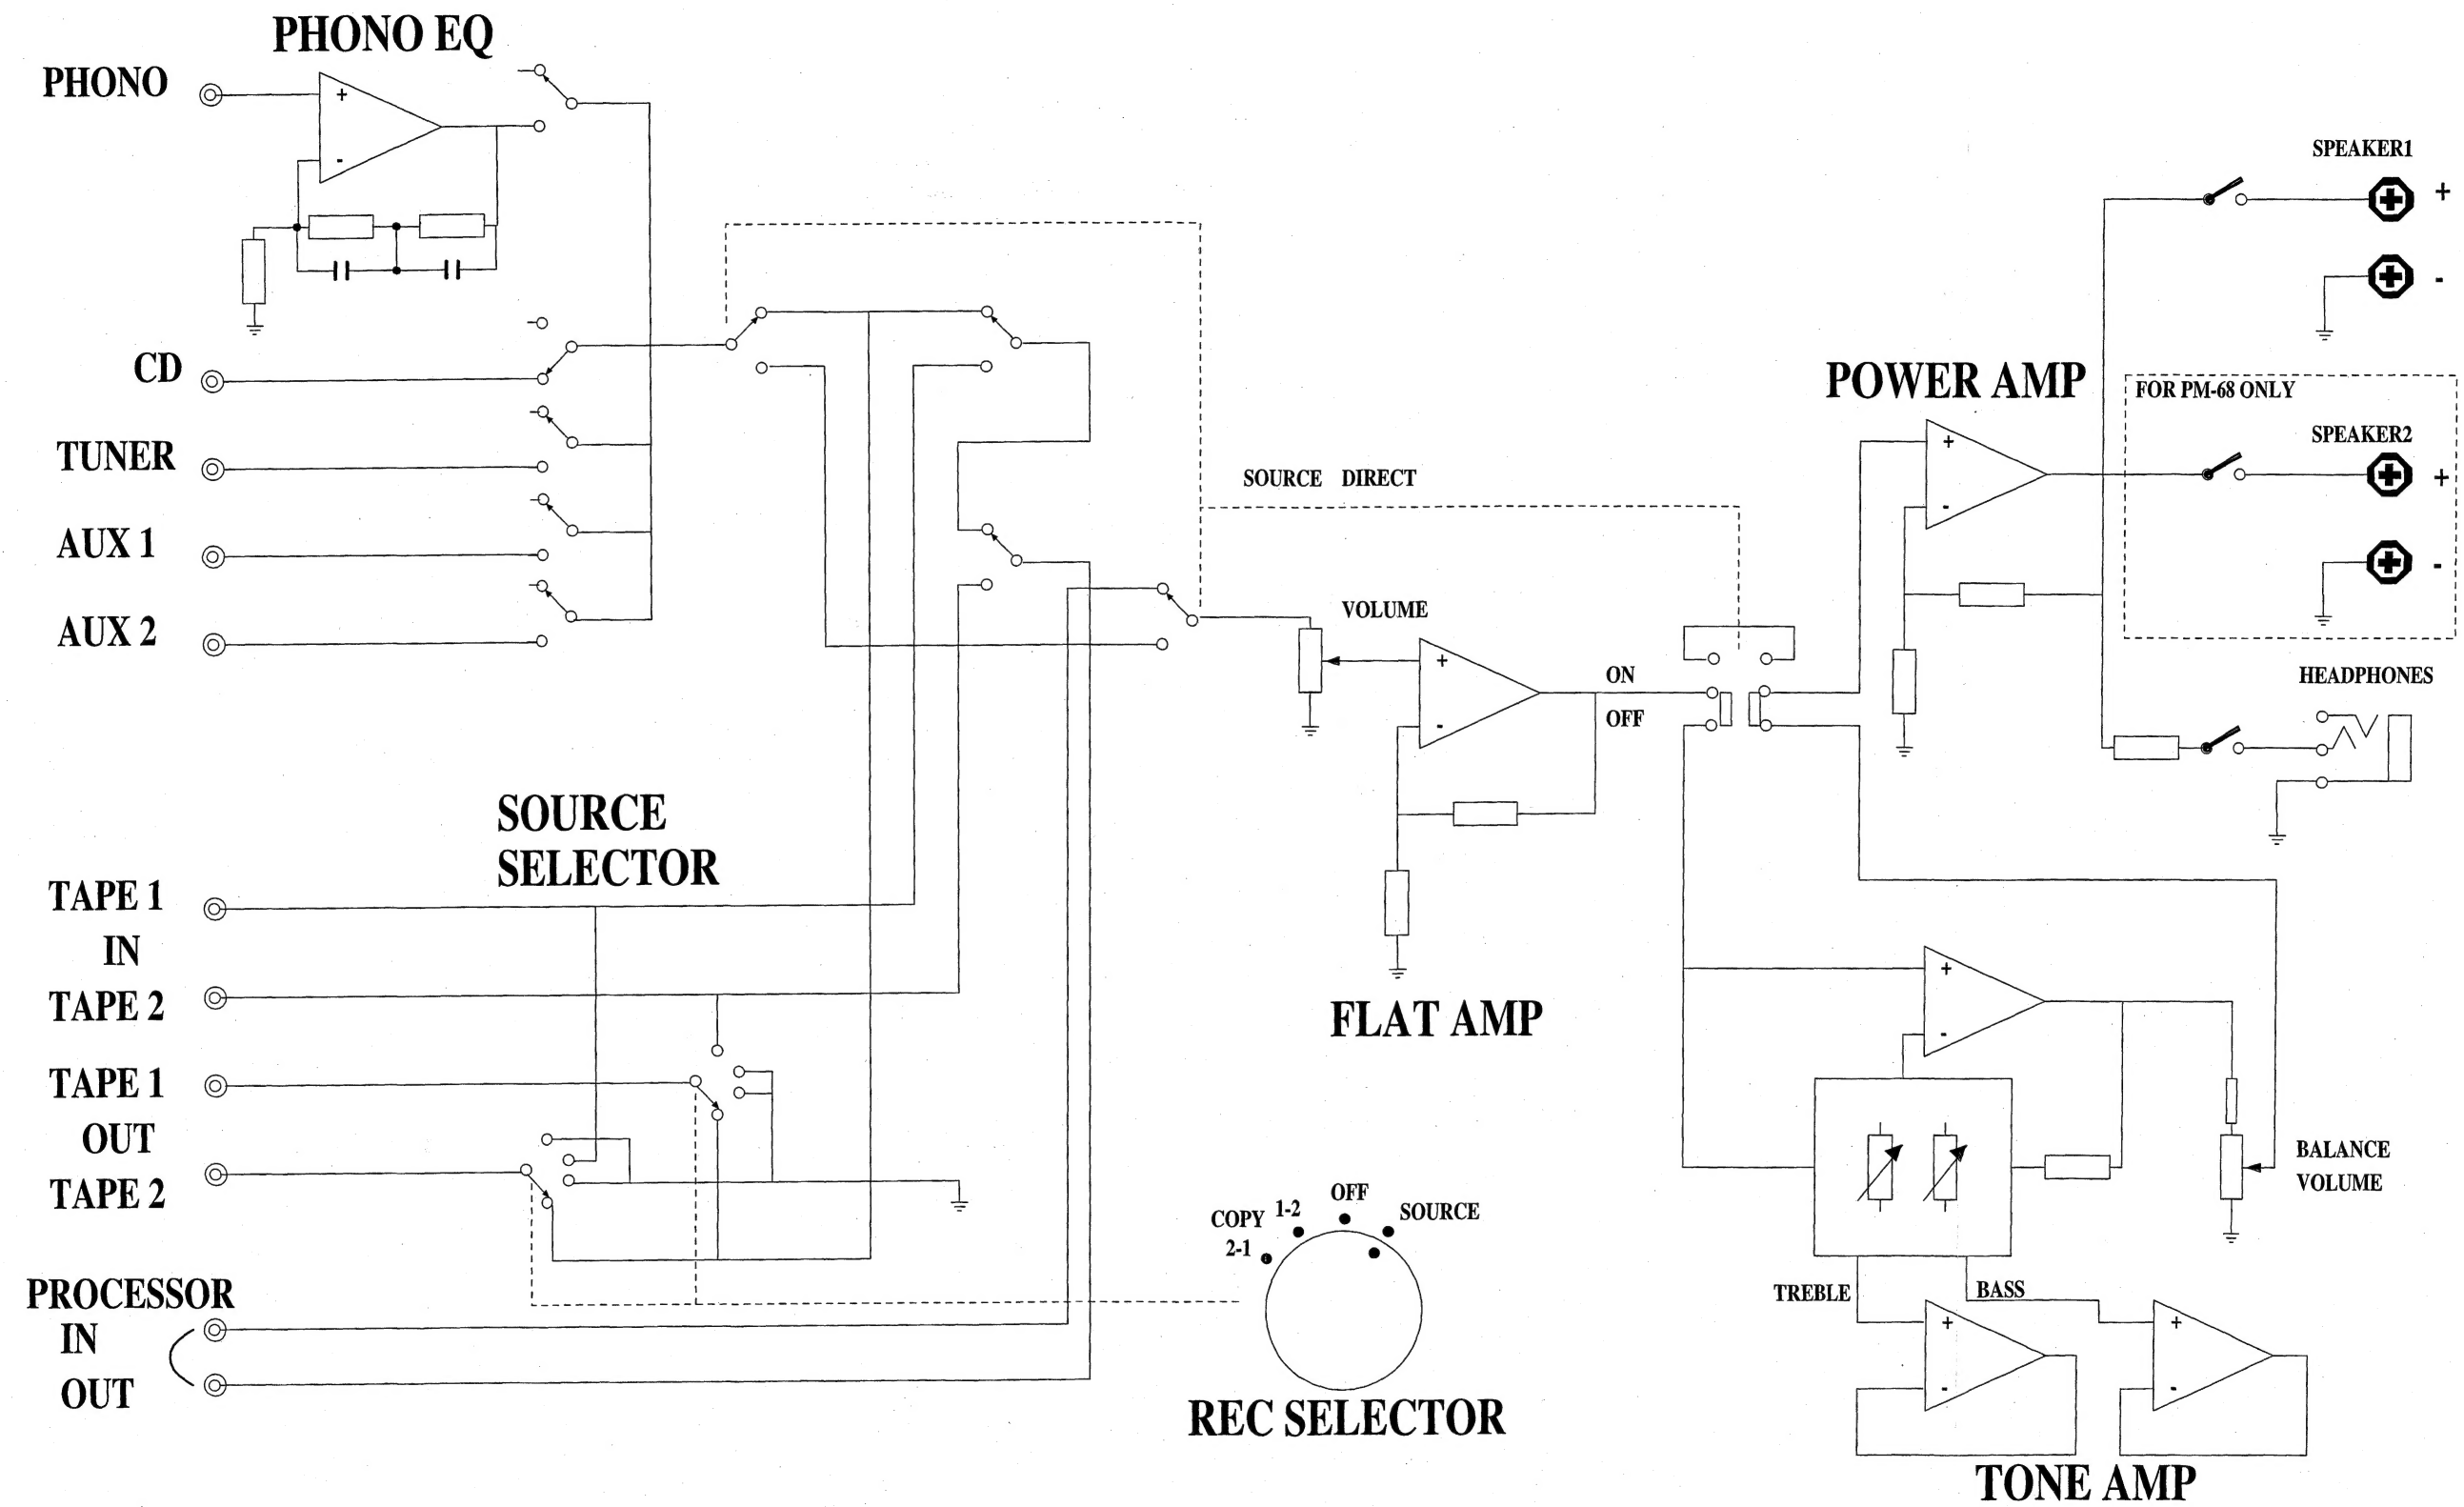


5. WIRING DIAGRAM

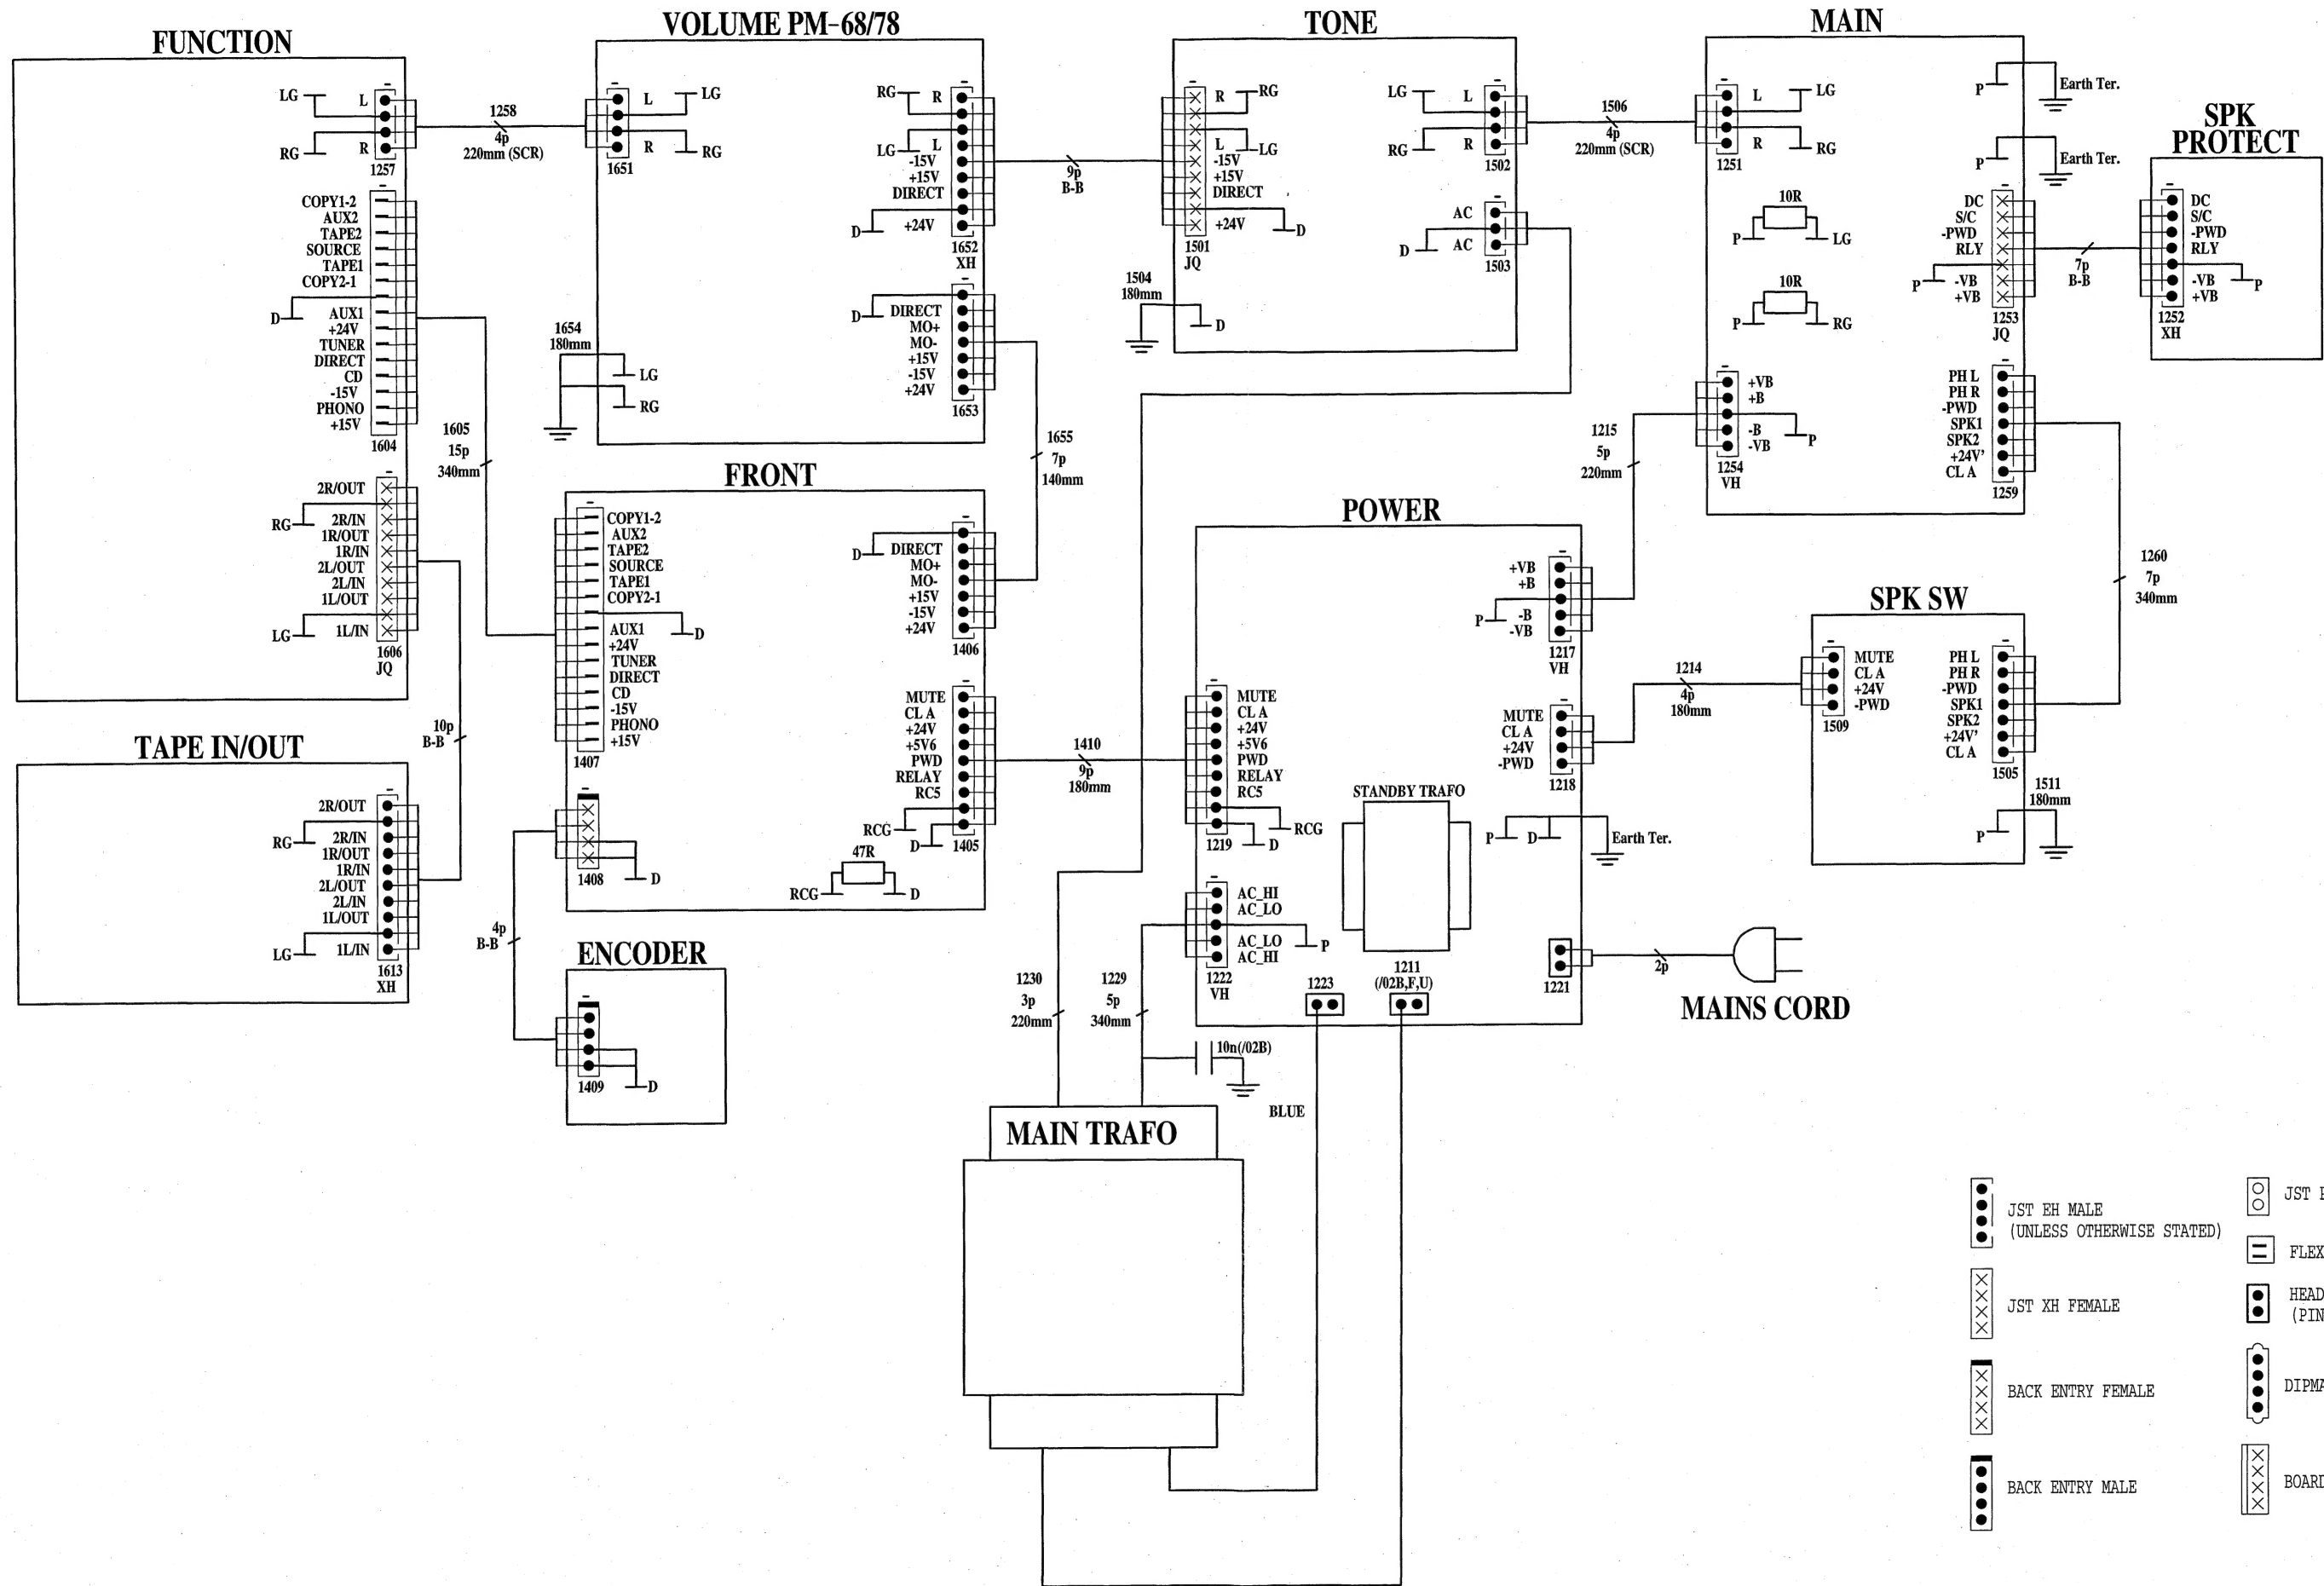


## POWER CIRCUIT II



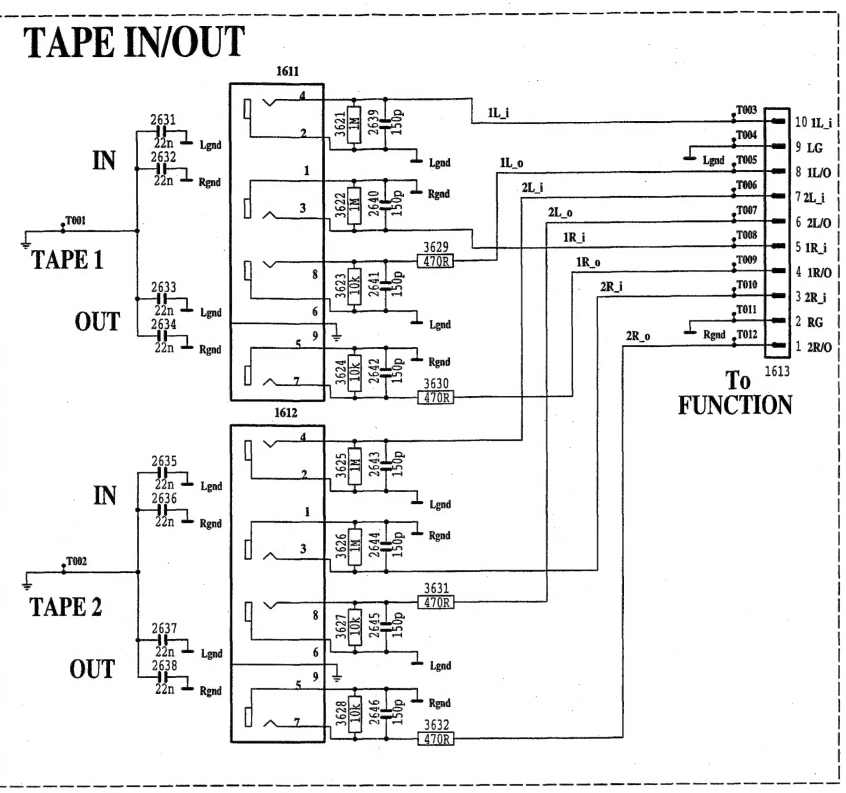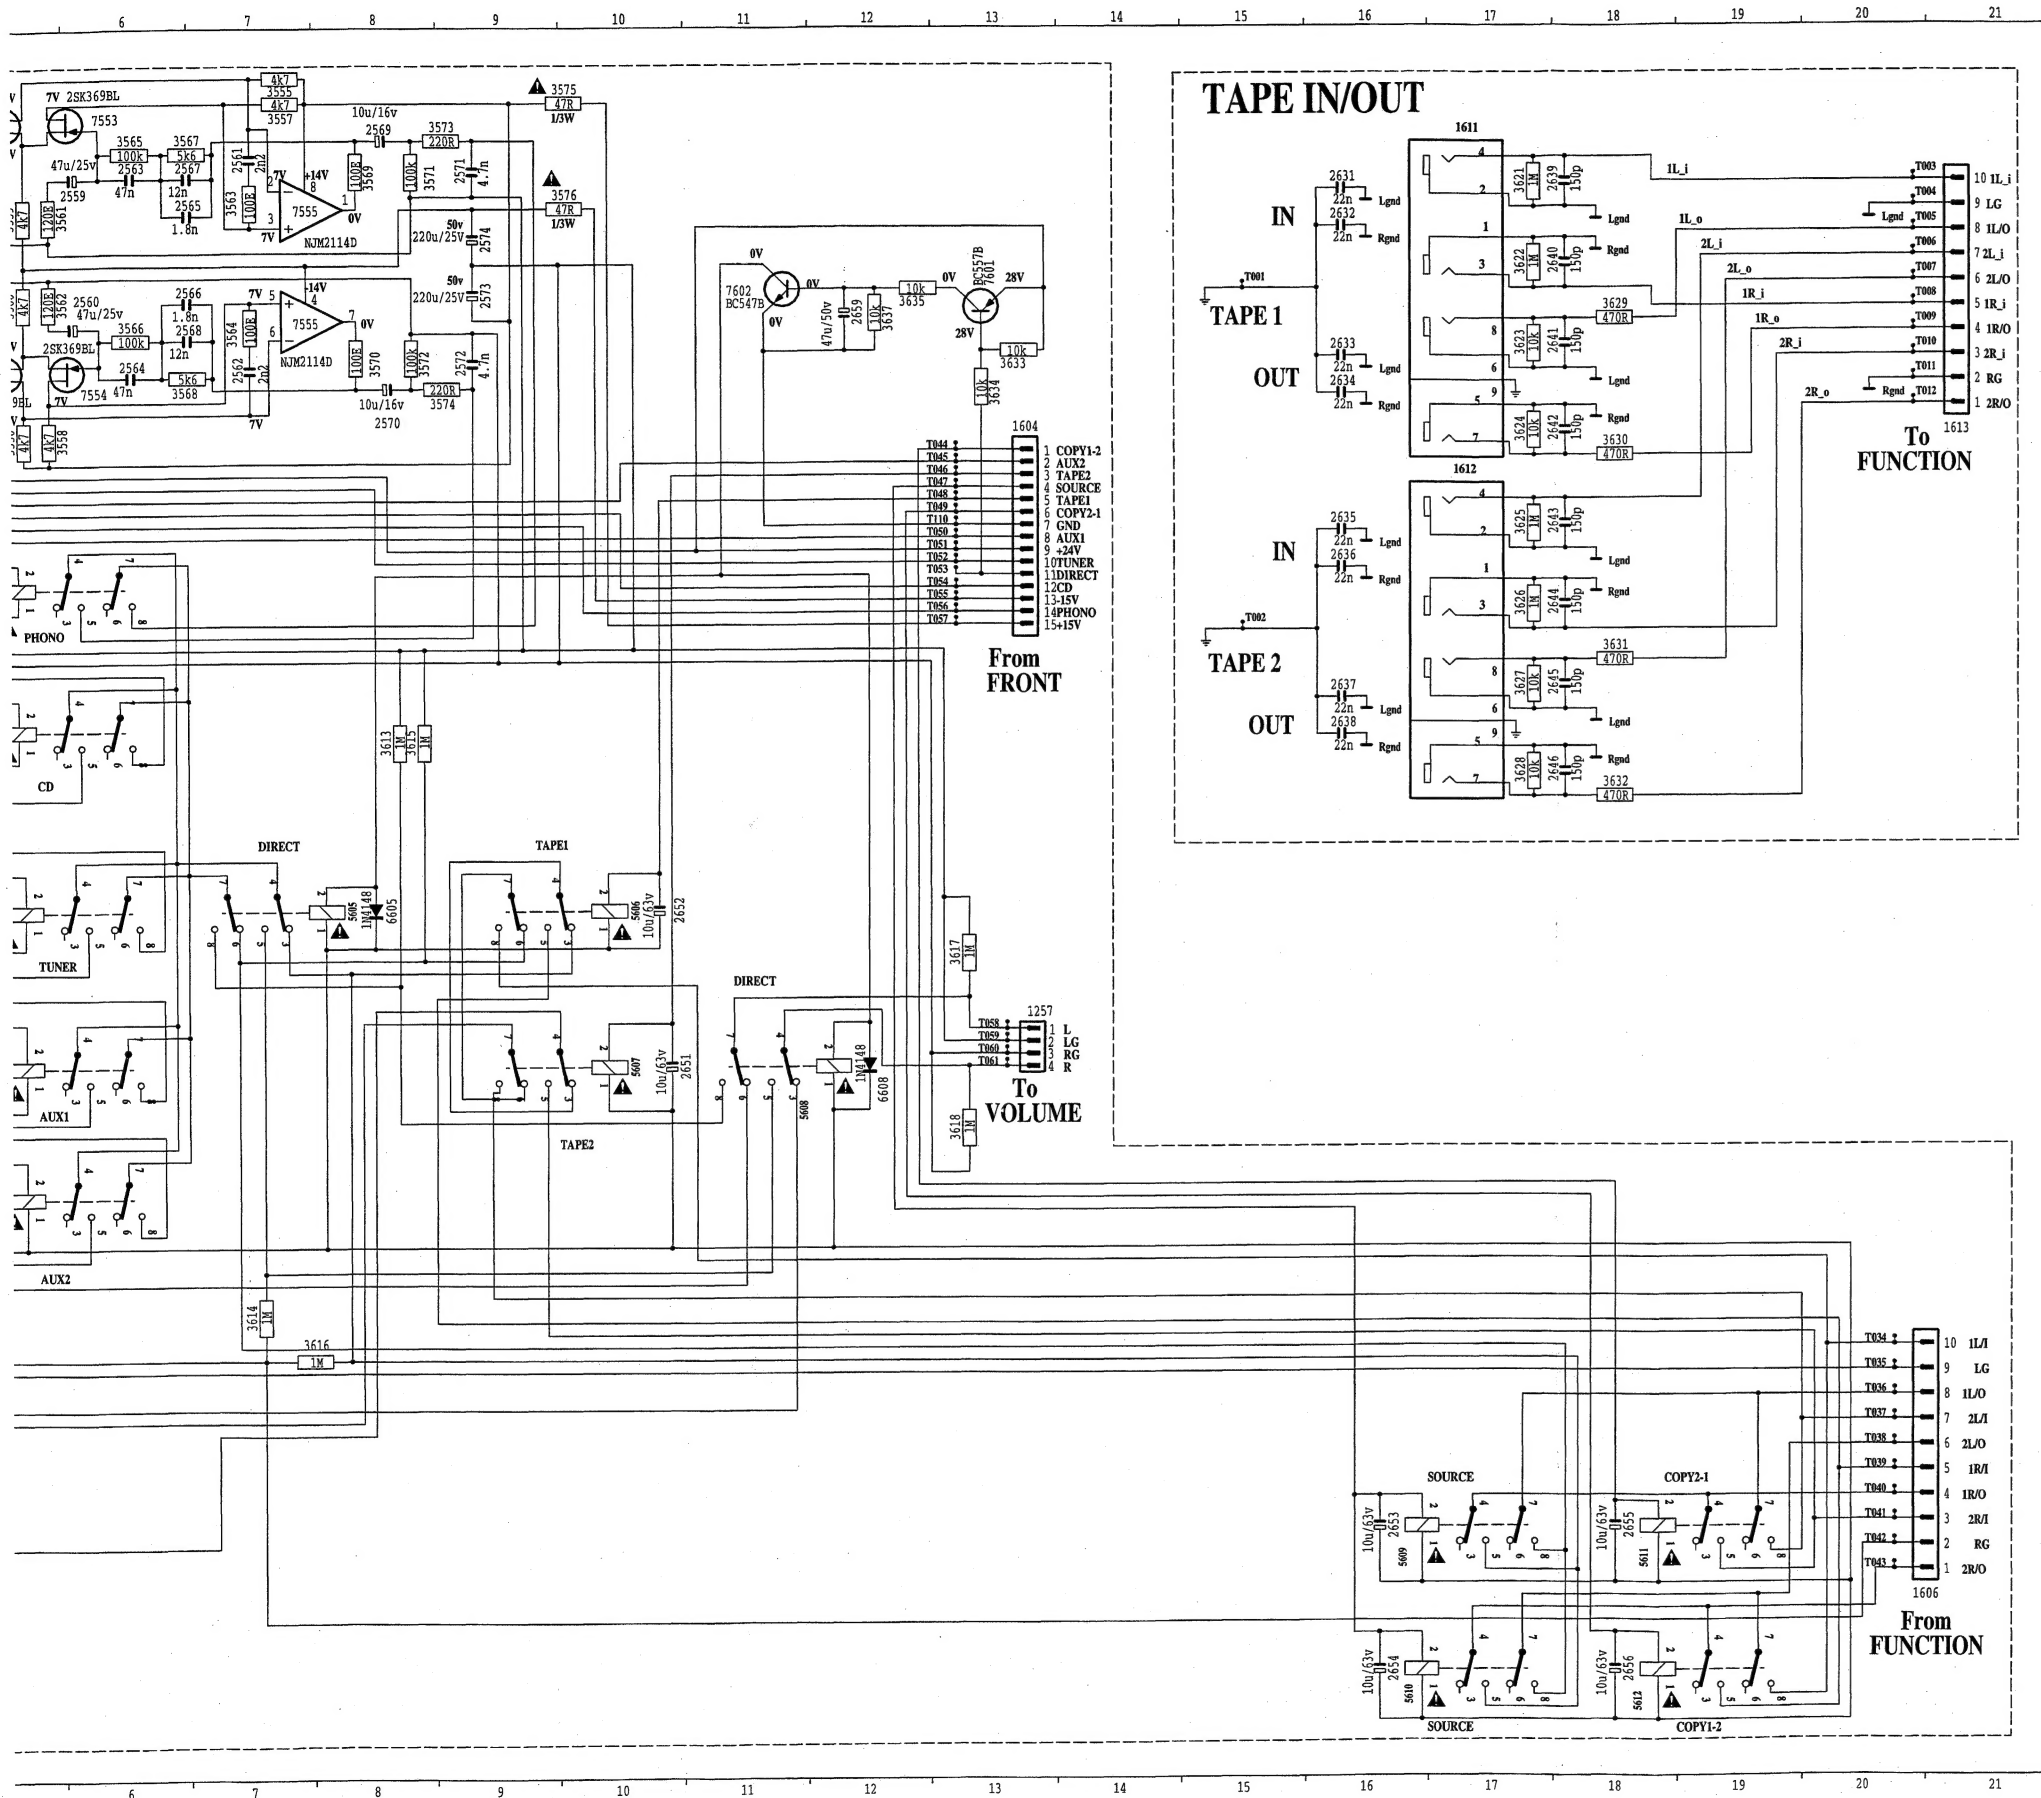


1257	H13	5604	1
1258	H13	5605	2
1259	H13	5606	3
1260	H13	5607	4
1261	H13	5608	5
1262	H13	5609	6
1263	H13	5610	7
1264	H13	5611	8
1265	H13	5612	9
1266	H13	5613	10
1267	H13	5614	11
1268	H13	5615	12
1269	H13	5616	13
1270	H13	5617	14
1271	H13	5618	15
1272	H13	5619	16
1273	H13	5620	17
1274	H13	5621	18
1275	H13	5622	19
1276	H13	5623	20
1277	H13	5624	21
1278	H13	5625	22
1279	H13	5626	23
1280	H13	5627	24
1281	H13	5628	25
1282	H13	5629	26
1283	H13	5630	27
1284	H13	5631	28
1285	H13	5632	29
1286	H13	5633	30
1287	H13	5634	31
1288	H13	5635	32
1289	H13	5636	33
1290	H13	5637	34
1291	H13	5638	35
1292	H13	5639	36
1293	H13	5640	37
1294	H13	5641	38
1295	H13	5642	39
1296	H13	5643	40
1297	H13	5644	41
1298	H13	5645	42
1299	H13	5646	43
1300	H13	5647	44
1301	H13	5648	45
1302	H13	5649	46
1303	H13	5650	47
1304	H13	5651	48
1305	H13	5652	49
1306	H13	5653	50
1307	H13	5654	51
1308	H13	5655	52
1309	H13	5656	53
1310	H13	5657	54
1311	H13	5658	55
1312	H13	5659	56
1313	H13	5660	57
1314	H13	5661	58
1315	H13	5662	59
1316	H13	5663	60
1317	H13	5664	61
1318	H13	5665	62
1319	H13	5666	63
1320	H13	5667	64
1321	H13	5668	65
1322	H13	5669	66
1323	H13	5670	67
1324	H13	5671	68
1325	H13	5672	69
1326	H13	5673	70
1327	H13	5674	71
1328	H13	5675	72
1329	H13	5676	73
1330	H13	5677	74
1331	H13	5678	75
1332	H13	5679	76
1333	H13	5680	77
1334	H13	5681	78
1335	H13	5682	79
1336	H13	5683	80
1337	H13	5684	81
1338	H13	5685	82
1339	H13	5686	83
1340	H13	5687	84
1341	H13	5688	85
1342	H13	5689	86
1343	H13	5690	87
1344	H13	5691	88
1345	H13	5692	89
1346	H13	5693	90
1347	H13	5694	91
1348	H13	5695	92
1349	H13	5696	93
1350	H13	5697	94
1351	H13	5698	95
1352	H13	5699	96
1353	H13	5700	97
1354	H13	5701	98
1355	H13	5702	99
1356	H13	5703	100

## POWER CIRCUIT I (PM-68)

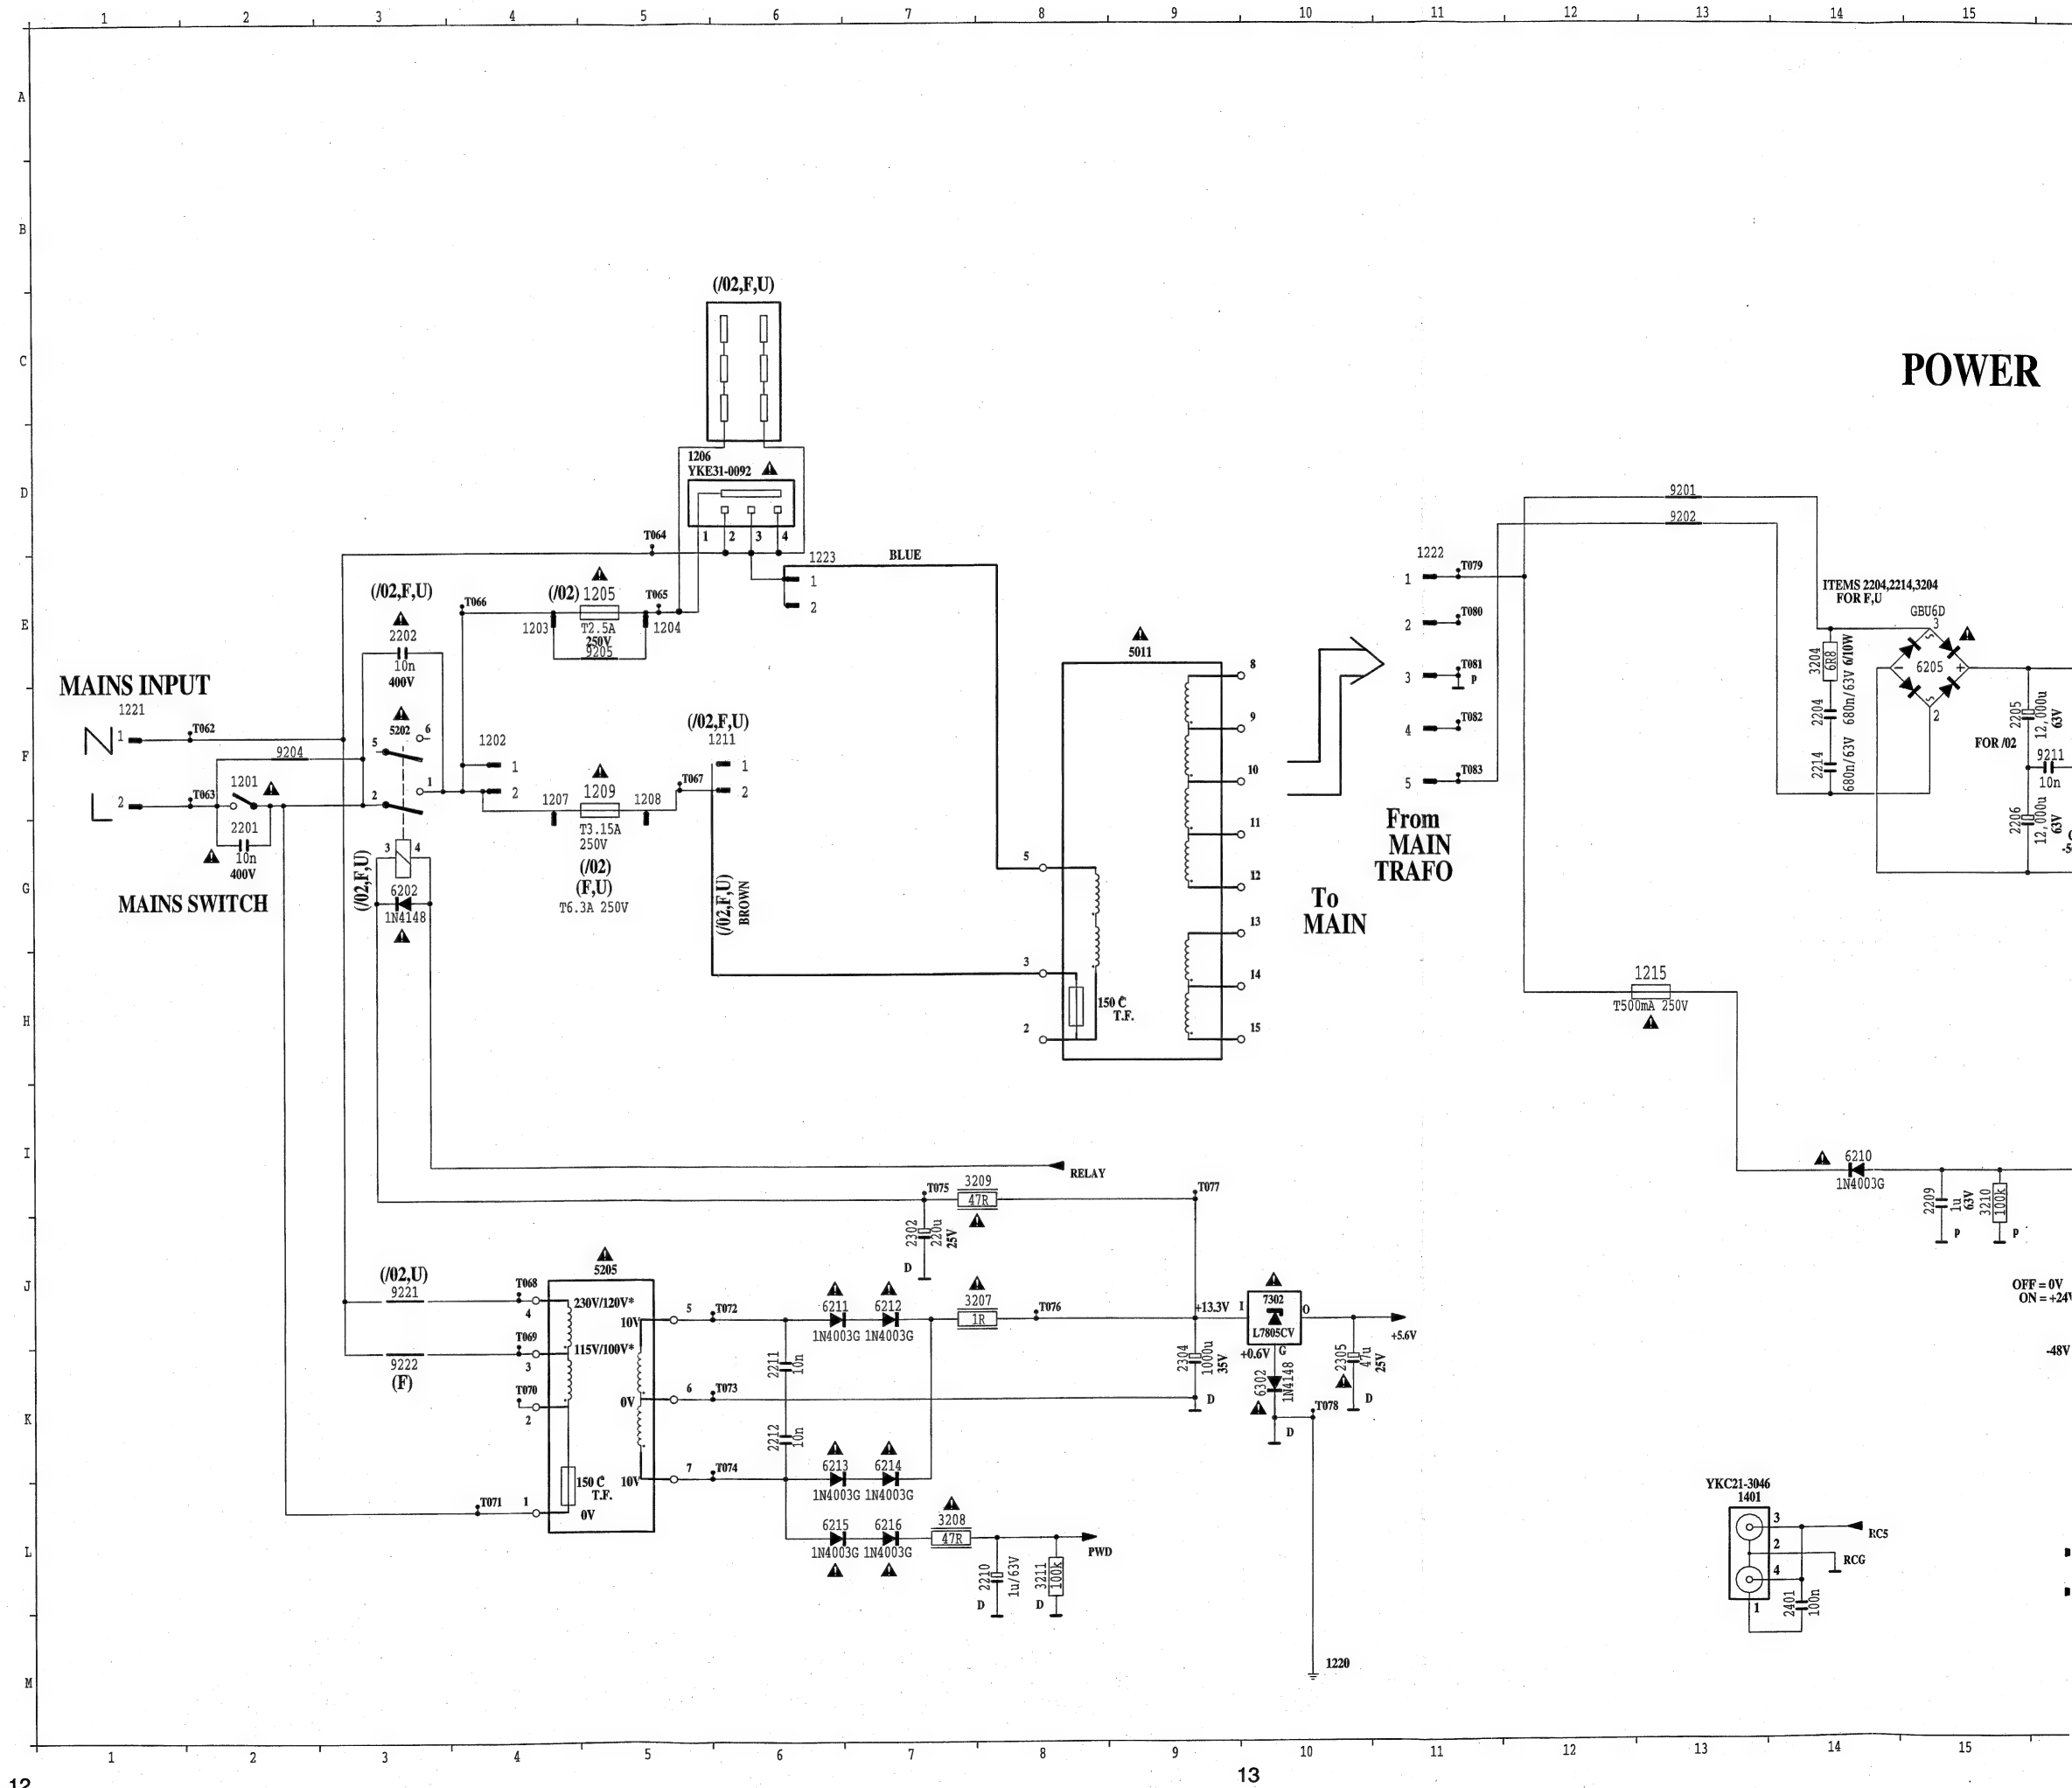



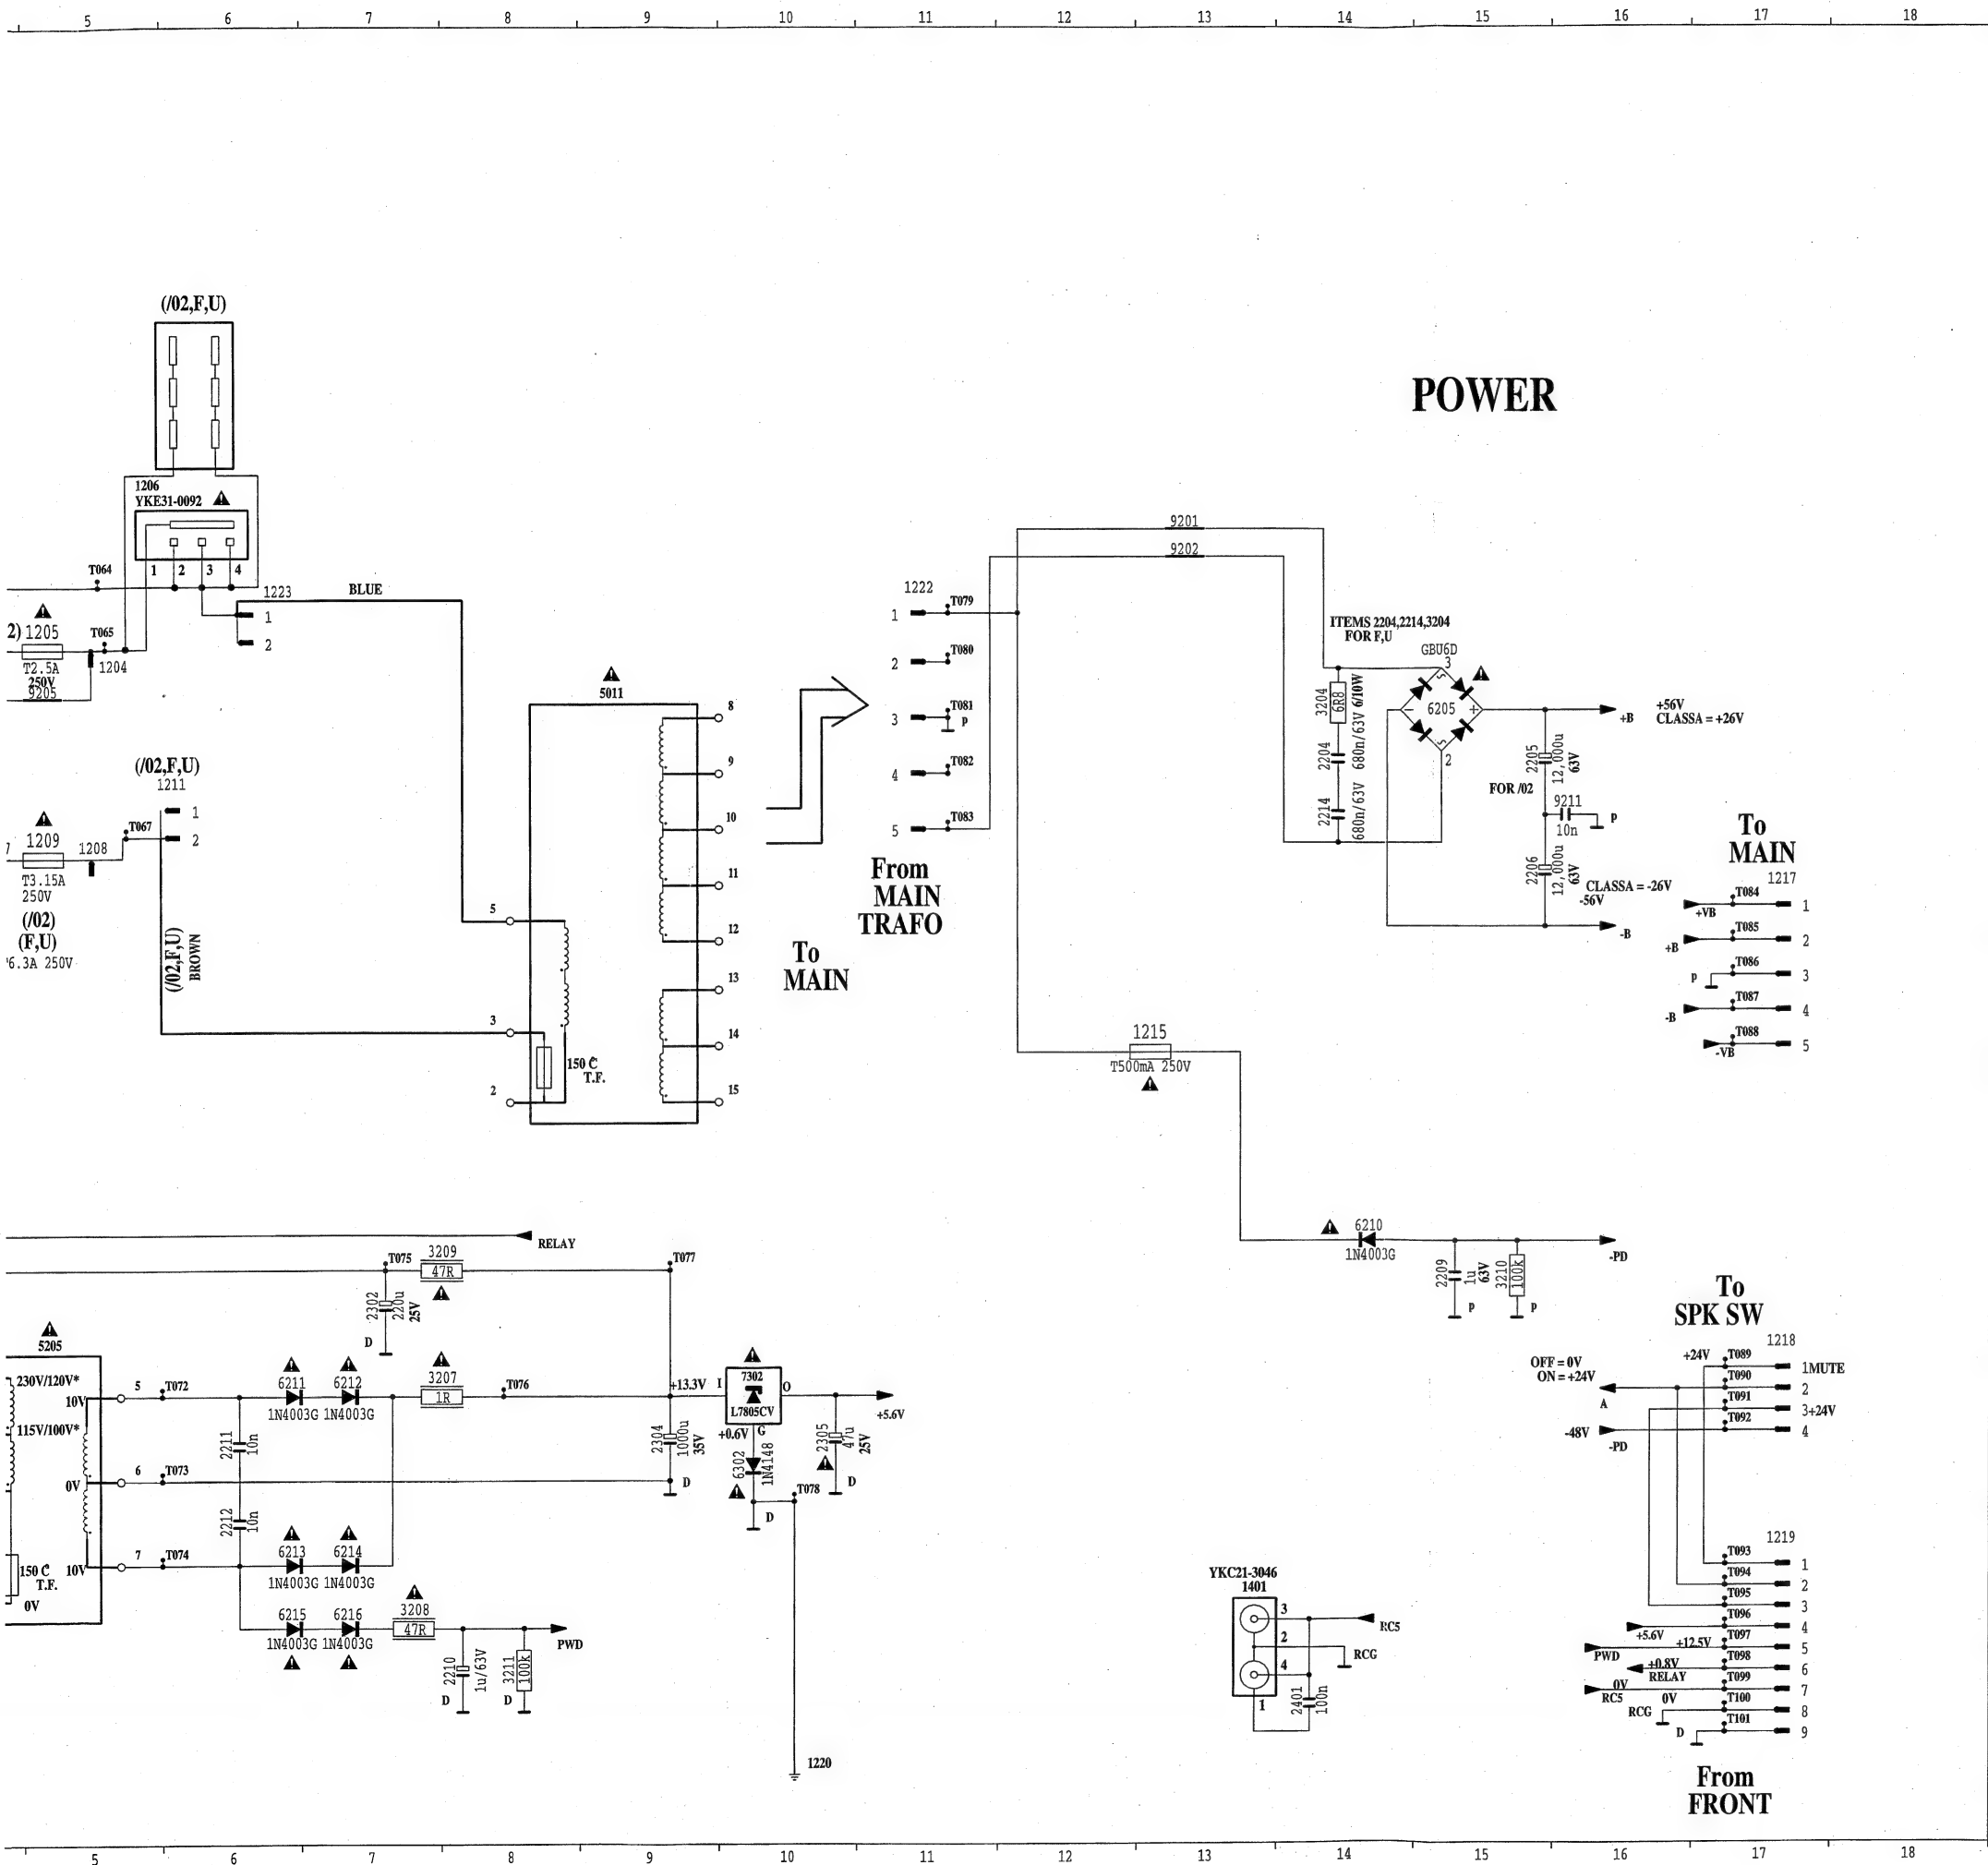


POWER

1201	F	2
1202	F	2
1203	F	2
1204	F	2
1205	F	2
1206	F	2
1207	F	2
1208	F	2
1209	F	2
1210	F	2
1211	F	2
1212	F	2
1213	F	2
1214	F	2
1215	F	2
1216	F	2
1217	F	2
1218	F	2
1219	F	2
1220	F	2
1221	F	2
1222	F	2
1223	F	2
1224	F	2
1225	F	2
1226	F	2
1227	F	2
1228	F	2
1229	F	2
1230	F	2
1231	F	2
1232	F	2
1233	F	2
1234	F	2
1235	F	2
1236	F	2
1237	F	2
1238	F	2
1239	F	2
1240	F	2
1241	F	2
1242	F	2
1243	F	2
1244	F	2
1245	F	2
1246	F	2
1247	F	2
1248	F	2
1249	F	2
1250	F	2
1251	F	2
1252	F	2
1253	F	2
1254	F	2
1255	F	2
1256	F	2
1257	F	2
1258	F	2
1259	F	2
1260	F	2
1261	F	2
1262	F	2
1263	F	2
1264	F	2
1265	F	2
1266	F	2
1267	F	2
1268	F	2
1269	F	2
1270	F	2
1271	F	2
1272	F	2
1273	F	2
1274	F	2
1275	F	2
1276	F	2
1277	F	2
1278	F	2
1279	F	2
1280	F	2
1281	F	2
1282	F	2
1283	F	2
1284	F	2
1285	F	2
1286	F	2
1287	F	2
1288	F	2
1289	F	2
1290	F	2
1291	F	2
1292	F	2
1293	F	2
1294	F	2
1295	F	2
1296	F	2
1297	F	2
1298	F	2
1299	F	2
1300	F	2
1301	F	2
1302	F	2
1303	F	2
1304	F	2
1305	F	2
1306	F	2
1307	F	2
1308	F	2
1309	F	2
1310	F	2
1311	F	2
1312	F	2
1313	F	2
1314	F	2
1315	F	2
1316	F	2
1317	F	2
1318	F	2
1319	F	2
1320	F	2
1321	F	2
1322	F	2
1323	F	2
1324	F	2
1325	F	2
1326	F	2
1327	F	2
1328	F	2
1329	F	2
1330	F	2
1331	F	2
1332	F	2
1333	F	2
1334	F	2
1335	F	2
1336	F	2
1337	F	2
1338	F	2
1339	F	2
1340	F	2
1341	F	2
1342	F	2
1343	F	2
1344	F	2
1345	F	2
1346	F	2
1347	F	2
1348	F	2
1349	F	2
1350	F	2
1351	F	2
1352	F	2
1353	F	2
1354	F	2
1355	F	2
1356	F	2
1357	F	2
1358	F	2
1359	F	2
1360	F	2
1361	F	2
1362	F	2
1363	F	2
1364	F	2
1365	F	2
1366	F	2
1367	F	2
1368	F	2
1369	F	2
1370	F	2
1371	F	2
1372	F	2
1373	F	2
1374	F	2
1375	F	2
1376	F	2
1377	F	2
1378	F	2
1379	F	2
1380	F	2
1381	F	2
1382	F	2
1383	F	2
1384	F	2
1385	F	2
1386	F	2
1387	F	2
1388	F	2
1389	F	2
1390	F	2
1391	F	2
1392	F	2
1393	F	2
1394	F	2
1395	F	2
1396	F	2
1397	F	2
1398	F	2
1399	F	2
1400	F	2
1401	F	2
1402	F	2
1403	F	2
1404	F	2
1405	F	2
1406	F	2
1407	F	2
1408	F	2
1409	F	2
1410	F	2
1411	F	2
1412	F	2
1413	F	2
1414	F	2
1415	F	2
1416	F	2
1417	F	2
1418	F	2
1419	F	2
1420	F	2
1421	F	2
1422	F	2
1423	F	2
1424	F	2
1425	F	2
1426	F	2
1427	F	2
1428	F	2
1429	F	2
1430	F	2
1431	F	2
1432	F	2
1433	F	2
1434	F	2
1435	F	2
1436	F	2
1437	F	2
1438	F	2
1439	F	2
1440	F	2
1441	F	2
1442	F	2
1443	F	2
1444	F	2
1445	F	2
1446	F	2
1447	F	2
1448	F	2
1449	F	2
1450	F	2
1451	F	2
1452	F	2
1453	F	2
1454	F	2
1455	F	2
1456	F	2
1457	F	2
1458	F	2
1459	F	2
1460	F	2
1461	F	2
1462	F	2
1463	F	2
1464	F	2
1465	F	2
1466	F	2
1467	F	2
1468	F	2
1469	F	2
1470	F	2
1471	F	2
1472	F	2
1473	F	2
1474	F	2
1475	F	2
1476	F	2
1477	F	2
1478	F	2
1479	F	2
1480	F	2
1481	F	2
1482	F	2
1483	F	2
1484	F	2
1485	F	2
1486	F	2
1487	F	2
1488	F	2
1489	F	2
1490	F	2
1491	F	2
1492	F	2
1493	F	2
1494	F	2
1495	F	2
1496	F	2
1497	F	2
1498	F	2
1499	F	2
1500	F	2





# POWER







## CONTROL CIRCUIT I (PM-68)

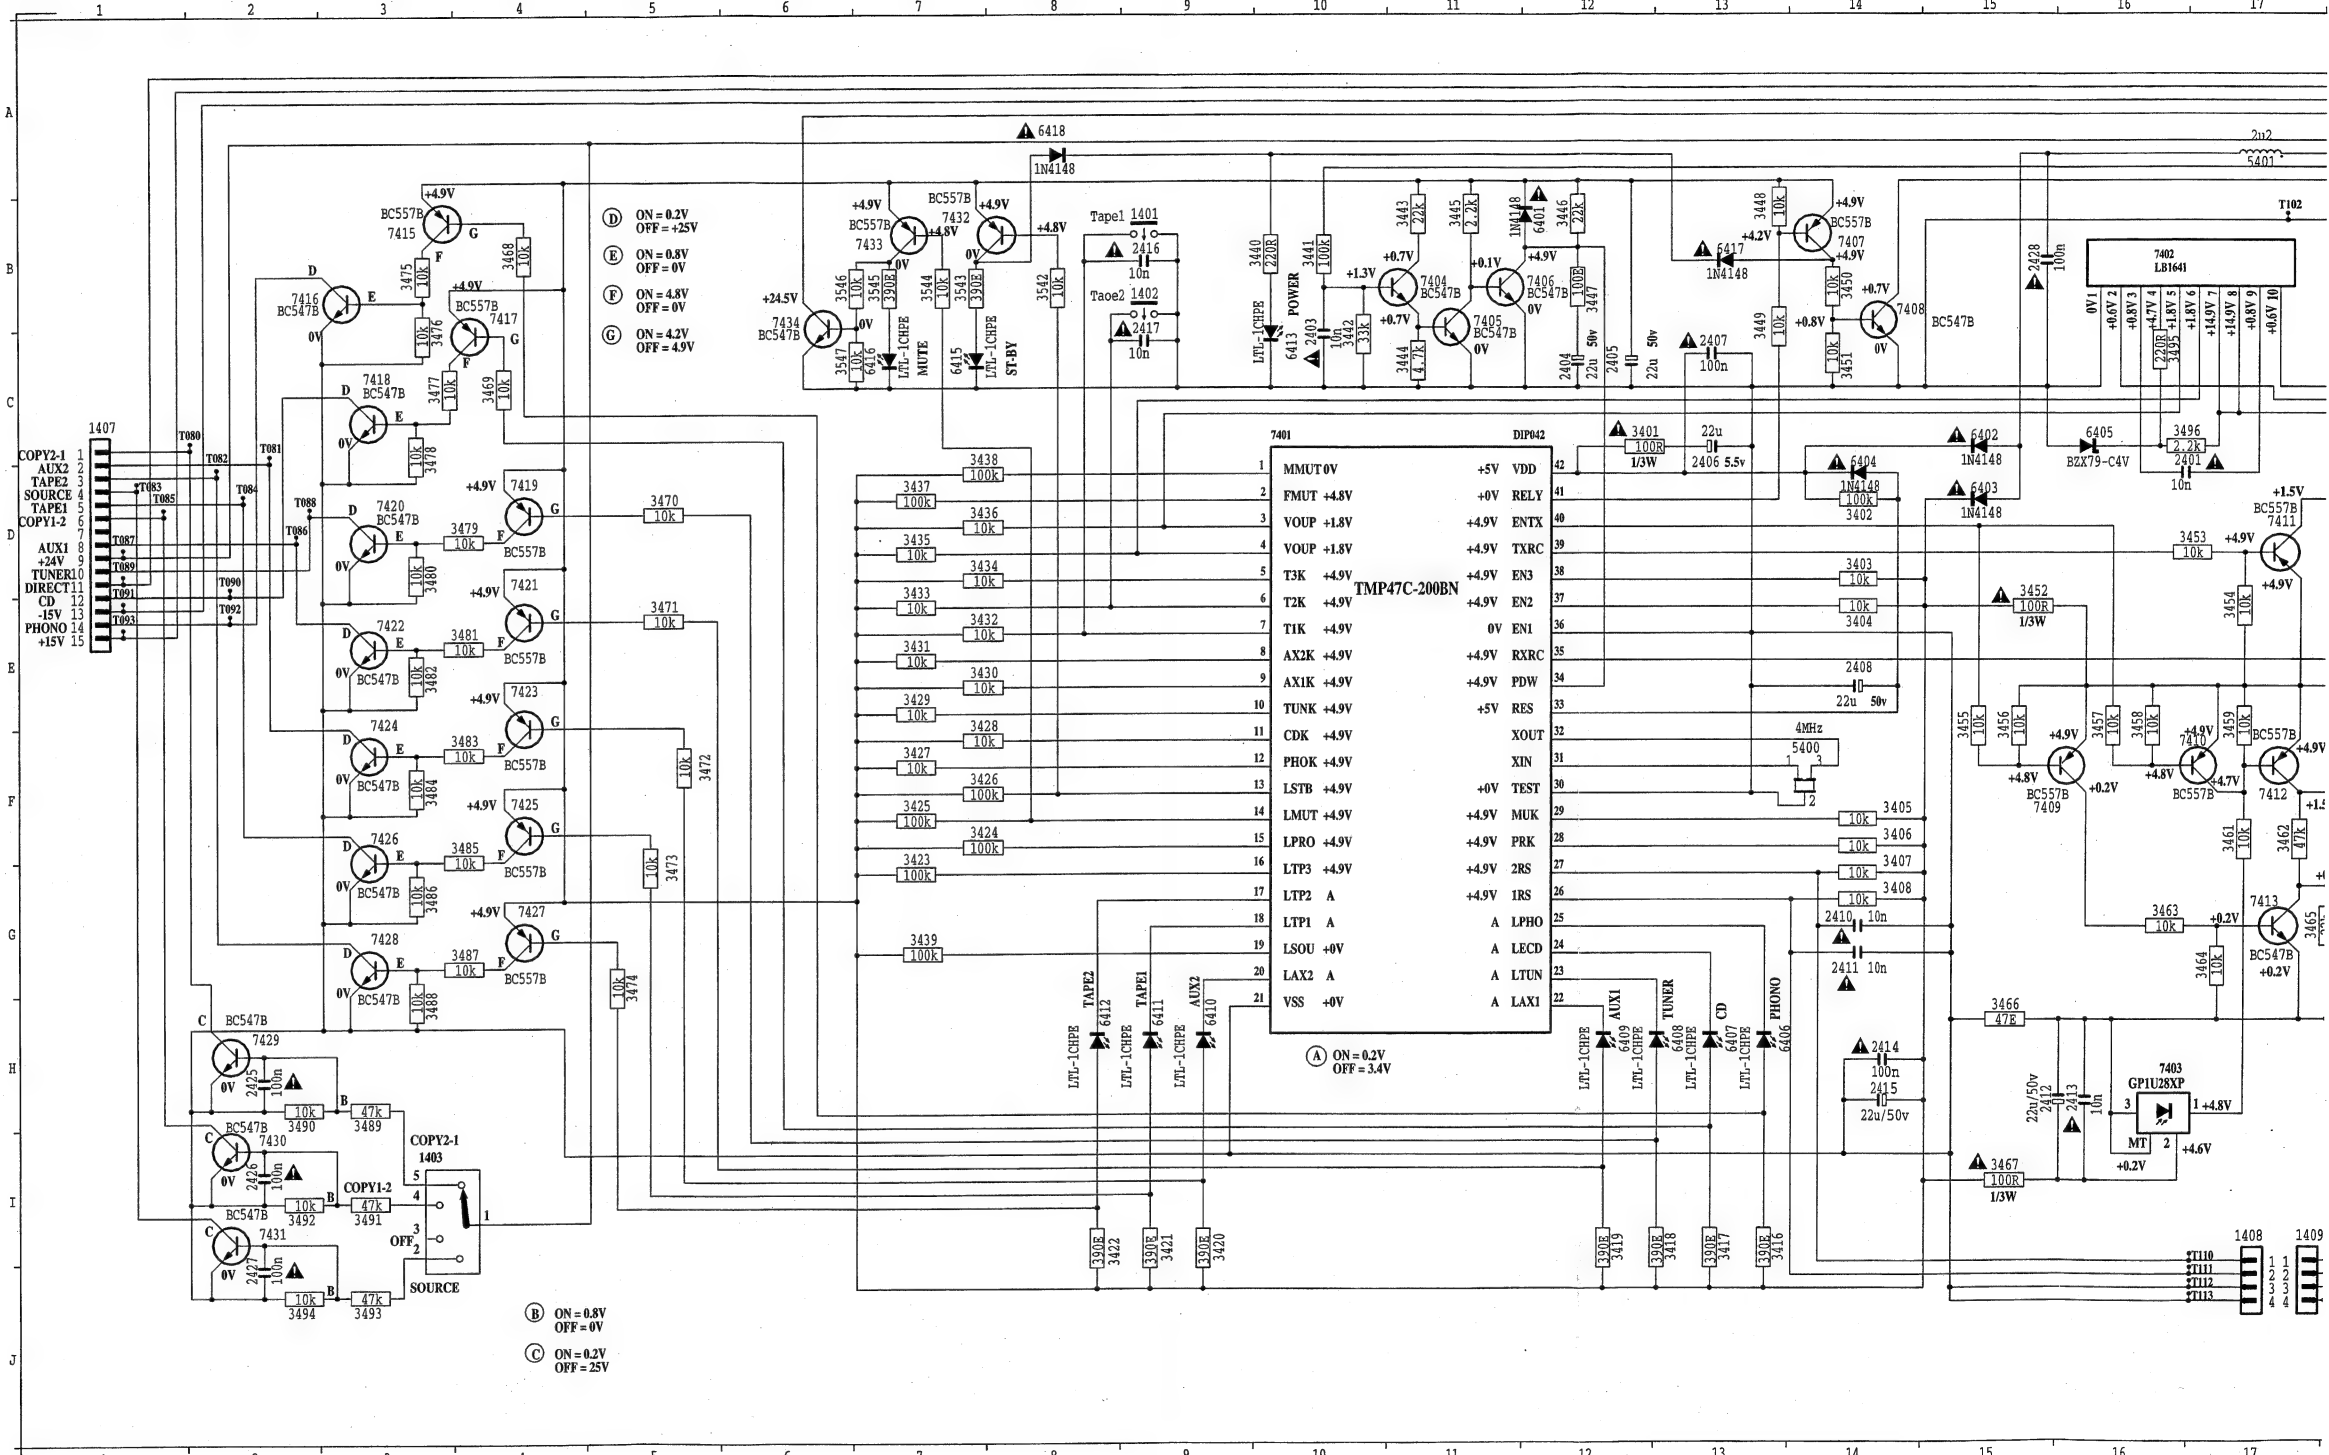

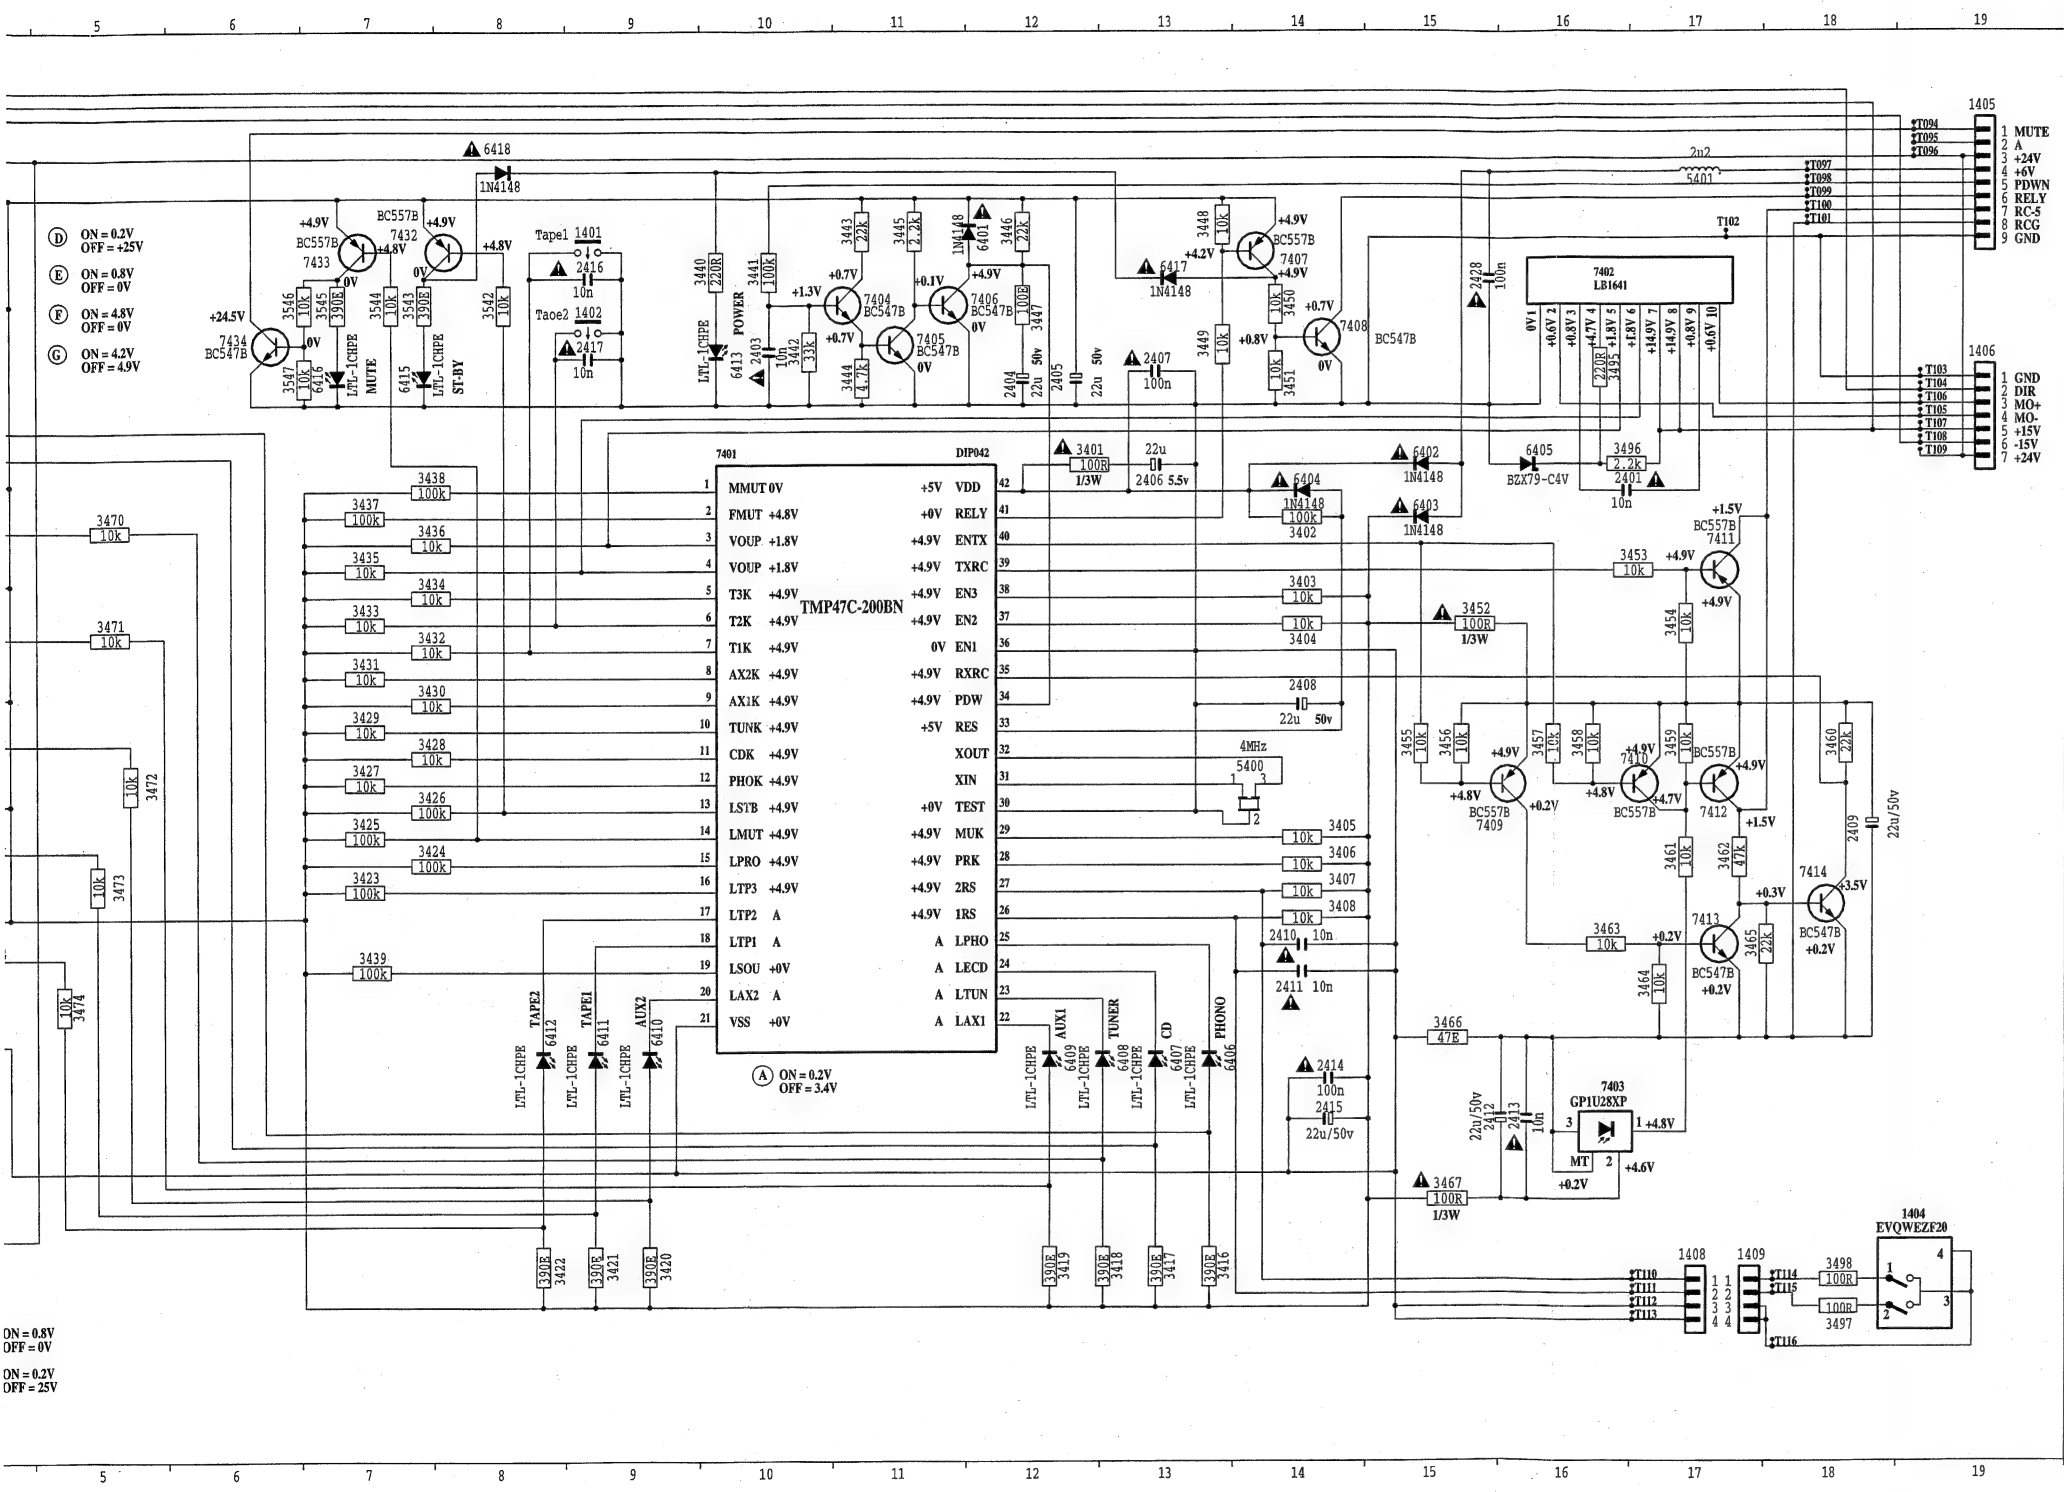


1401	B	9	3493	J	3
1402	B	9	3494	J	3
1403	B	9	3495	J	3
1404	B	9	3496	J	3
1405	B	9	3497	J	3
1406	B	9	3498	J	3
1407	B	9	3499	J	3
1408	B	9	3500	J	3
1409	B	9	3501	J	3
1410	B	9	3502	J	3
1411	B	9	3503	J	3
1412	B	9	3504	J	3
1413	B	9	3505	J	3
1414	B	9	3506	J	3
1415	B	9	3507	J	3
1416	B	9	3508	J	3
1417	B	9	3509	J	3
1418	B	9	3510	J	3
1419	B	9	3511	J	3
1420	B	9	3512	J	3
1421	B	9	3513	J	3
1422	B	9	3514	J	3
1423	B	9	3515	J	3
1424	B	9	3516	J	3
1425	B	9	3517	J	3
1426	B	9	3518	J	3
1427	B	9	3519	J	3
1428	B	9	3520	J	3
1429	B	9	3521	J	3
1430	B	9	3522	J	3
1431	B	9	3523	J	3
1432	B	9	3524	J	3
1433	B	9	3525	J	3
1434	B	9	3526	J	3
1435	B	9	3527	J	3
1436	B	9	3528	J	3
1437	B	9	3529	J	3
1438	B	9	3530	J	3
1439	B	9	3531	J	3
1440	B	9	3532	J	3
1441	B	9	3533	J	3
1442	B	9	3534	J	3
1443	B	9	3535	J	3
1444	B	9	3536	J	3
1445	B	9	3537	J	3
1446	B	9	3538	J	3
1447	B	9	3539	J	3
1448	B	9	3540	J	3
1449	B	9	3541	J	3
1450	B	9	3542	J	3
1451	B	9	3543	J	3
1452	B	9	3544	J	3
1453	B	9	3545	J	3
1454	B	9	3546	J	3
1455	B	9	3547	J	3
1456	B	9	3548	J	3
1457	B	9	3549	J	3
1458	B	9	3550	J	3
1459	B	9	3551	J	3
1460	B	9	3552	J	3
1461	B	9	3553	J	3
1462	B	9	3554	J	3
1463	B	9	3555	J	3
1464	B	9	3556	J	3
1465	B	9	3557	J	3
1466	B	9	3558	J	3
1467	B	9	3559	J	3
1468	B	9	3560	J	3
1469	B	9	3561	J	3
1470	B	9	3562	J	3
1471	B	9	3563	J	3
1472	B	9	3564	J	3
1473	B	9	3565	J	3
1474	B	9	3566	J	3
1475	B	9	3567	J	3
1476	B	9	3568	J	3
1477	B	9	3569	J	3
1478	B	9	3570	J	3
1479	B	9	3571	J	3
1480	B	9	3572	J	3
1481	B	9	3573	J	3
1482	B	9	3574	J	3
1483	B	9	3575	J	3
1484	B	9	3576	J	3
1485	B	9	3577	J	3
1486	B	9	3578	J	3
1487	B	9	3579	J	3
1488	B	9	3580	J	3
1489	B	9	3581	J	3
1490	B	9	3582	J	3
1491	B	9	3583	J	3
1492	B	9	3584	J	3

CONTROL CIRCUIT I (PM-78)

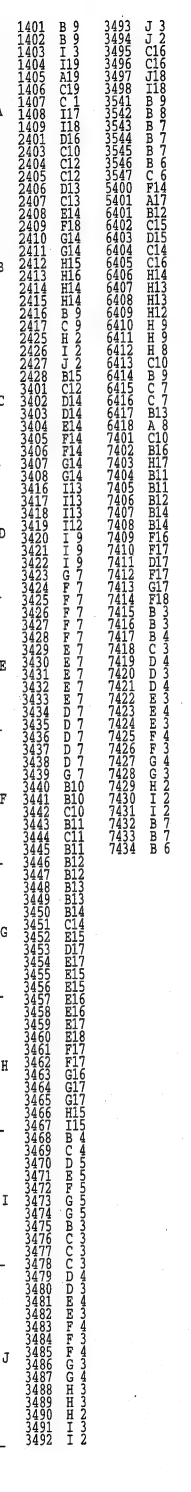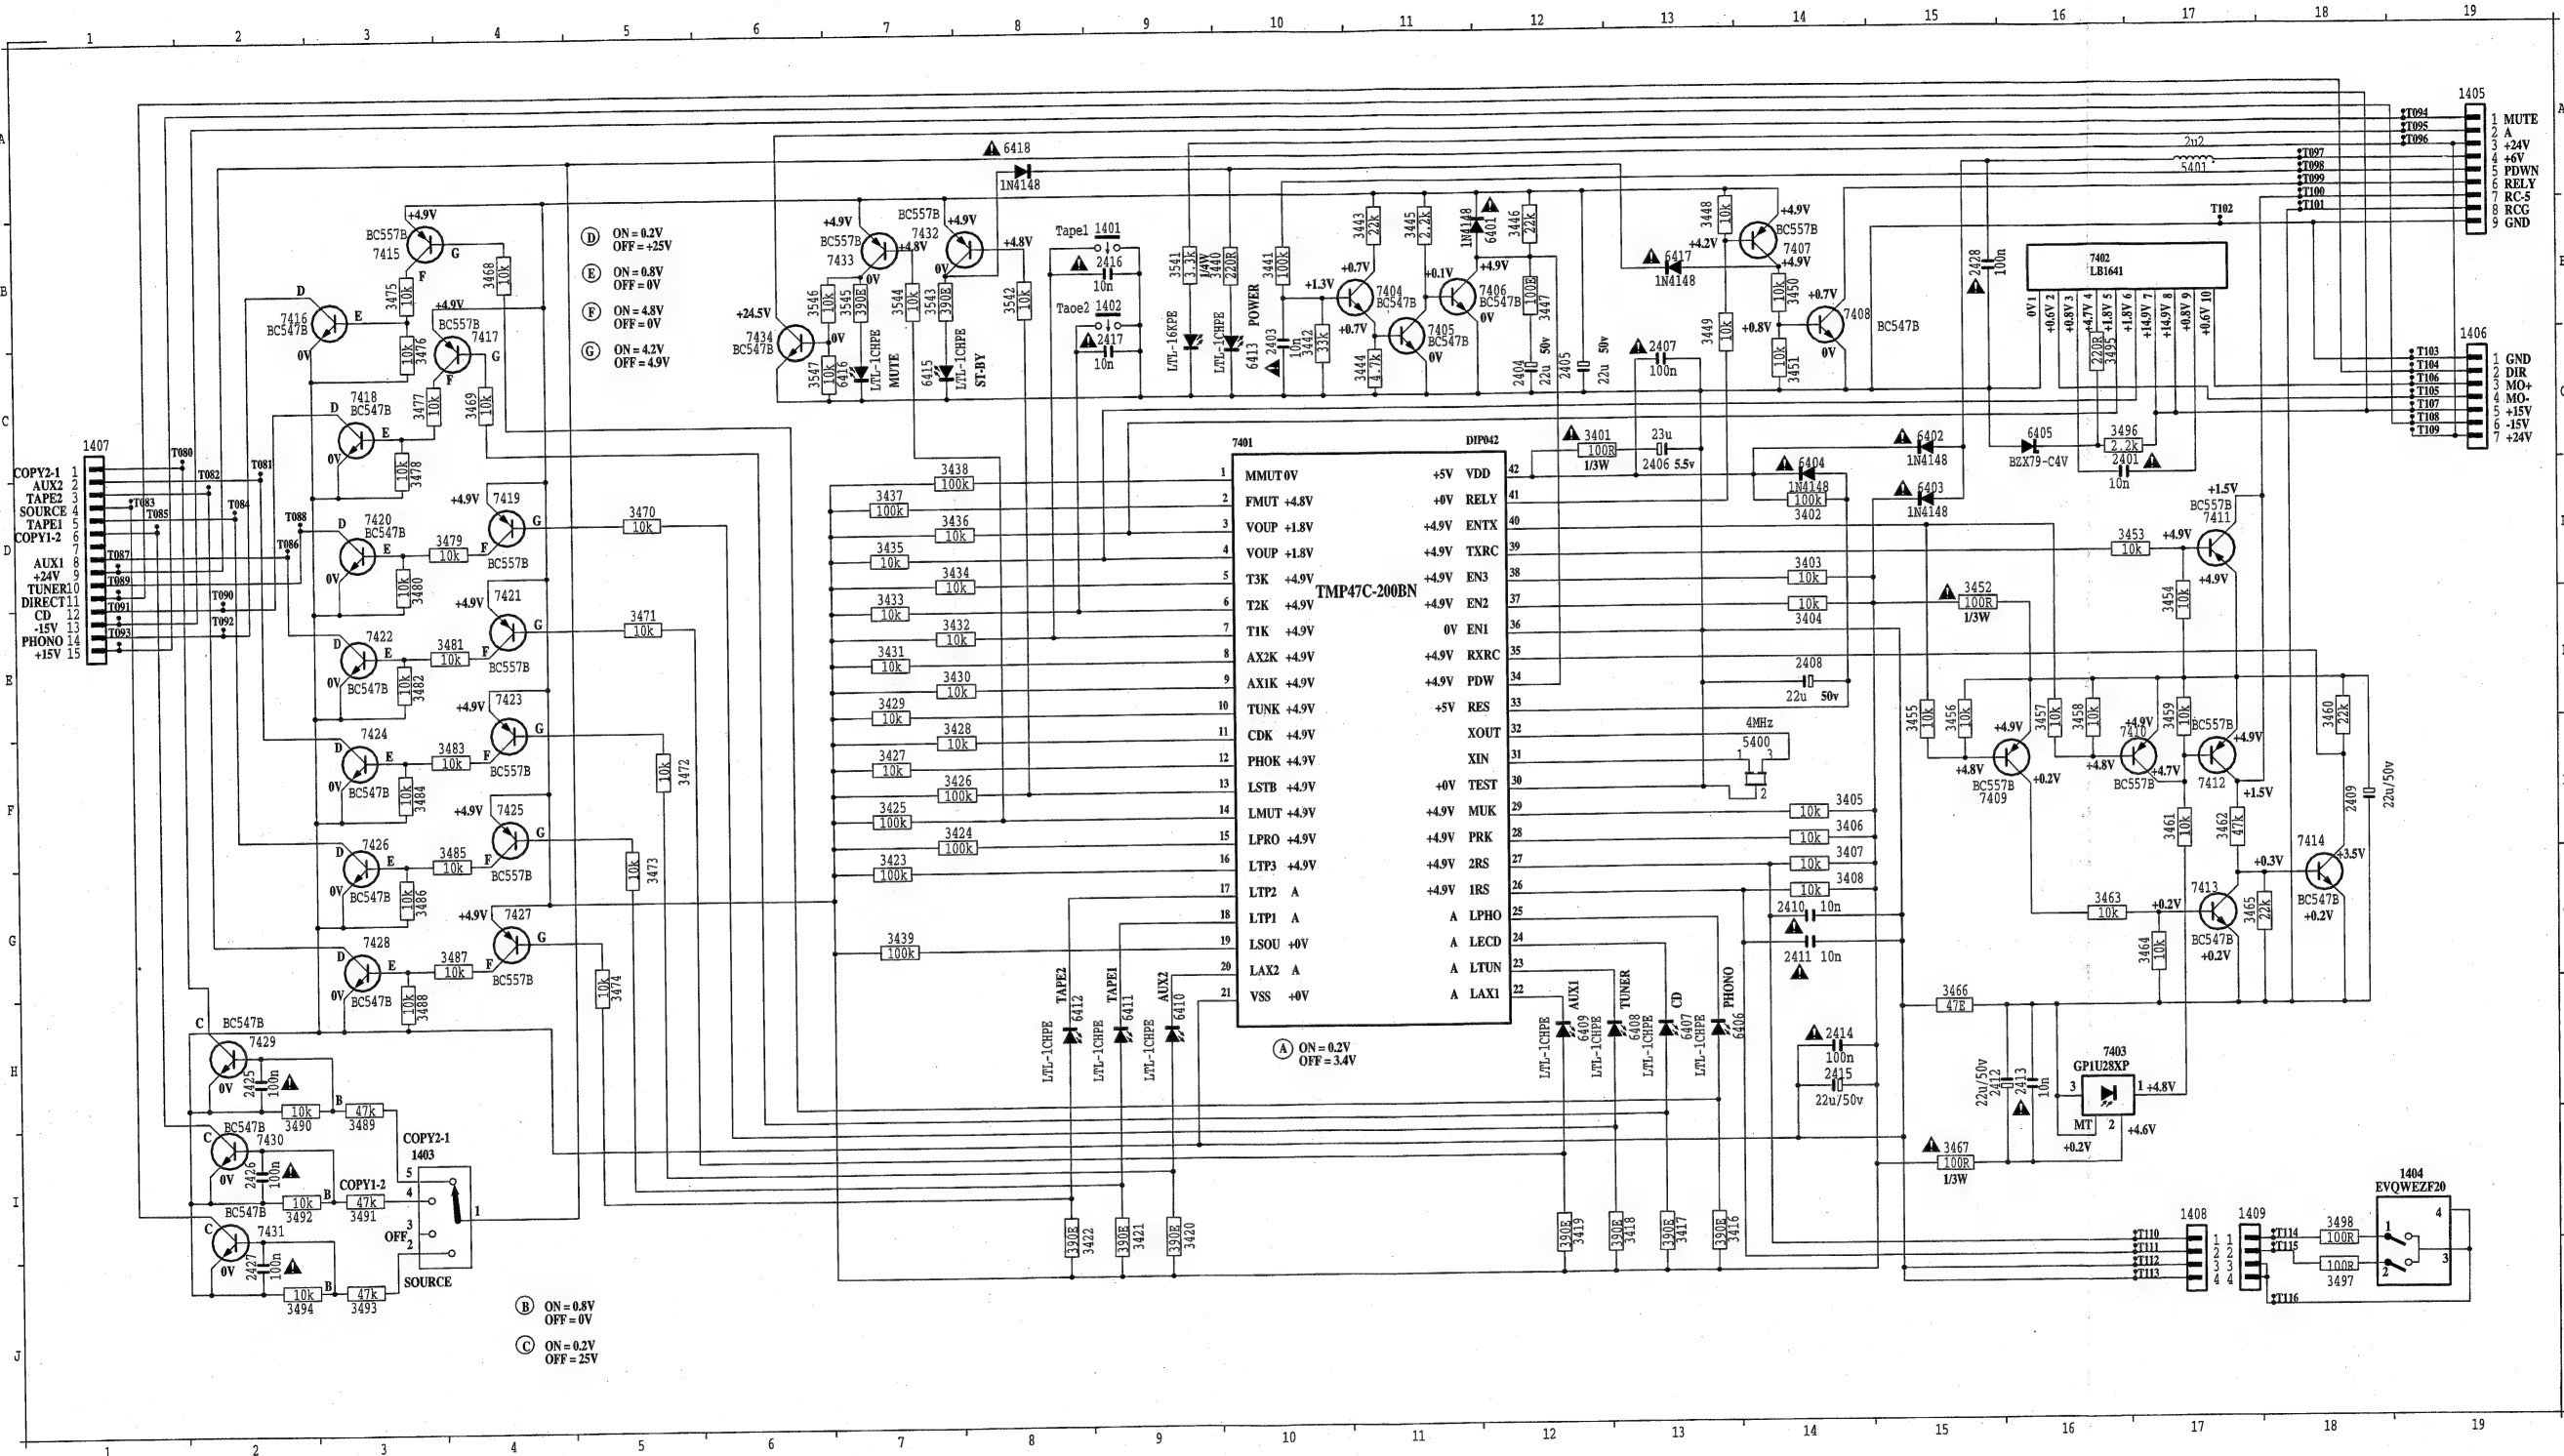


MAIN CIRCUIT (PM-68)

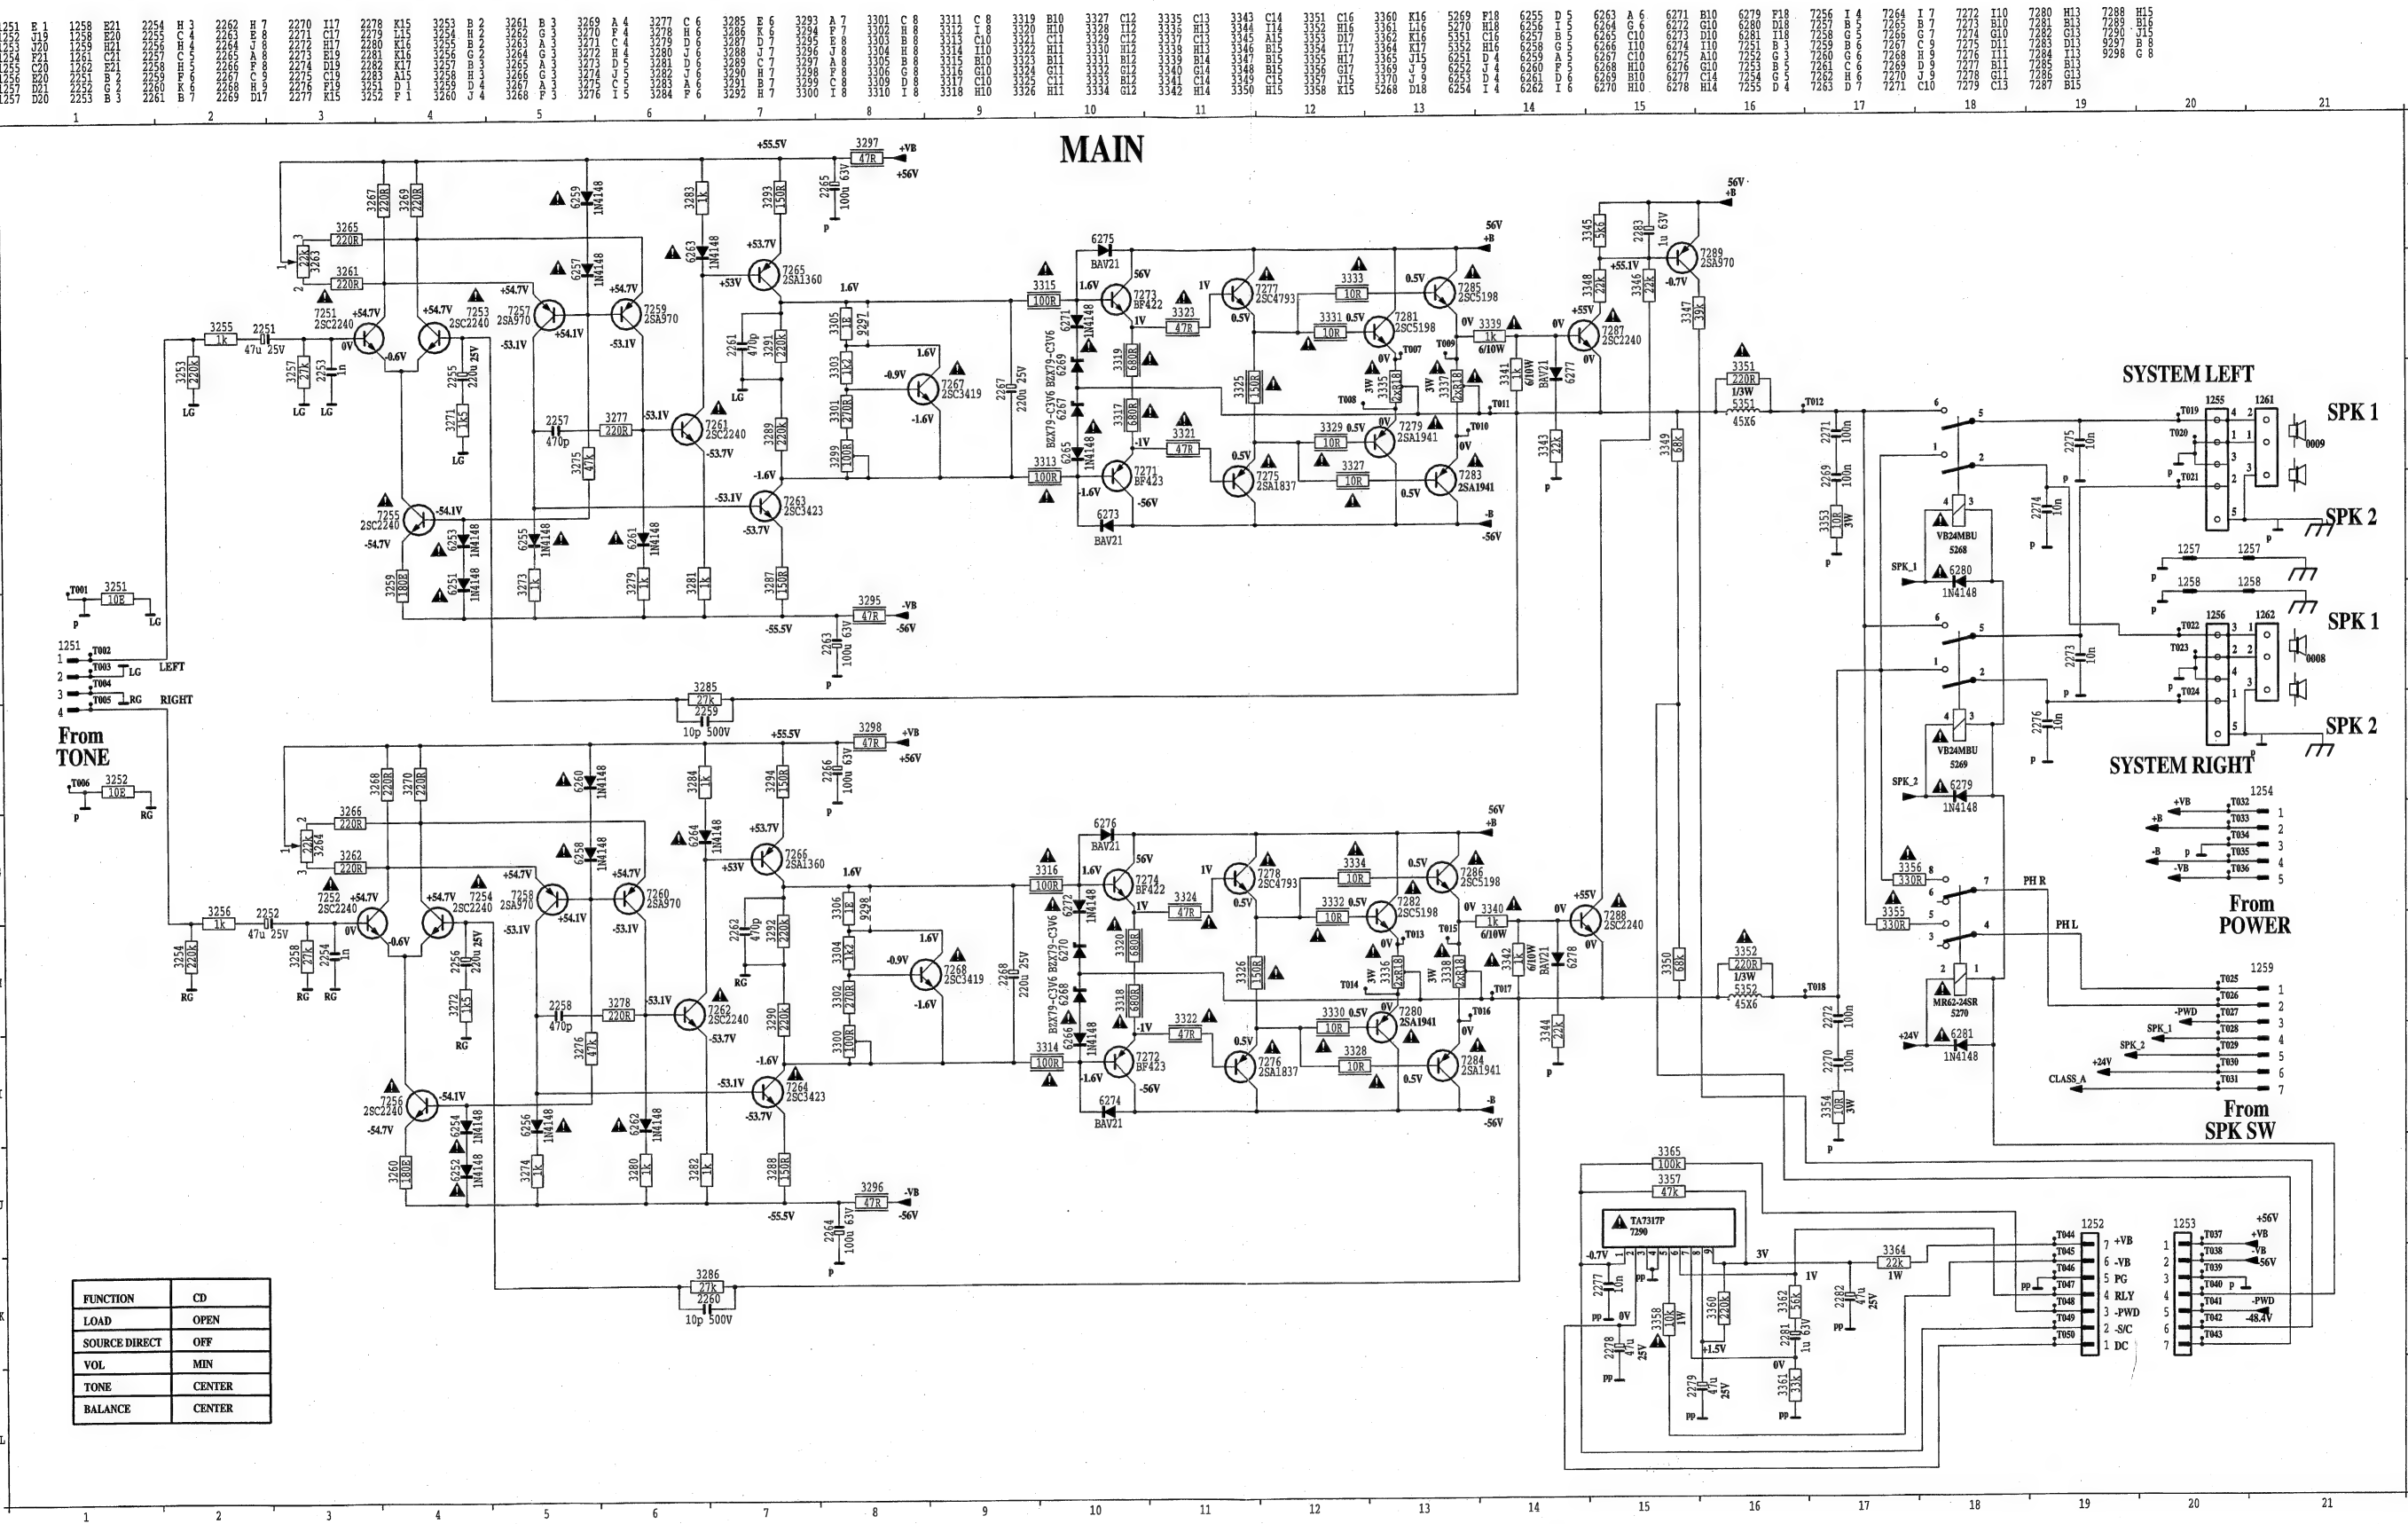




### MAIN CIRCUIT(PM-78)

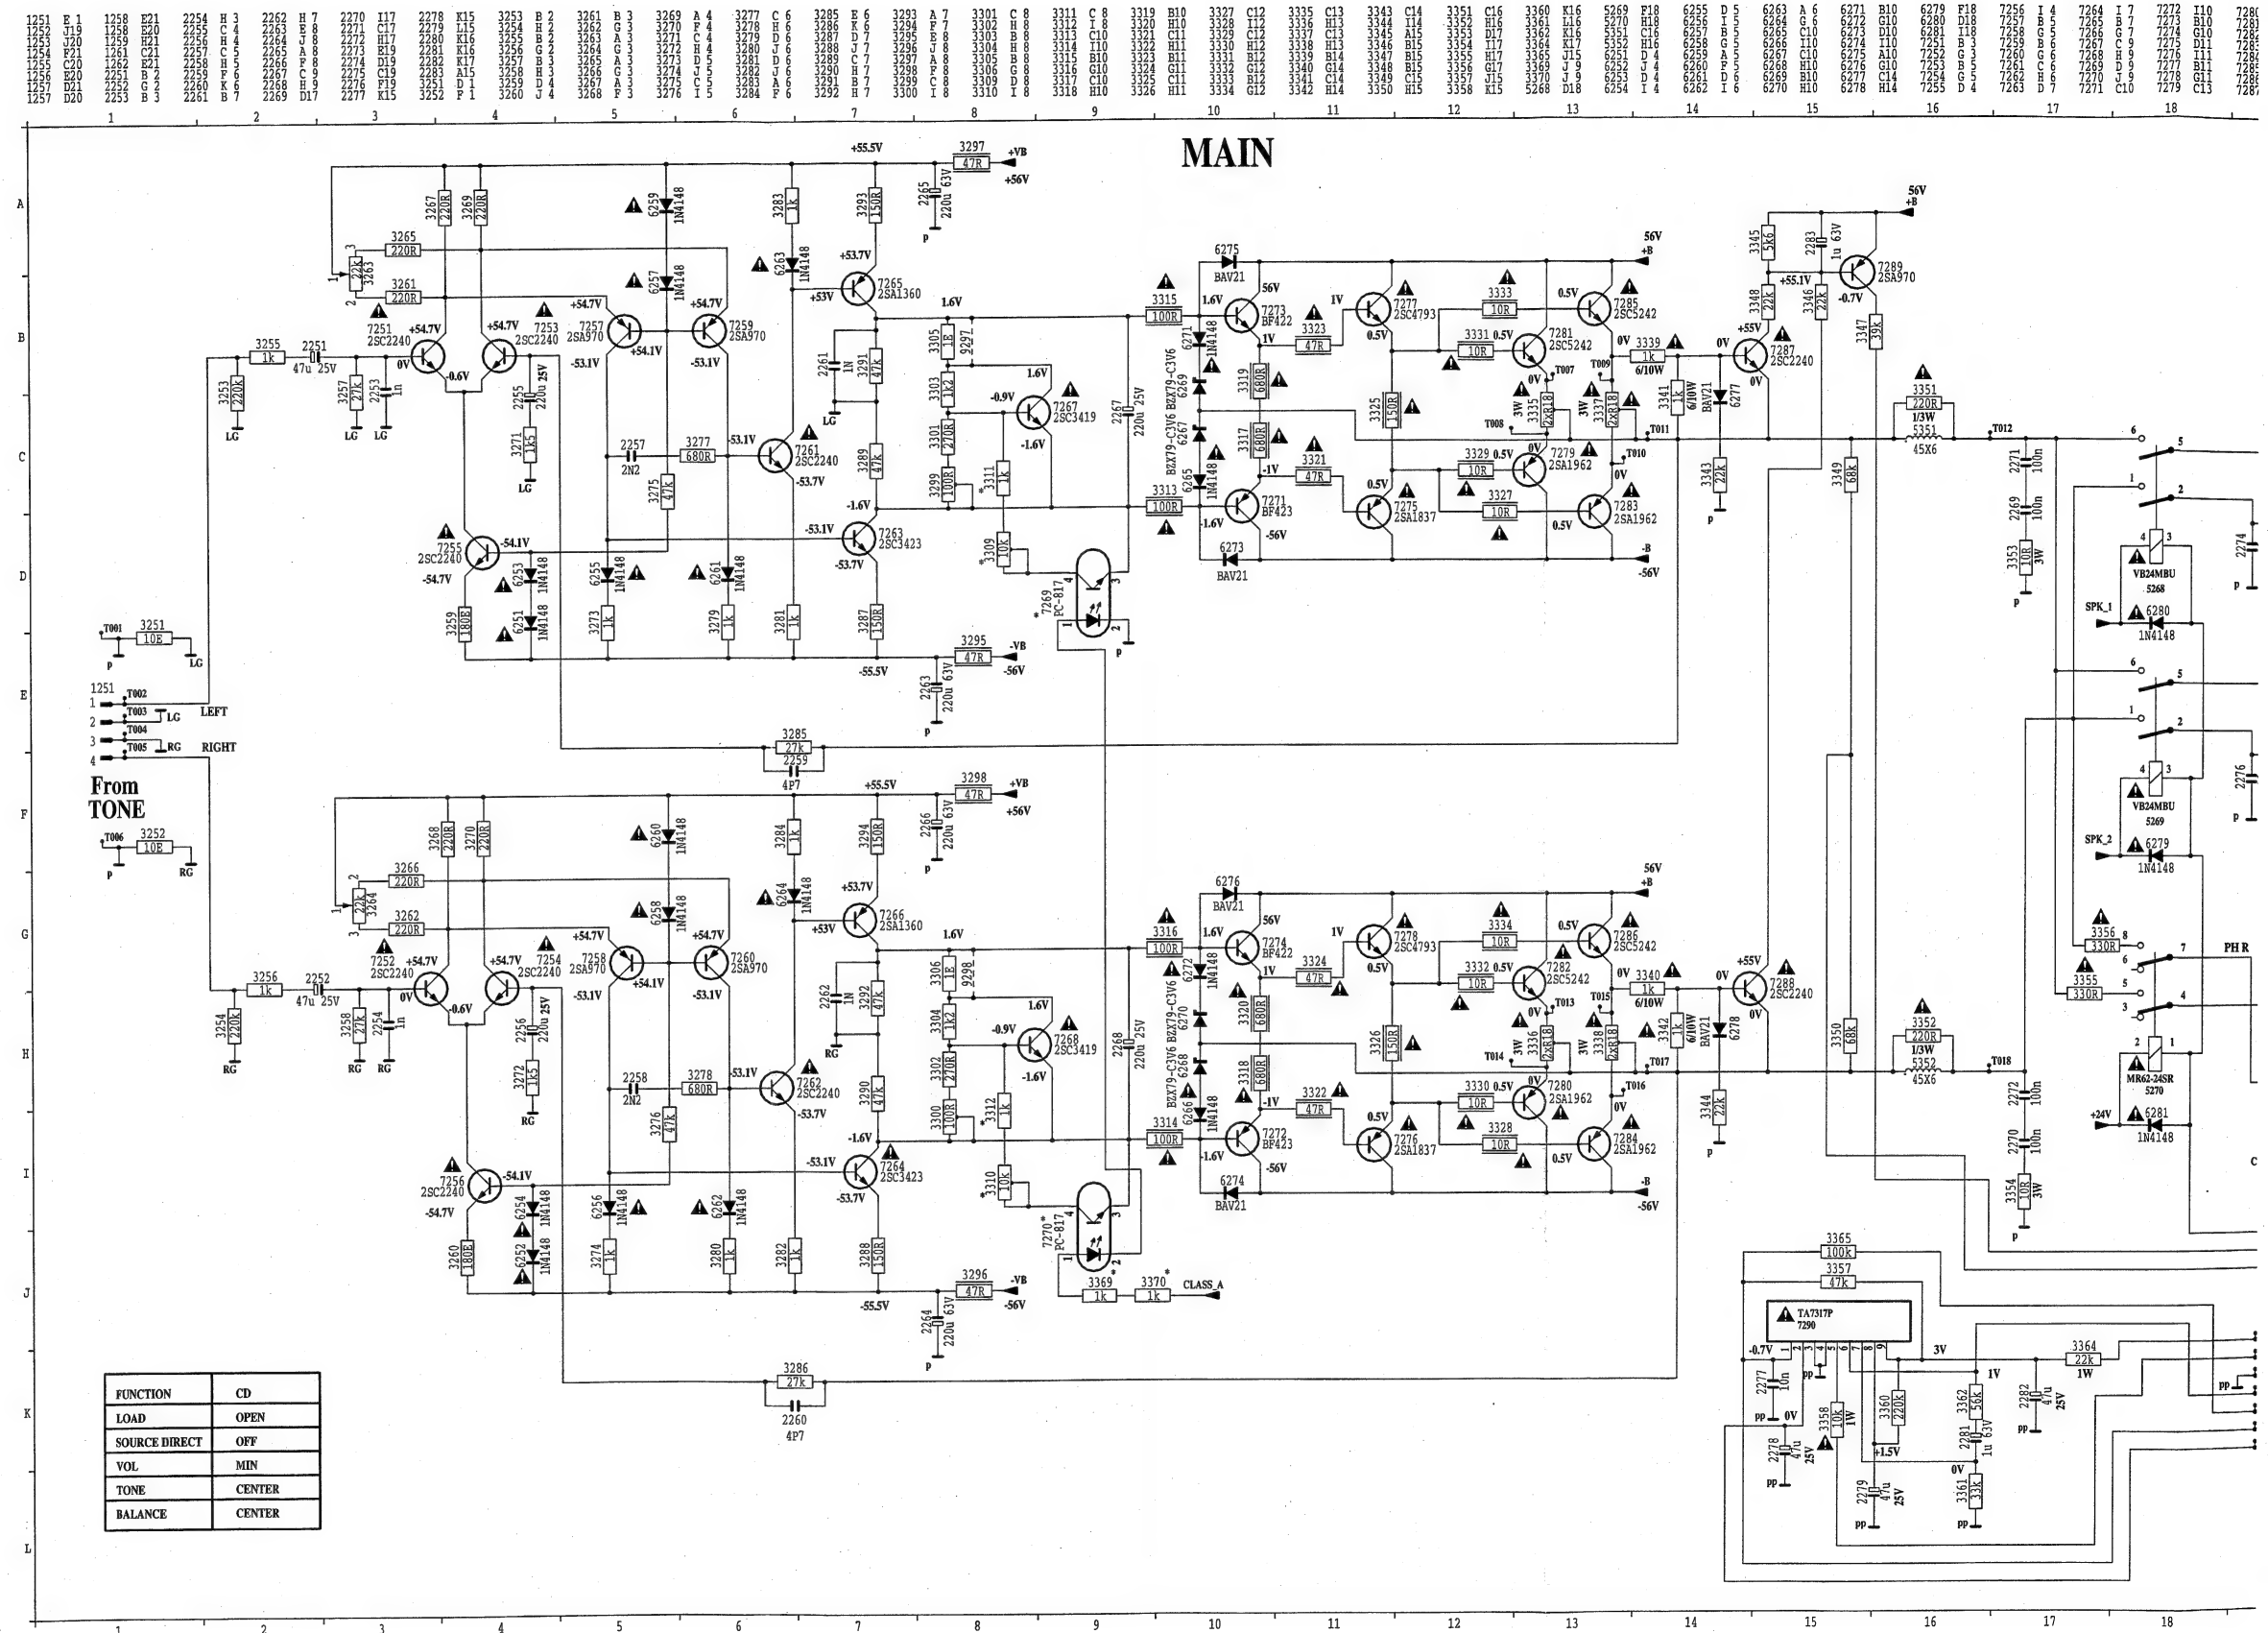










## CONTROL CIRCUIT II (PM-68)


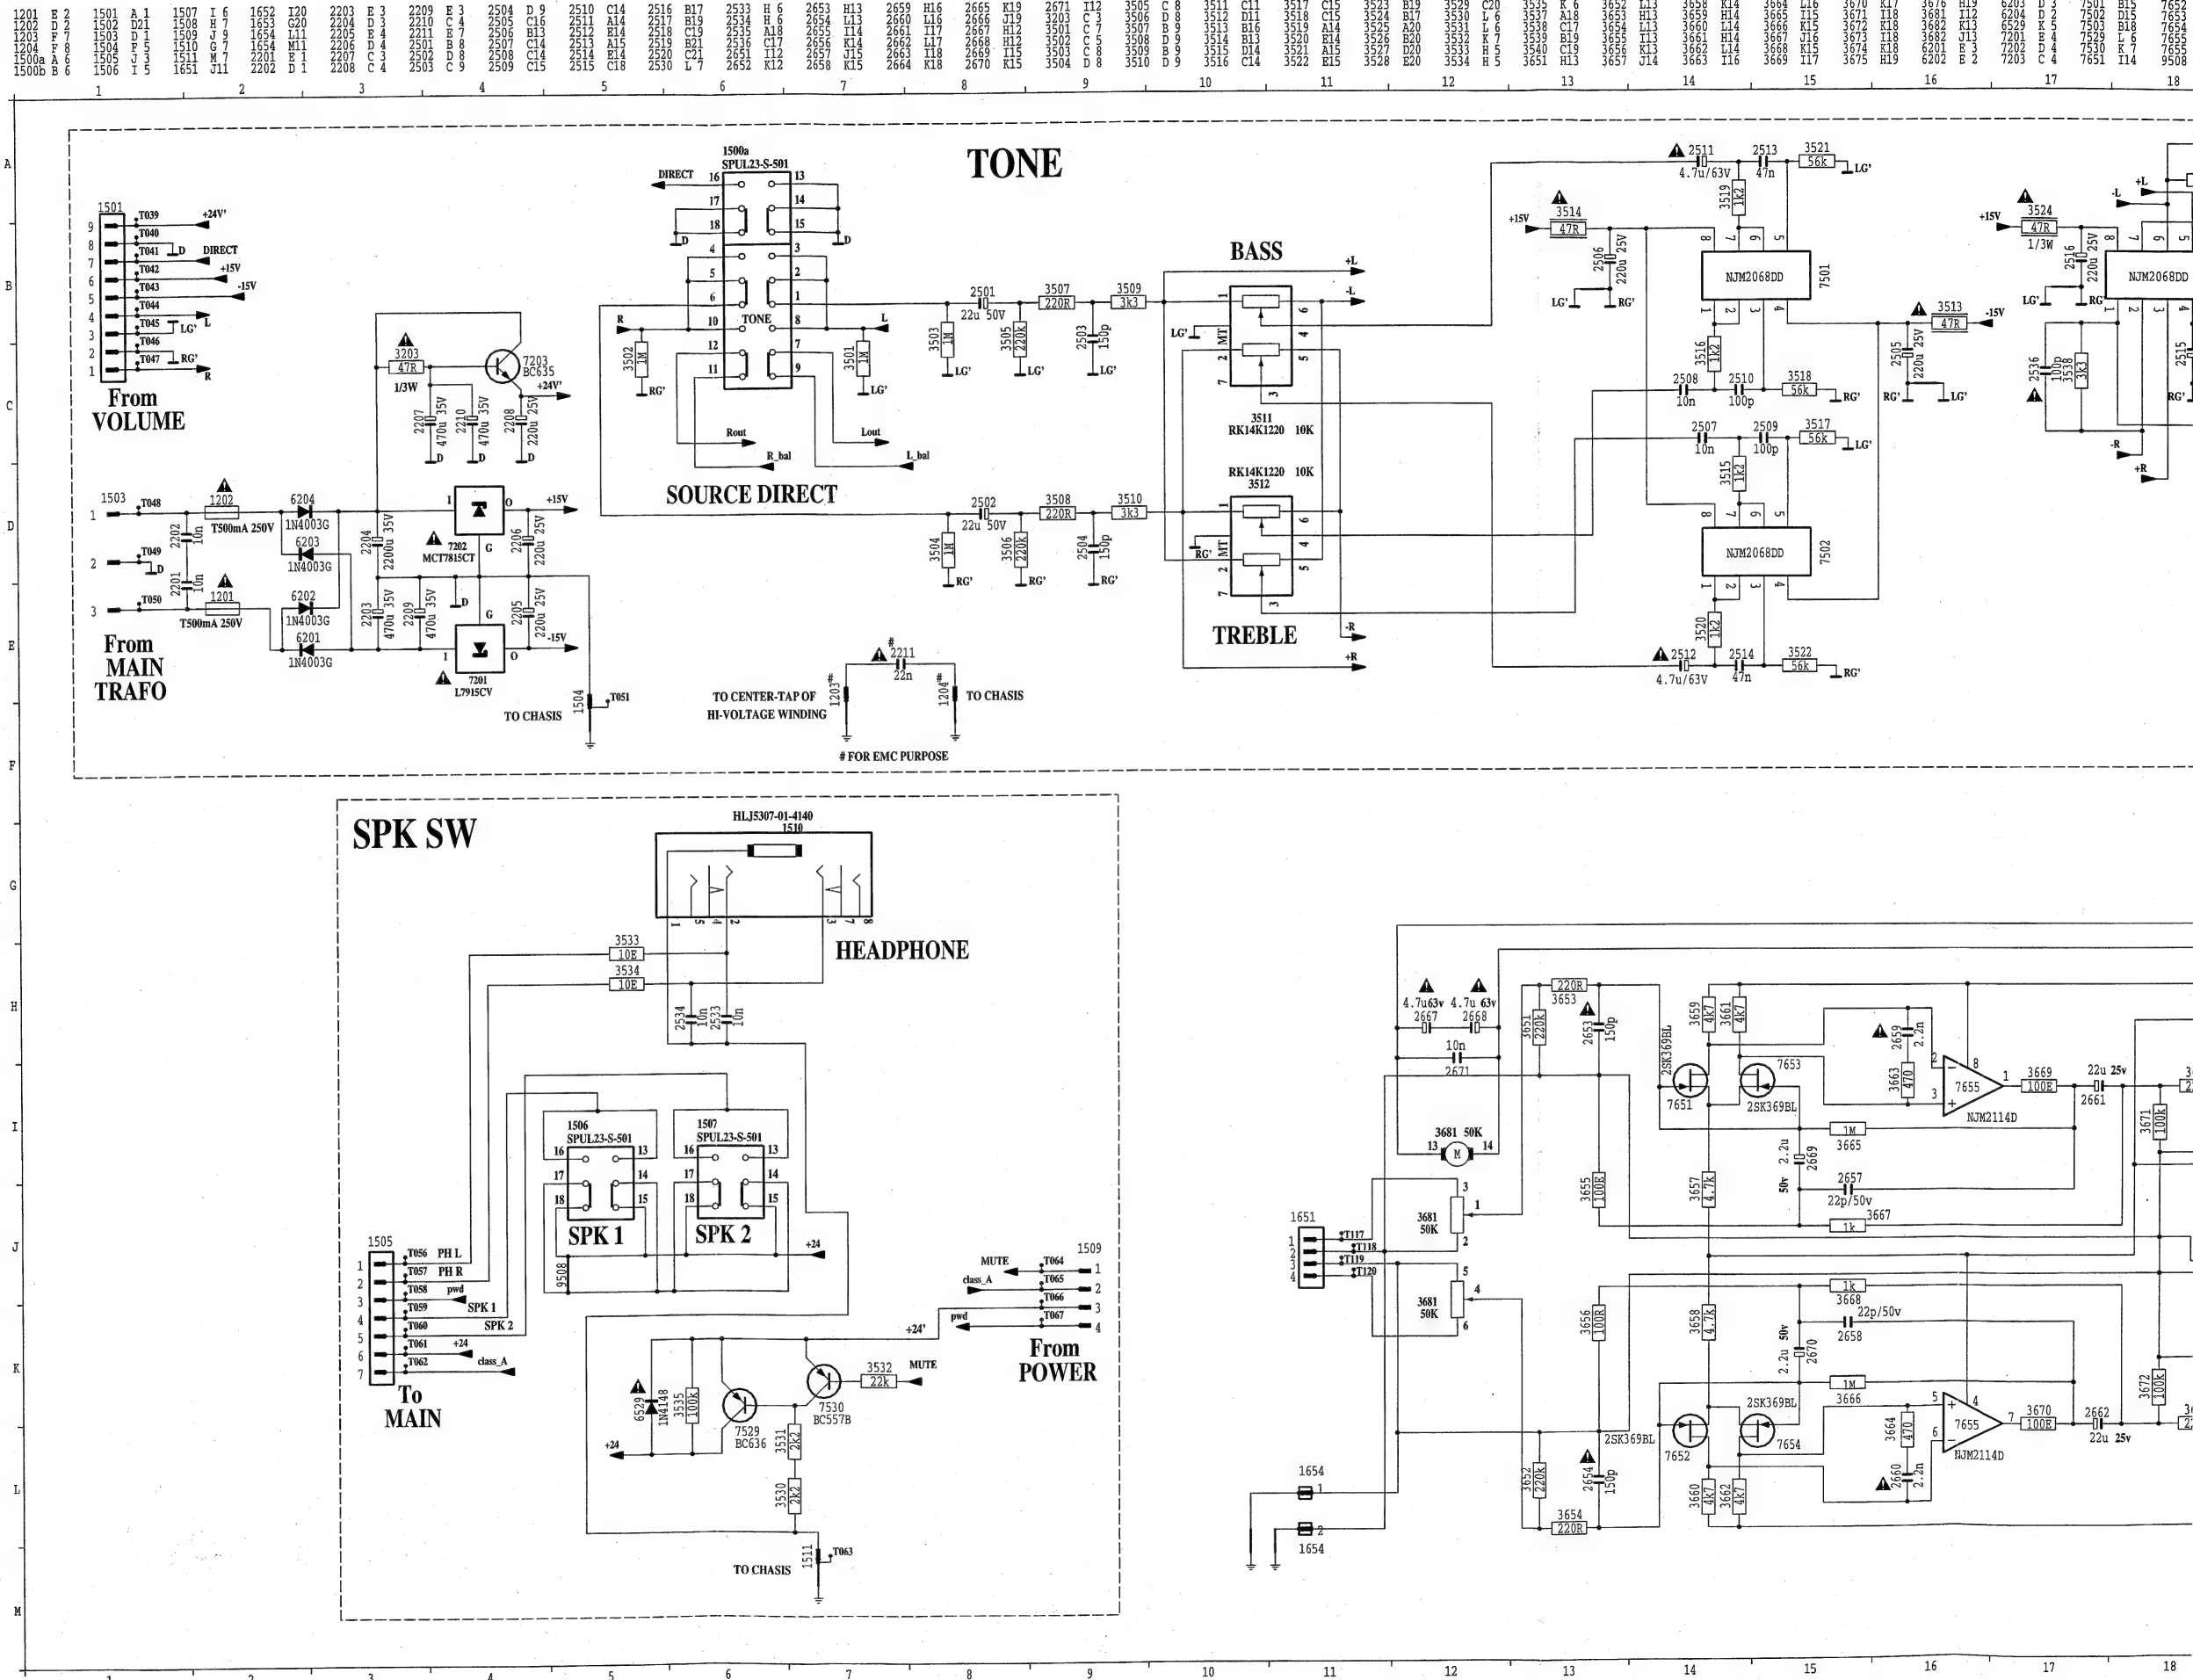


2516	B17	2533	H 6	2653	H13	2659	H16	2665	K19	2671	I12	3505	C 8	3511	C11	3517	C15	3523	B19	3529	C20	3535	F 6	3552	L13	3558	K14	3564	L16	3570	K17	3576	H19	6203	D 3	7501	B15	7652	L14
2517	B19	2534	H 6	2654	L13	2660	L16	2666	J18	2672	I12	3506	D 8	3512	D11	3518	C15	3524	B17	3530	L 6	3536	F 6	3553	H13	3559	K14	3565	L16	3571	H18	6204	D 3	7502	D15	7653	L15		
2518	C19	2535	A18	2655	L14	2661	I17	2667	H12	2673	C 3	3507	D 9	3513	B16	3519	A14	3525	A20	3531	L 6	3537	F 6	3554	H13	3560	L14	3566	K15	3572	K18	6205	K 5	7503	B18	7654	L15		
2519	B21	2536	C17	2656	J14	2662	L17	2668	H12	2674	C 5	3508	D 9	3514	B13	3520	E14	3526	B20	3532	K 7	3538	F19	3555	T13	3561	H14	3567	J16	6206	B 3	7504	K 5	7655	L16				
2520	C21	2537	I12	2657	J15	2663	I18	2669	I15	2675	D 8	3509	D 9	3515	D14	3521	A15	3527	D20	3533	H 5	3539	C19	3556	K13	3562	L14	3568	K15	3573	H18	6207	C 3	7505	L 6	7655	L16		
2530	L 7	2652	K12	2658	K15	2664	K18	2670	K15	3504	D 8	3510	D 9	3516	C14	3522	B15	3528	E20	3534	H 5	3540	C19	3557	J14	3563	L16	3569	H17	6208	B 2	7506	L14	7657	L16				
6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21									

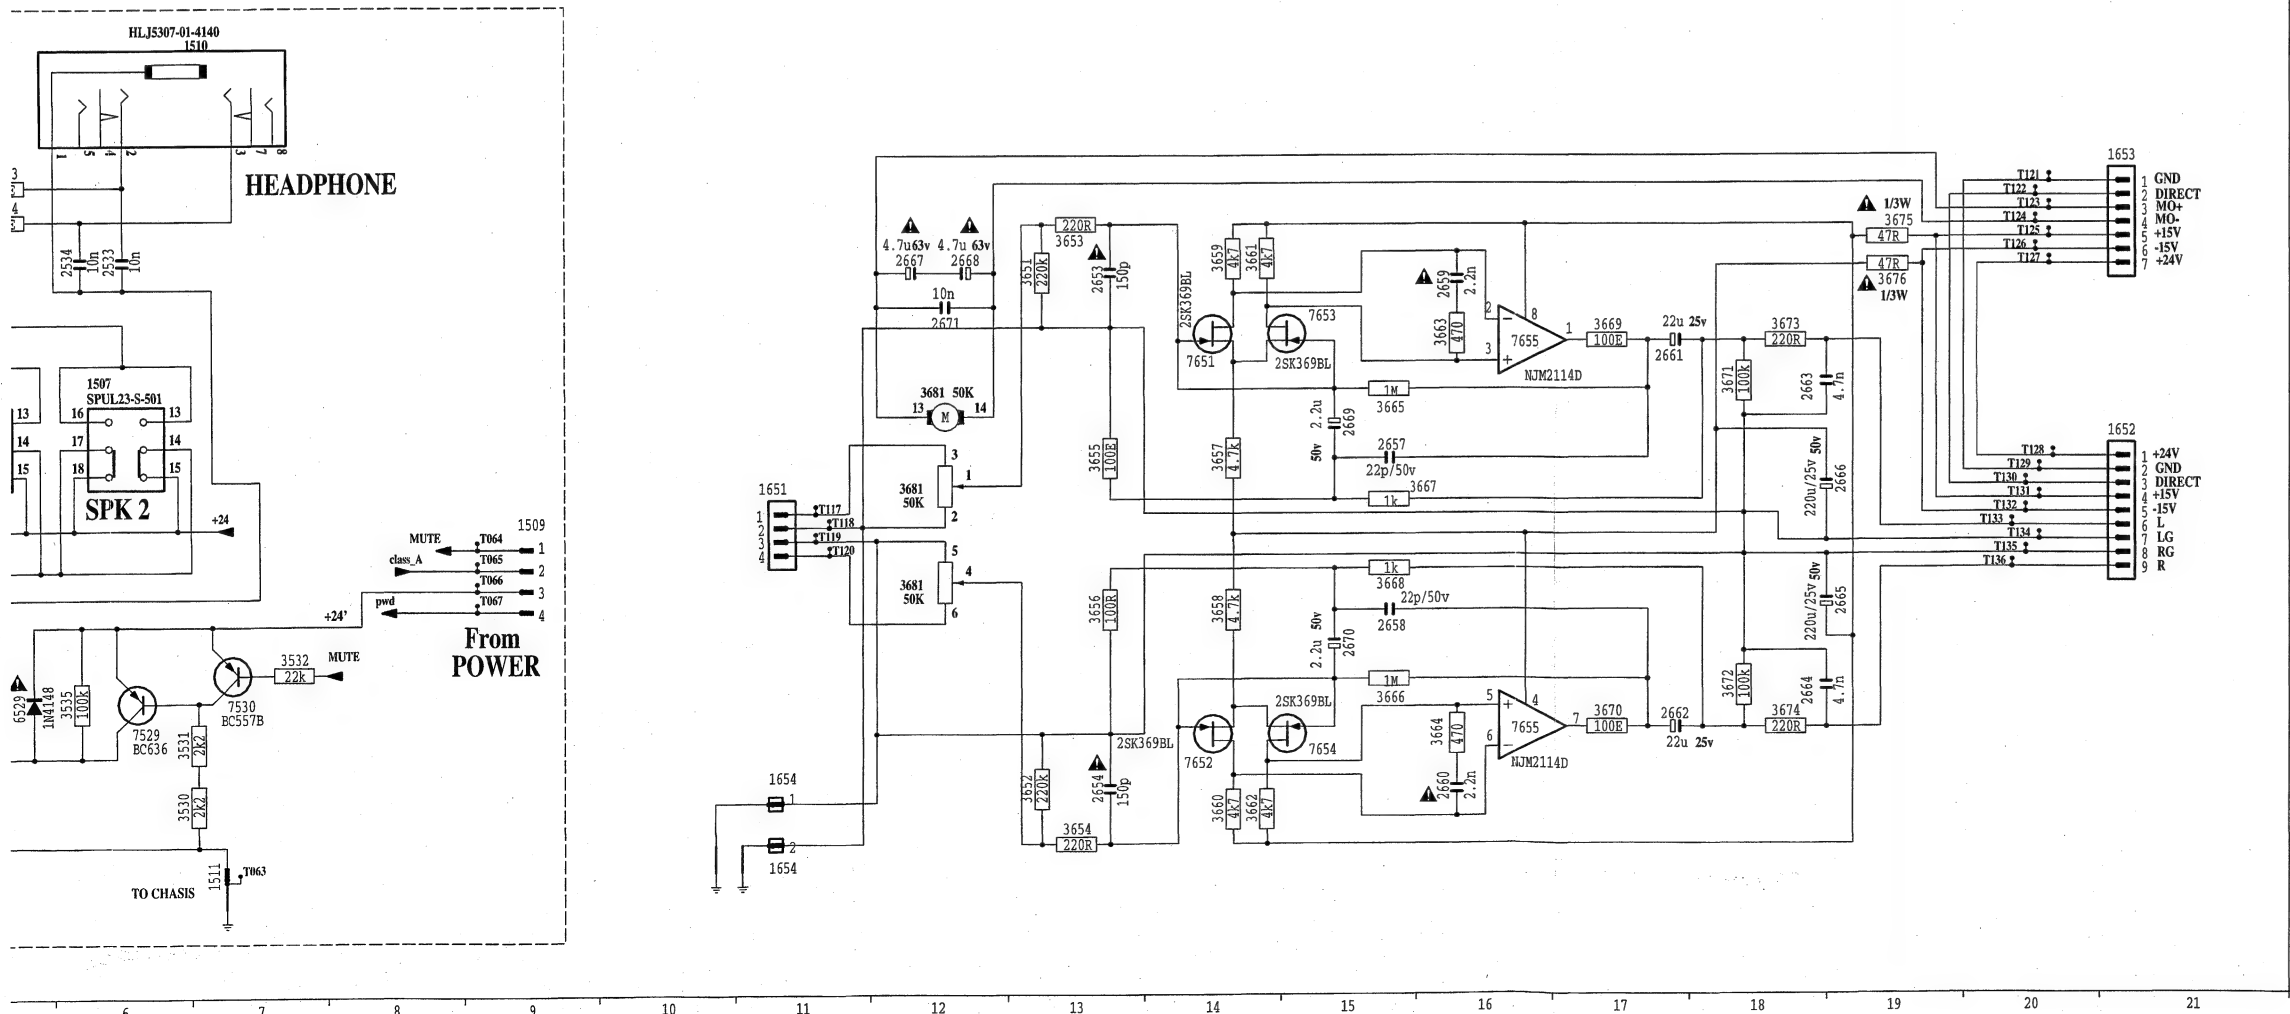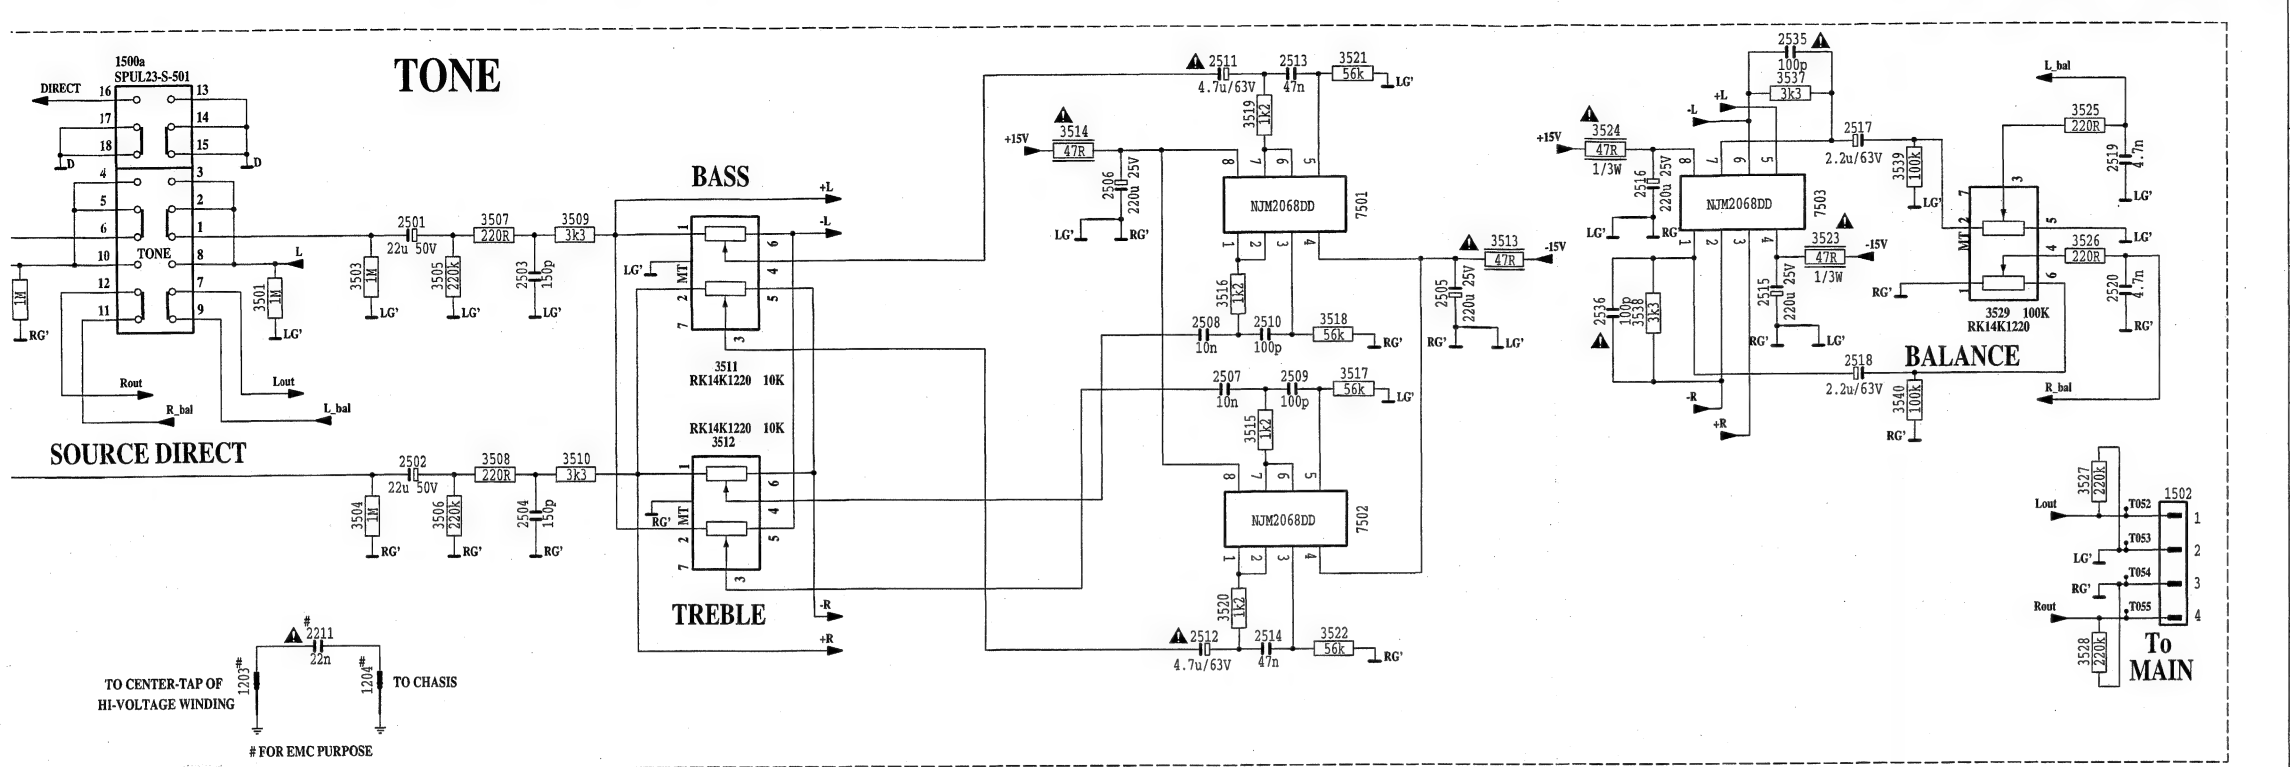

## CONTROL CIRCUIT II (PM-78)

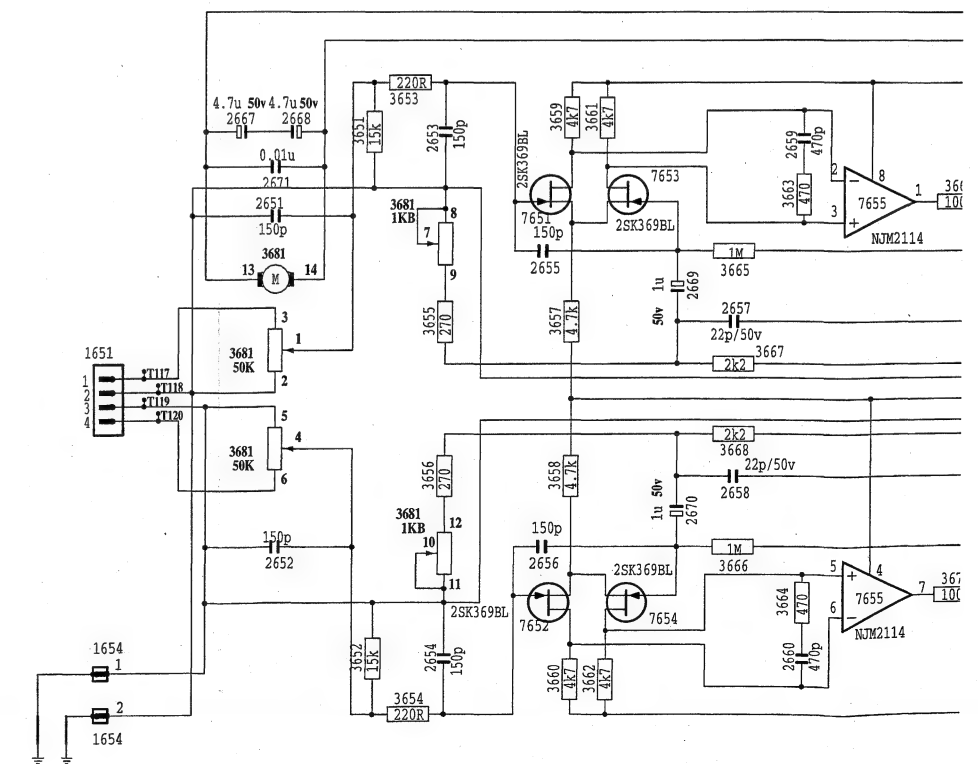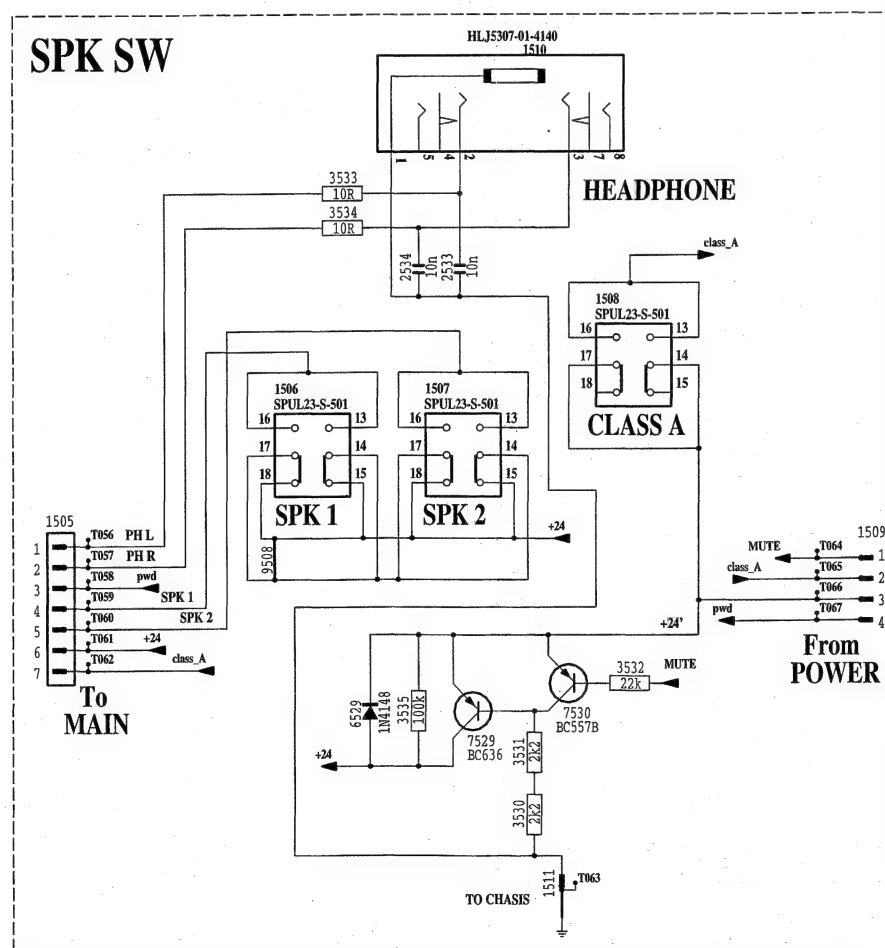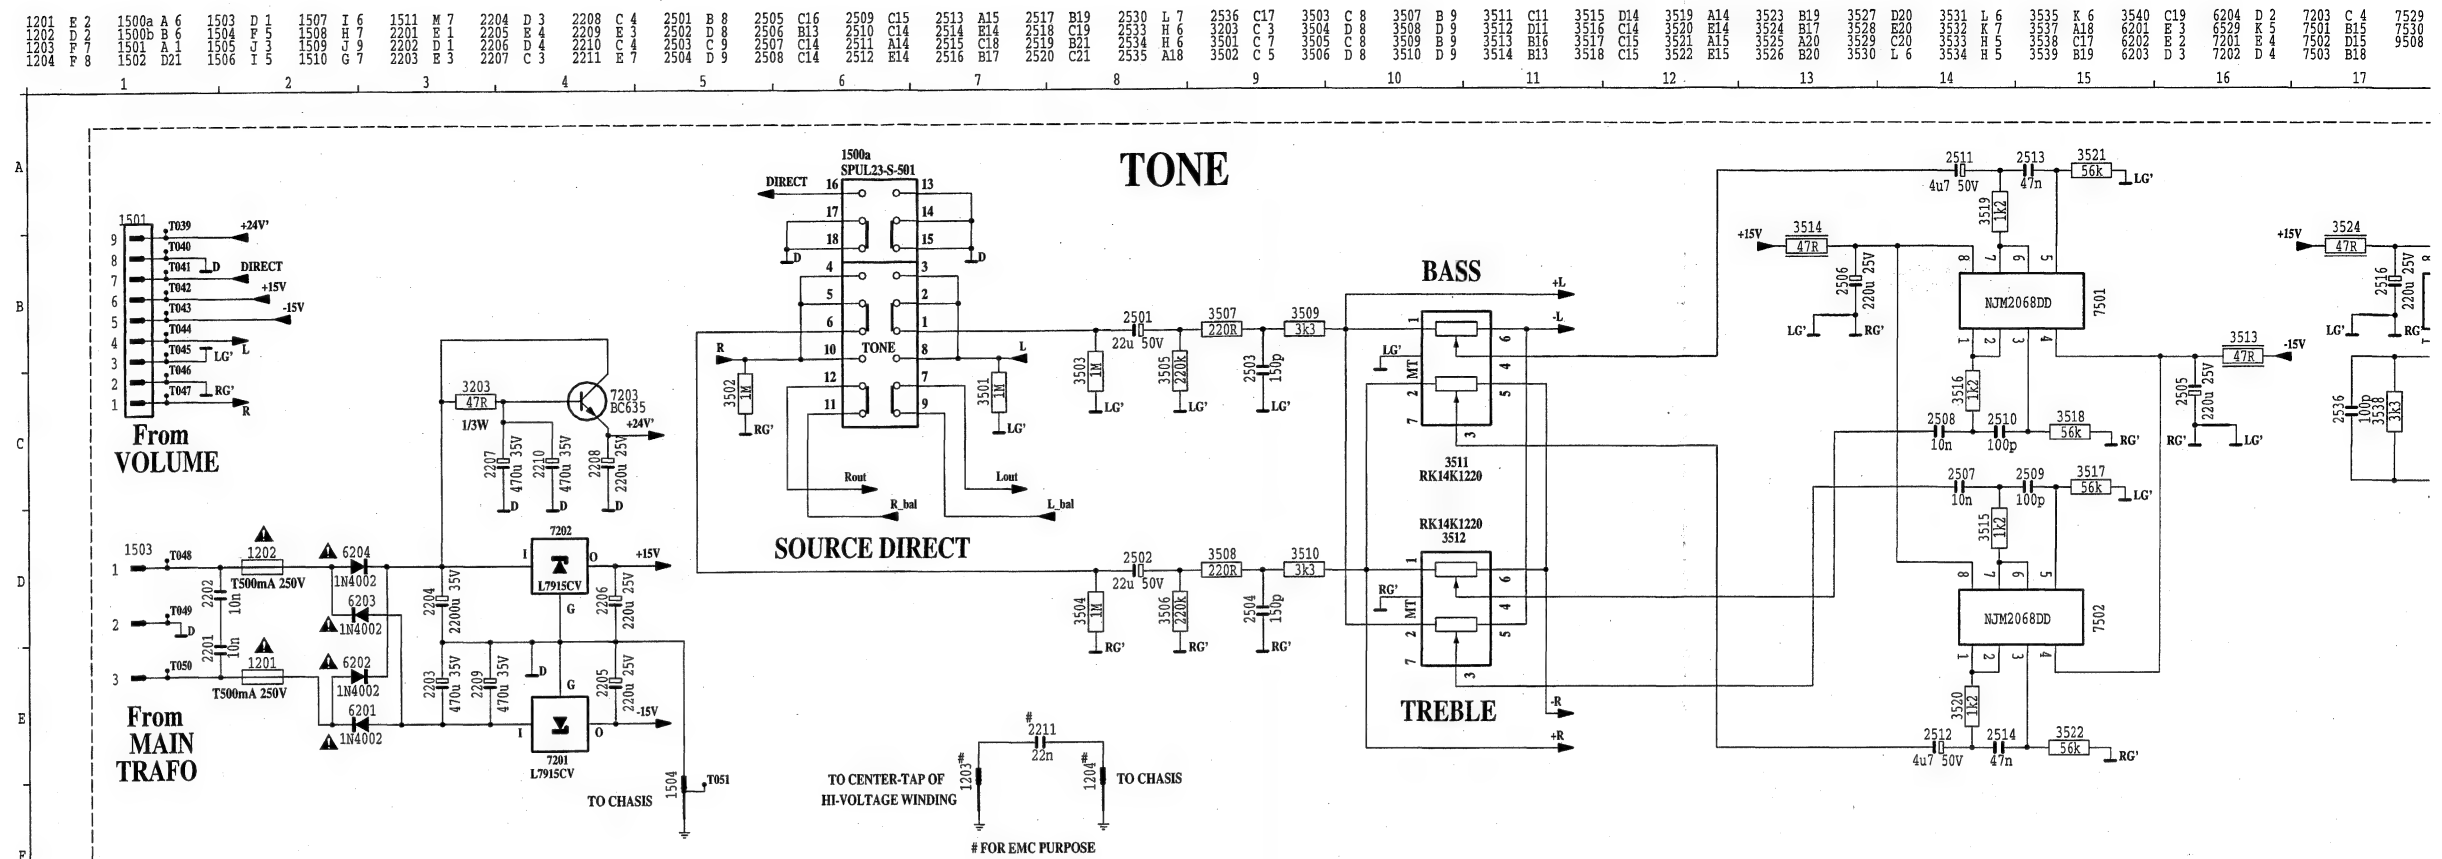

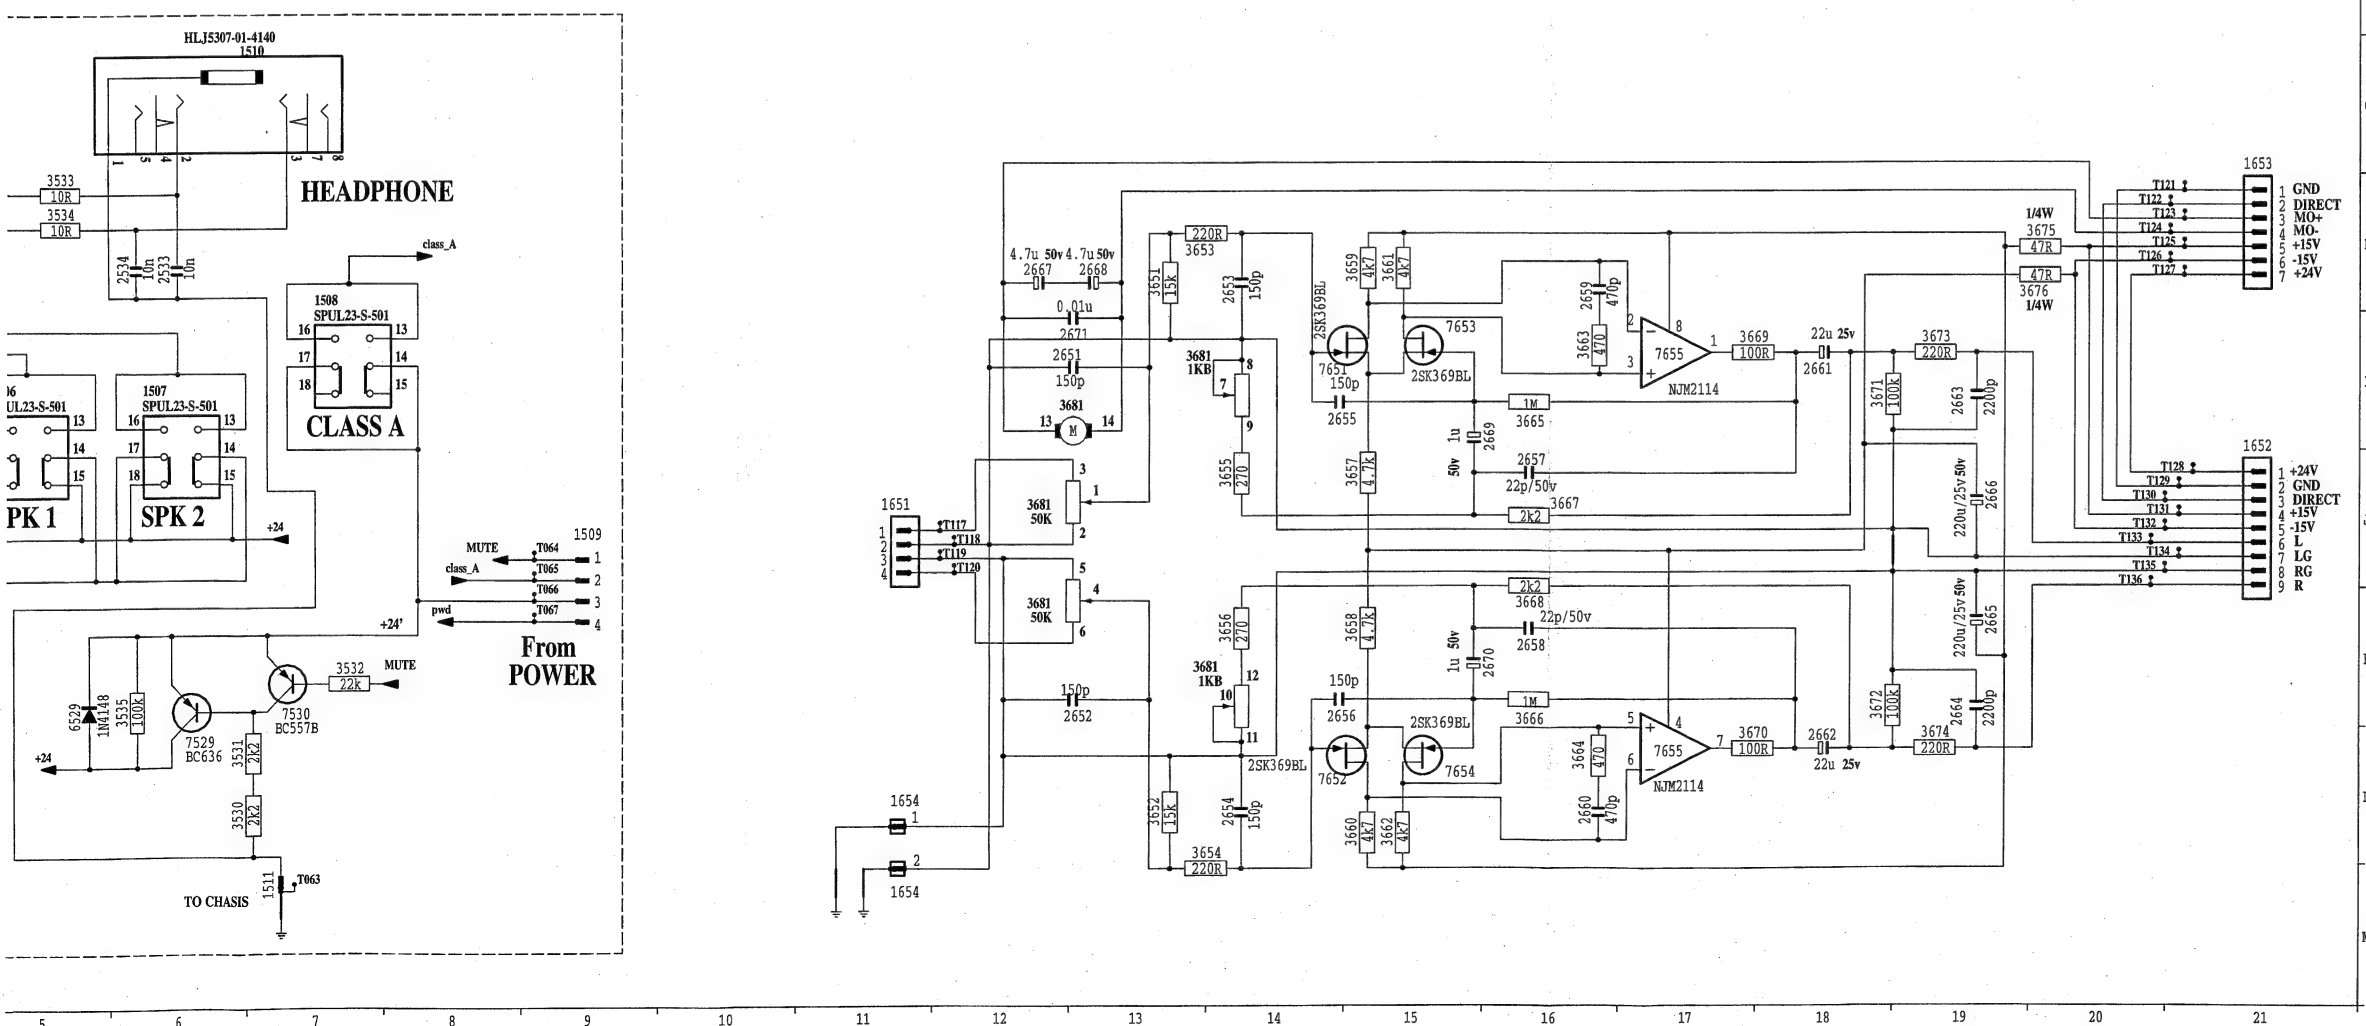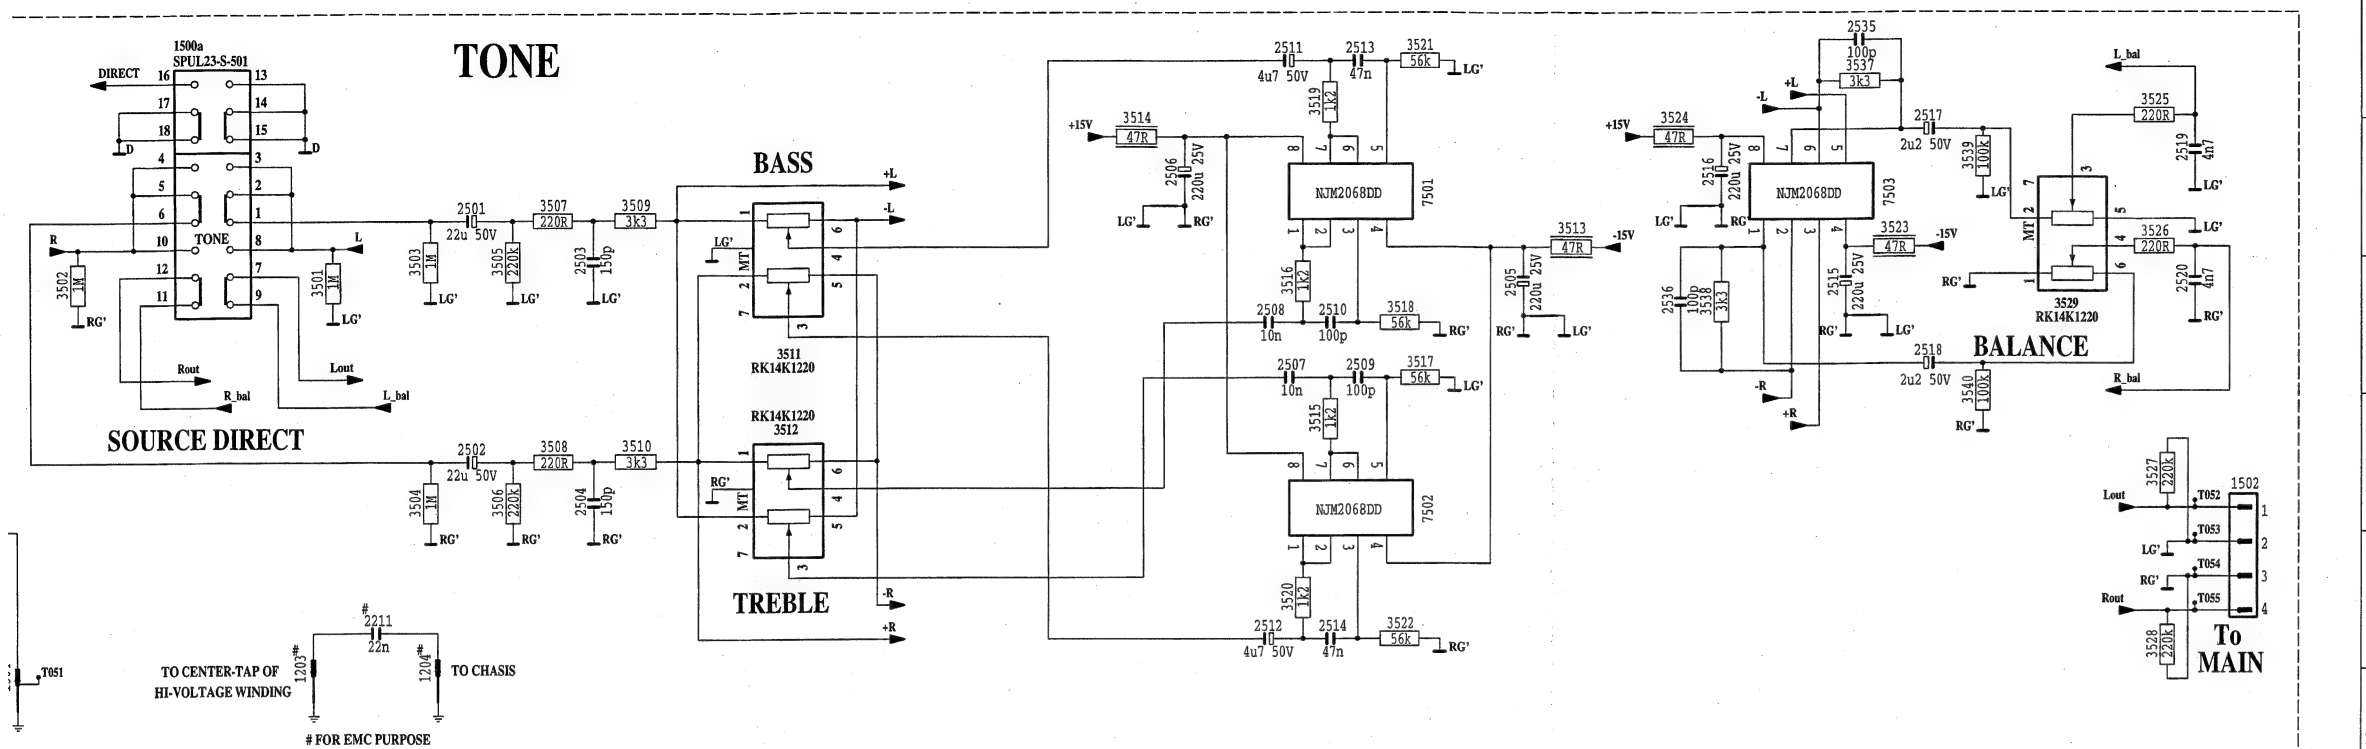




CS 98 245  
/ Druck 19








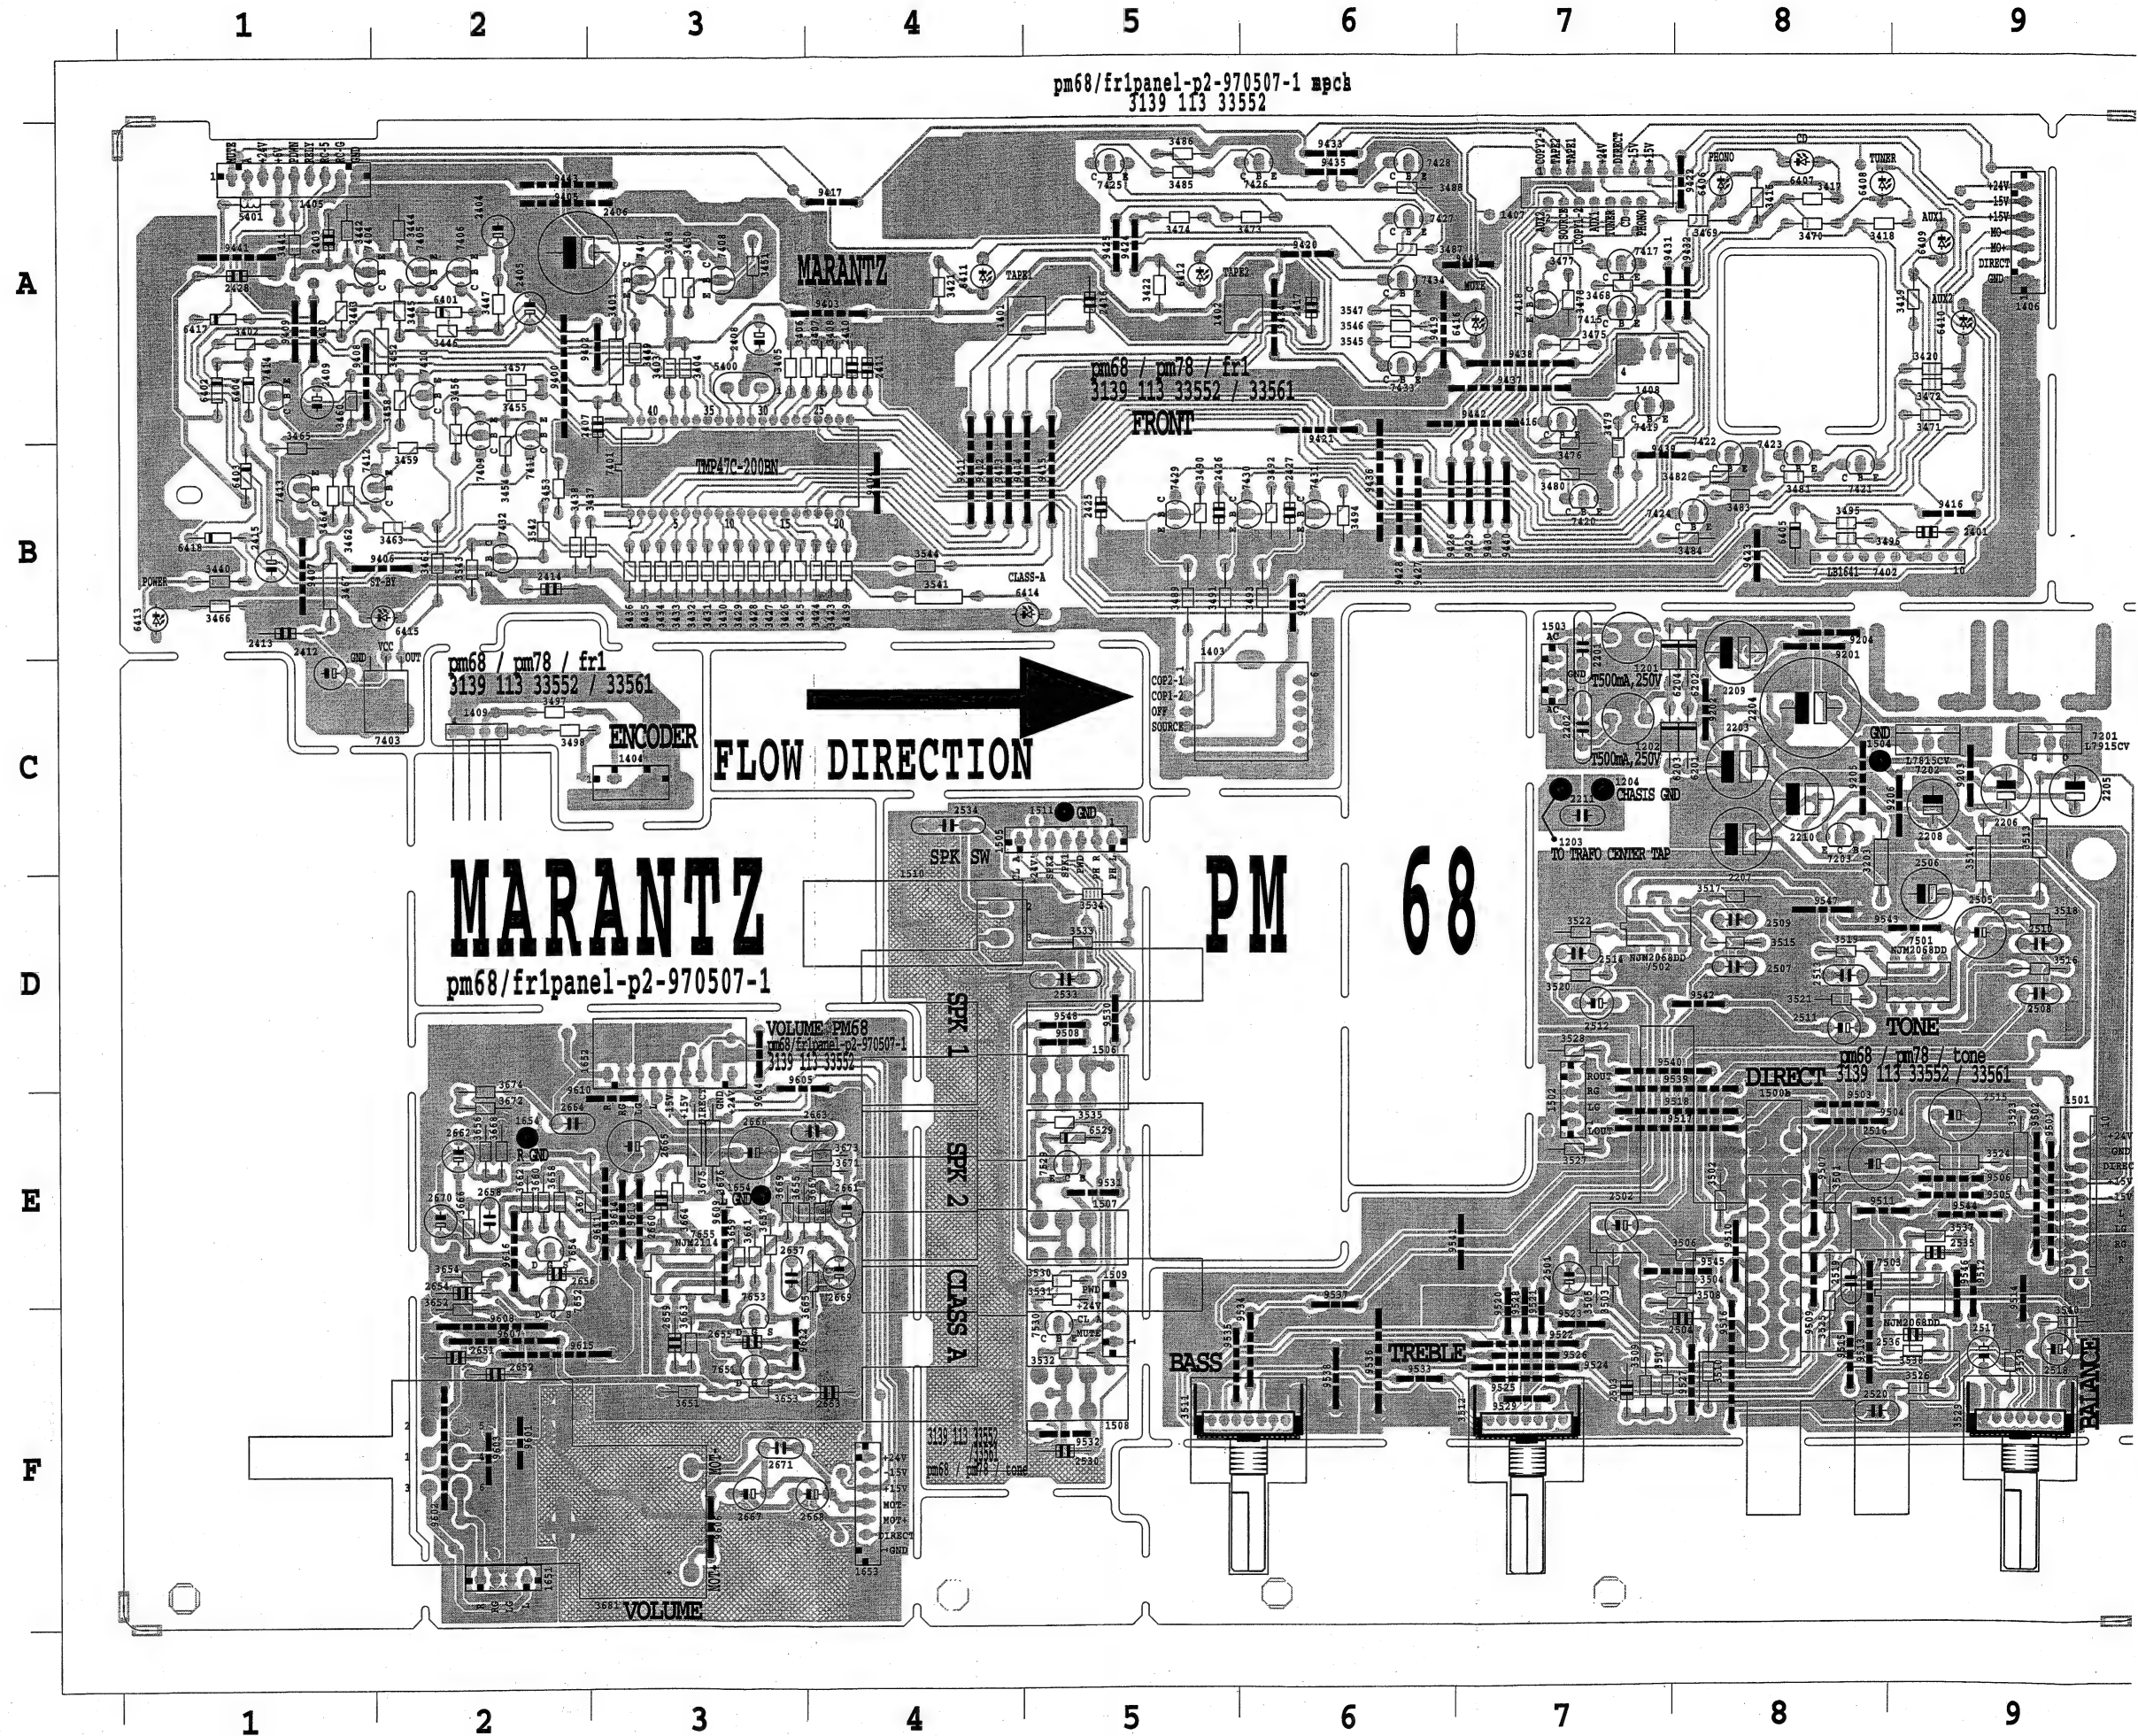



3 4 5 6 7 8 9

pm68/fr1panel-p2-970507-1 mpch  
3139 113 33552

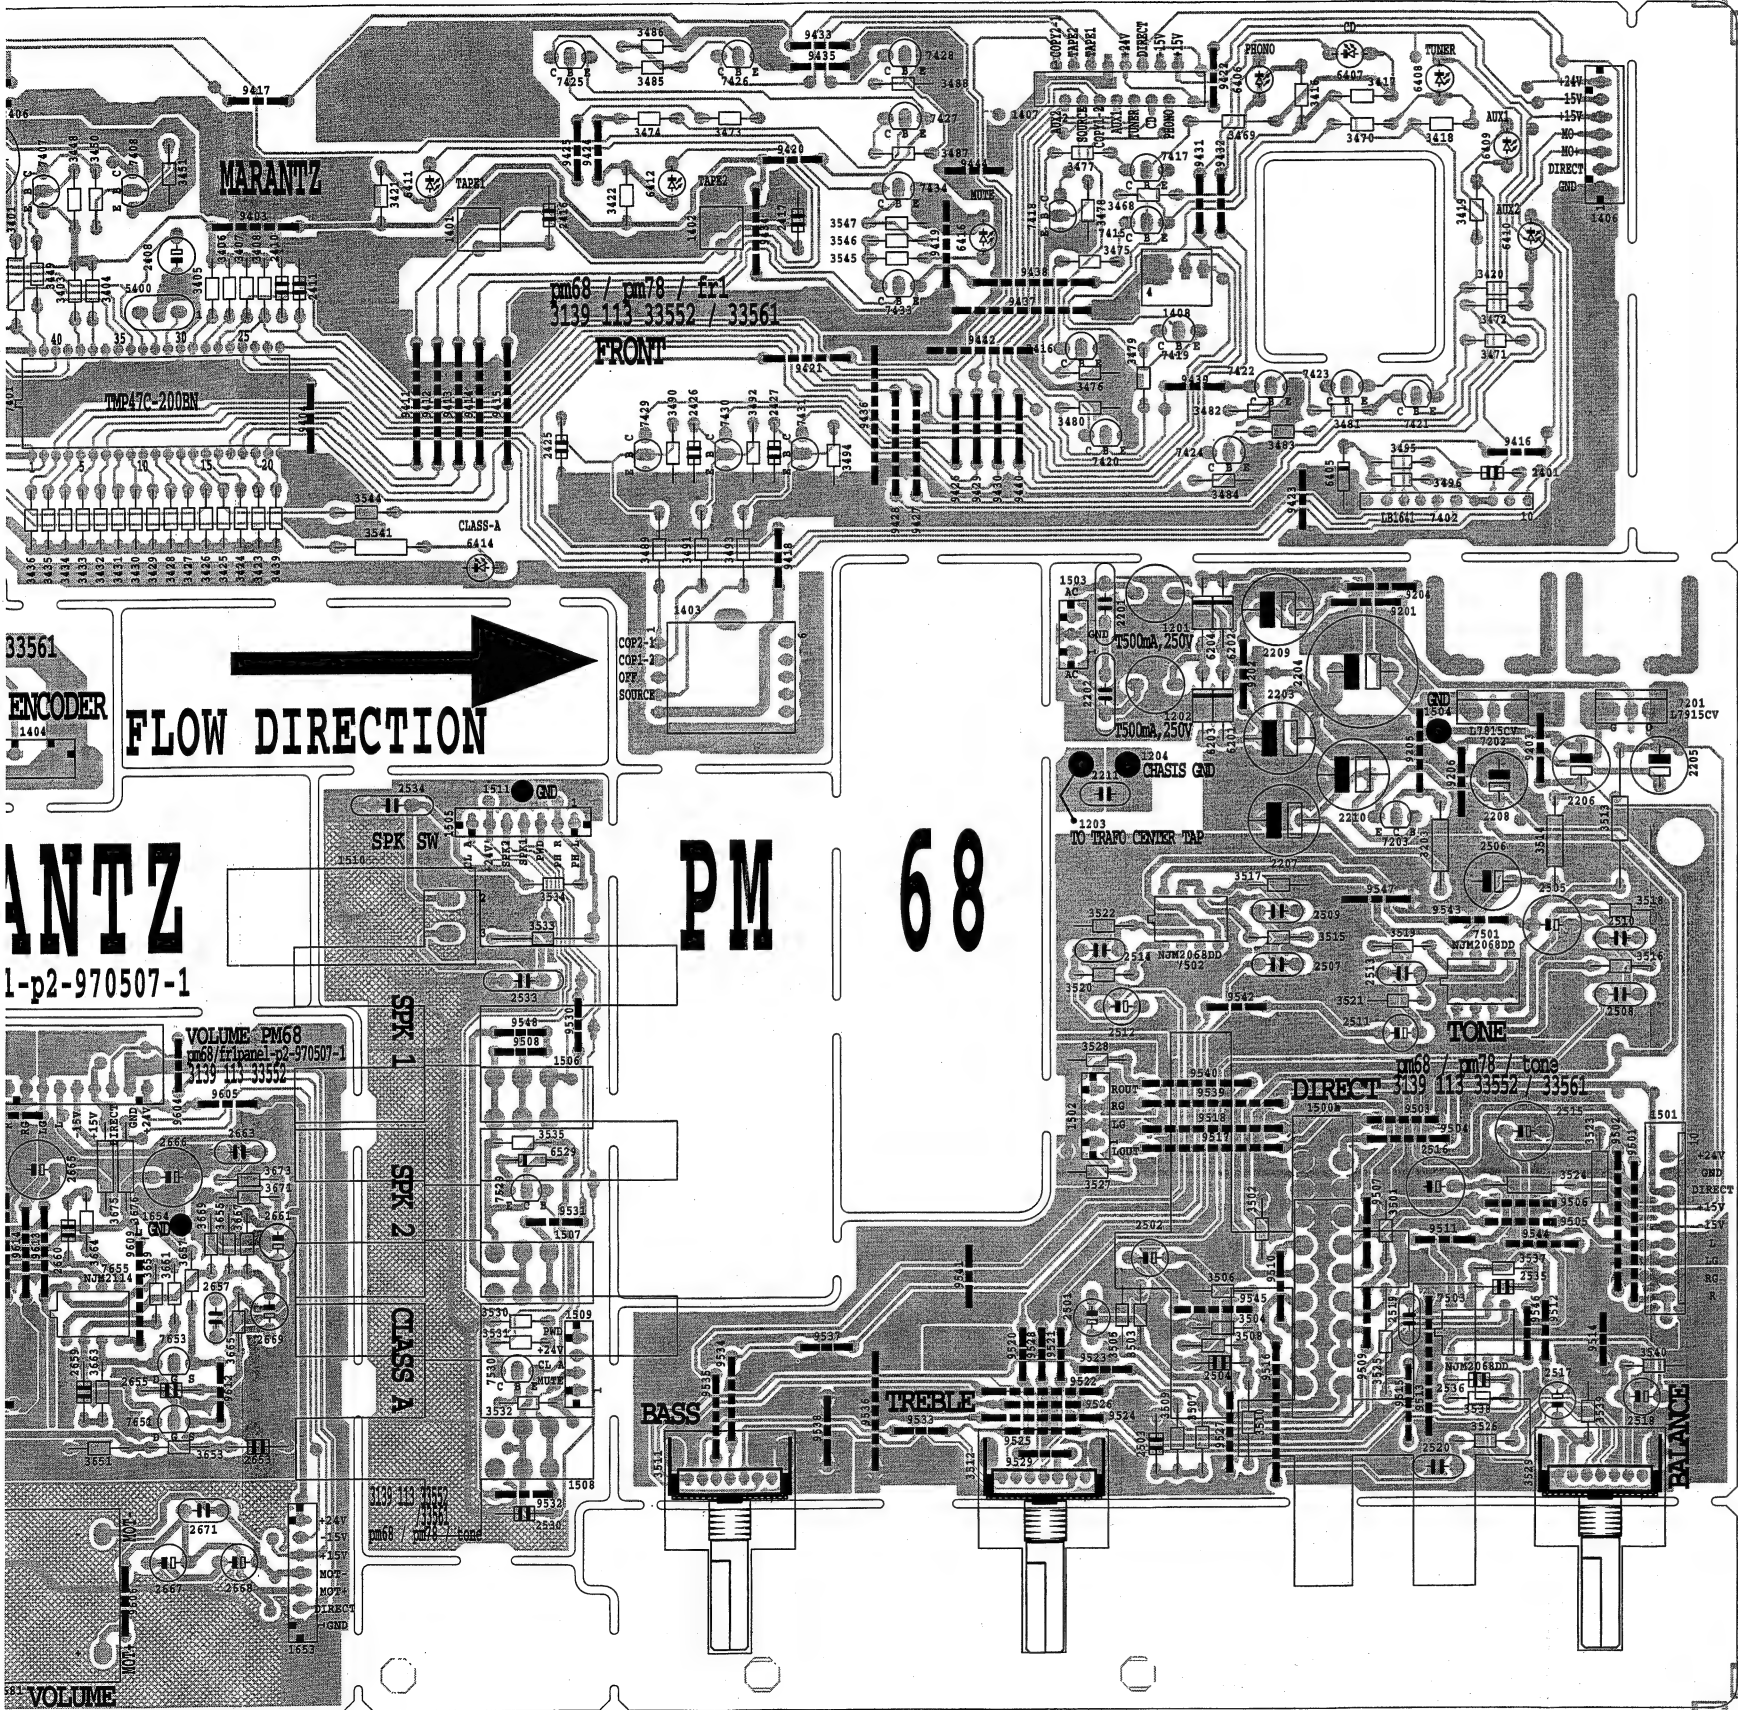


1201 B 7	6203 C 7	3655 E 3	3429 B 3	6417 A 1
1202 C 7	6204 C 7	3656 E 2	3430 B 3	6418 B 1
1203 C 7	6529 E 5	3657 E 3	3431 B 3	7401 B 3
1204 C 7	7201 C 9	3658 E 2	3432 B 3	7402 B 8
1500a E 8	7202 C 9	3659 E 3	3433 B 3	7403 C 2
1500b E 8	7203 C 8	3660 E 2	3434 B 3	7404 A 1
1501 E 9	7501 D 9	3661 E 3	3435 B 3	7405 A 2
1502 E 7	7502 D 7	3662 E 2	3436 B 3	7406 A 2
1503 C 7	7503 E 9	3663 F 3	3437 B 3	7407 A 3
1504 C 8	7529 E 5	3664 E 3	3438 B 2	7408 A 3
1505 C 5	7530 F 5	3665 E 4	3439 B 4	7409 A 2
1506 D 5	9201 B 8	3666 E 2	3440 B 1	7410 A 2
1507 E 5	9202 C 8	3667 E 4	3441 A 1	7411 A 2
1508 F 5	9203 C 9	3668 E 2	3442 A 1	7412 B 2
1509 F 5	9204 B 8	3669 E 3	3443 A 1	7413 B 1
1510 D 4	9205 C 8	3670 E 2	3444 A 2	7414 A 1
1511 C 5	9206 C 9	3671 E 4	3445 A 2	7415 A 7
2201 B 7	9501 E 9	3672 E 2	3446 A 2	7416 A 7
2202 C 7	9502 E 9	3673 E 4	3447 A 2	7417 A 7
2203 C 8	9503 E 8	3674 E 2	3448 A 3	7418 A 7
2204 C 8	9504 E 8	3675 E 3	3449 A 3	7419 A 7
2205 C 9	9505 E 9	3676 E 3	3450 A 3	7420 B 7
2206 C 9	9506 E 9	3681 F 2	3451 A 3	7421 B 8
2207 C 8	9507 E 8	7651 F 3	3452 A 2	7422 B 8
2208 C 9	9508 D 5	7652 E 2	3453 B 2	7423 B 8
2209 C 8	9509 E 8	7653 F 3	3454 B 2	7424 B 8
2210 C 8	9510 E 8	7654 E 2	3455 A 2	7425 A 5
2211 C 7	9511 E 8	7655 E 3	3456 A 2	7426 A 6
2501 E 7	9512 E 9	9601 F 2	3457 A 2	7427 A 6
2502 E 7	9513 F 8	9602 F 2	3458 A 2	7428 A 6
2503 F 7	9514 E 9	9603 F 2	3459 B 2	7429 B 5
2504 F 8	9515 F 8	9604 D 3	3460 A 1	7430 B 6
2505 D 9	9516 F 8	9605 E 3	3461 B 2	7431 B 6
2506 D 9	9517 E 8	9606 F 3	3462 B 1	7432 B 2
2507 D 8	9518 E 8	9607 F 2	3463 B 2	7433 A 6
2508 D 9	9520 F 7	9608 F 2	3464 B 1	7434 A 6
2509 D 8	9521 F 7	9609 E 3	3465 B 1	9400 A 2
2510 D 9	9522 F 7	9610 E 3	3466 B 1	9402 A 3
2511 D 8	9523 F 7	9611 E 3	3467 B 1	9403 A 4
2512 D 7	9524 F 7	9612 F 3	3468 A 7	9404 B 4
2513 D 8	9525 F 7	9613 E 3	3469 A 8	9405 A 2
2514 D 7	9526 F 7	9614 E 3	3470 A 8	9406 B 2
2515 E 9	9527 F 8	9615 F 2	3471 A 9	9407 B 1
2516 E 8	9528 F 7	9616 E 2	3472 A 9	9408 A 1
2517 F 9	9529 F 7	-----	3473 A 6	9409 A 1
2518 F 9	9530 D 5	1401 A 5	3474 A 5	9410 A 1
2519 E 8	9531 E 5	1402 A 6	3475 A 7	9411 B 4
2520 F 8	9532 F 5	1403 C 6	3476 B 7	9412 B 4
2530 F 5	9533 F 6	1404 C 3	3477 A 7	9413 B 4
2533 D 5	9534 F 6	1405 A 1	3478 A 7	9414 B 5
2534 C 4	9535 F 5	1406 A 9	3479 B 7	9415 B 5
2535 E 9	9536 F 6	1407 A 7	3480 B 7	9416 B 9
2536 F 9	9537 F 6	1408 A 7	3481 B 8	9417 A 4
3203 C 8	9538 F 6	1409 C 2	3482 B 8	9418 B 6
3501 E 8	9539 E 8	2401 B 9	3483 B 8	9419 A 6
3502 E 8	9540 D 7	2403 A 1	3484 B 8	9420 A 6
3503 E 7	9541 E 7	2404 A 2	3485 A 5	9421 A 6
3504 E 8	9542 D 8	2405 A 2	3486 A 5	9422 A 8
3505 E 7	9543 D 9	2406 A 2	3487 A 6	9423 B 8
3506 E 8	9544 E 9	2407 A 3	3488 A 6	9424 A 5
3507 F 7	9545 E 8	2408 A 3	3489 B 5	9425 A 5
3508 F 8	9546 E 9	2409 A 1	3490 B 5	9426 B 6
3509 F 7	9547 D 8	2410 A 4	3491 B 5	9427 B 6
3510 F 8	9548 D 5	2411 A 4	3492 B 6	9428 B 6
3511 F 6	-----	2412 C 1	3493 B 6	9429 B 7
3512 F 7	-----	2413 B 1	3494 B 6	9430 B 7
3513 C 9	1651 F 2	2414 B 2	3495 B 8	9431 A 7
3514 C 9	1652 D 3	2415 B 1	3496 B 8	9432 A 8
3515 D 8	1653 F 4	2416 A 5	3497 C 2	9433 A 6
3516 D 9	1654 E 2	2417 A 6	3498 C 2	9434 A 6
3517 D 8	2651 F 2	2425 B 5	3541 B 4	9435 A 6
3518 D 9	2652 F 2	2426 B 5	3542 B 2	9436 B 6
3519 D 8	2653 F 4	2427 B 6	3543 B 2	9437 A 7
3520 D 7	2654 E 2	2428 A 1	3544 B 4	9438 A 7
3521 D 8	2655 F 3	3401 A 3	3545 A 6	9439 B 7
3522 D 7	2656 E 2	3402 A 1	3546 A 6	9440 B 7
3523 E 9	2657 E 3	3403 A 3	3547 A 6	9441 A 1
3524 E 9	2658 E 2	3404 A 3	5400 A 3	9442 A 7
3525 E 8	2659 F 3	3405 A 3	5401 A 1	9443 A 2
3526 F 9	2660 E 3	3406 A 3	6401 A 2	9444 A 7
3527 E 7	2661 E 4	3407 A 4	6402 A 1	
3528 D 7	2662 E 2	3408 A 4	6403 B 1	
3529 F 9	2663 E 4	3416 A 8	6404 A 1	
3530 E 5	2664 E 2	3417 A 8	6405 B 8	
3531 E 5	2665 E 3	3418 A 8	6406 A 8	
3532 F 5	2666 E 3	3419 A 9	6407 A 8	
3533 D 5	2667 F 3	3420 A 9	6408 A 8	
3534 D 5	2668 F 4	3421 A 4	6409 A 9	
3535 E 5	2669 E 4	3422 A 5	6410 A 9	
3537 E 9	2670 E 2	3423 B 4	6411 A 4	
3538 F 9	2671 F 3	3424 B 4	6412 A 5	
3539 F 9	3651 F 3	3425 B 3	6413 B 1	
3540 F 9	3652 F 2	3426 B 3	6414 B 5	
6201 C 8	3653 F 3	3427 B 3	6415 B 2	
6202 C 8	3654 E 2	3428 B 3	6416 A 7	

3 4 5 6 7 8 9








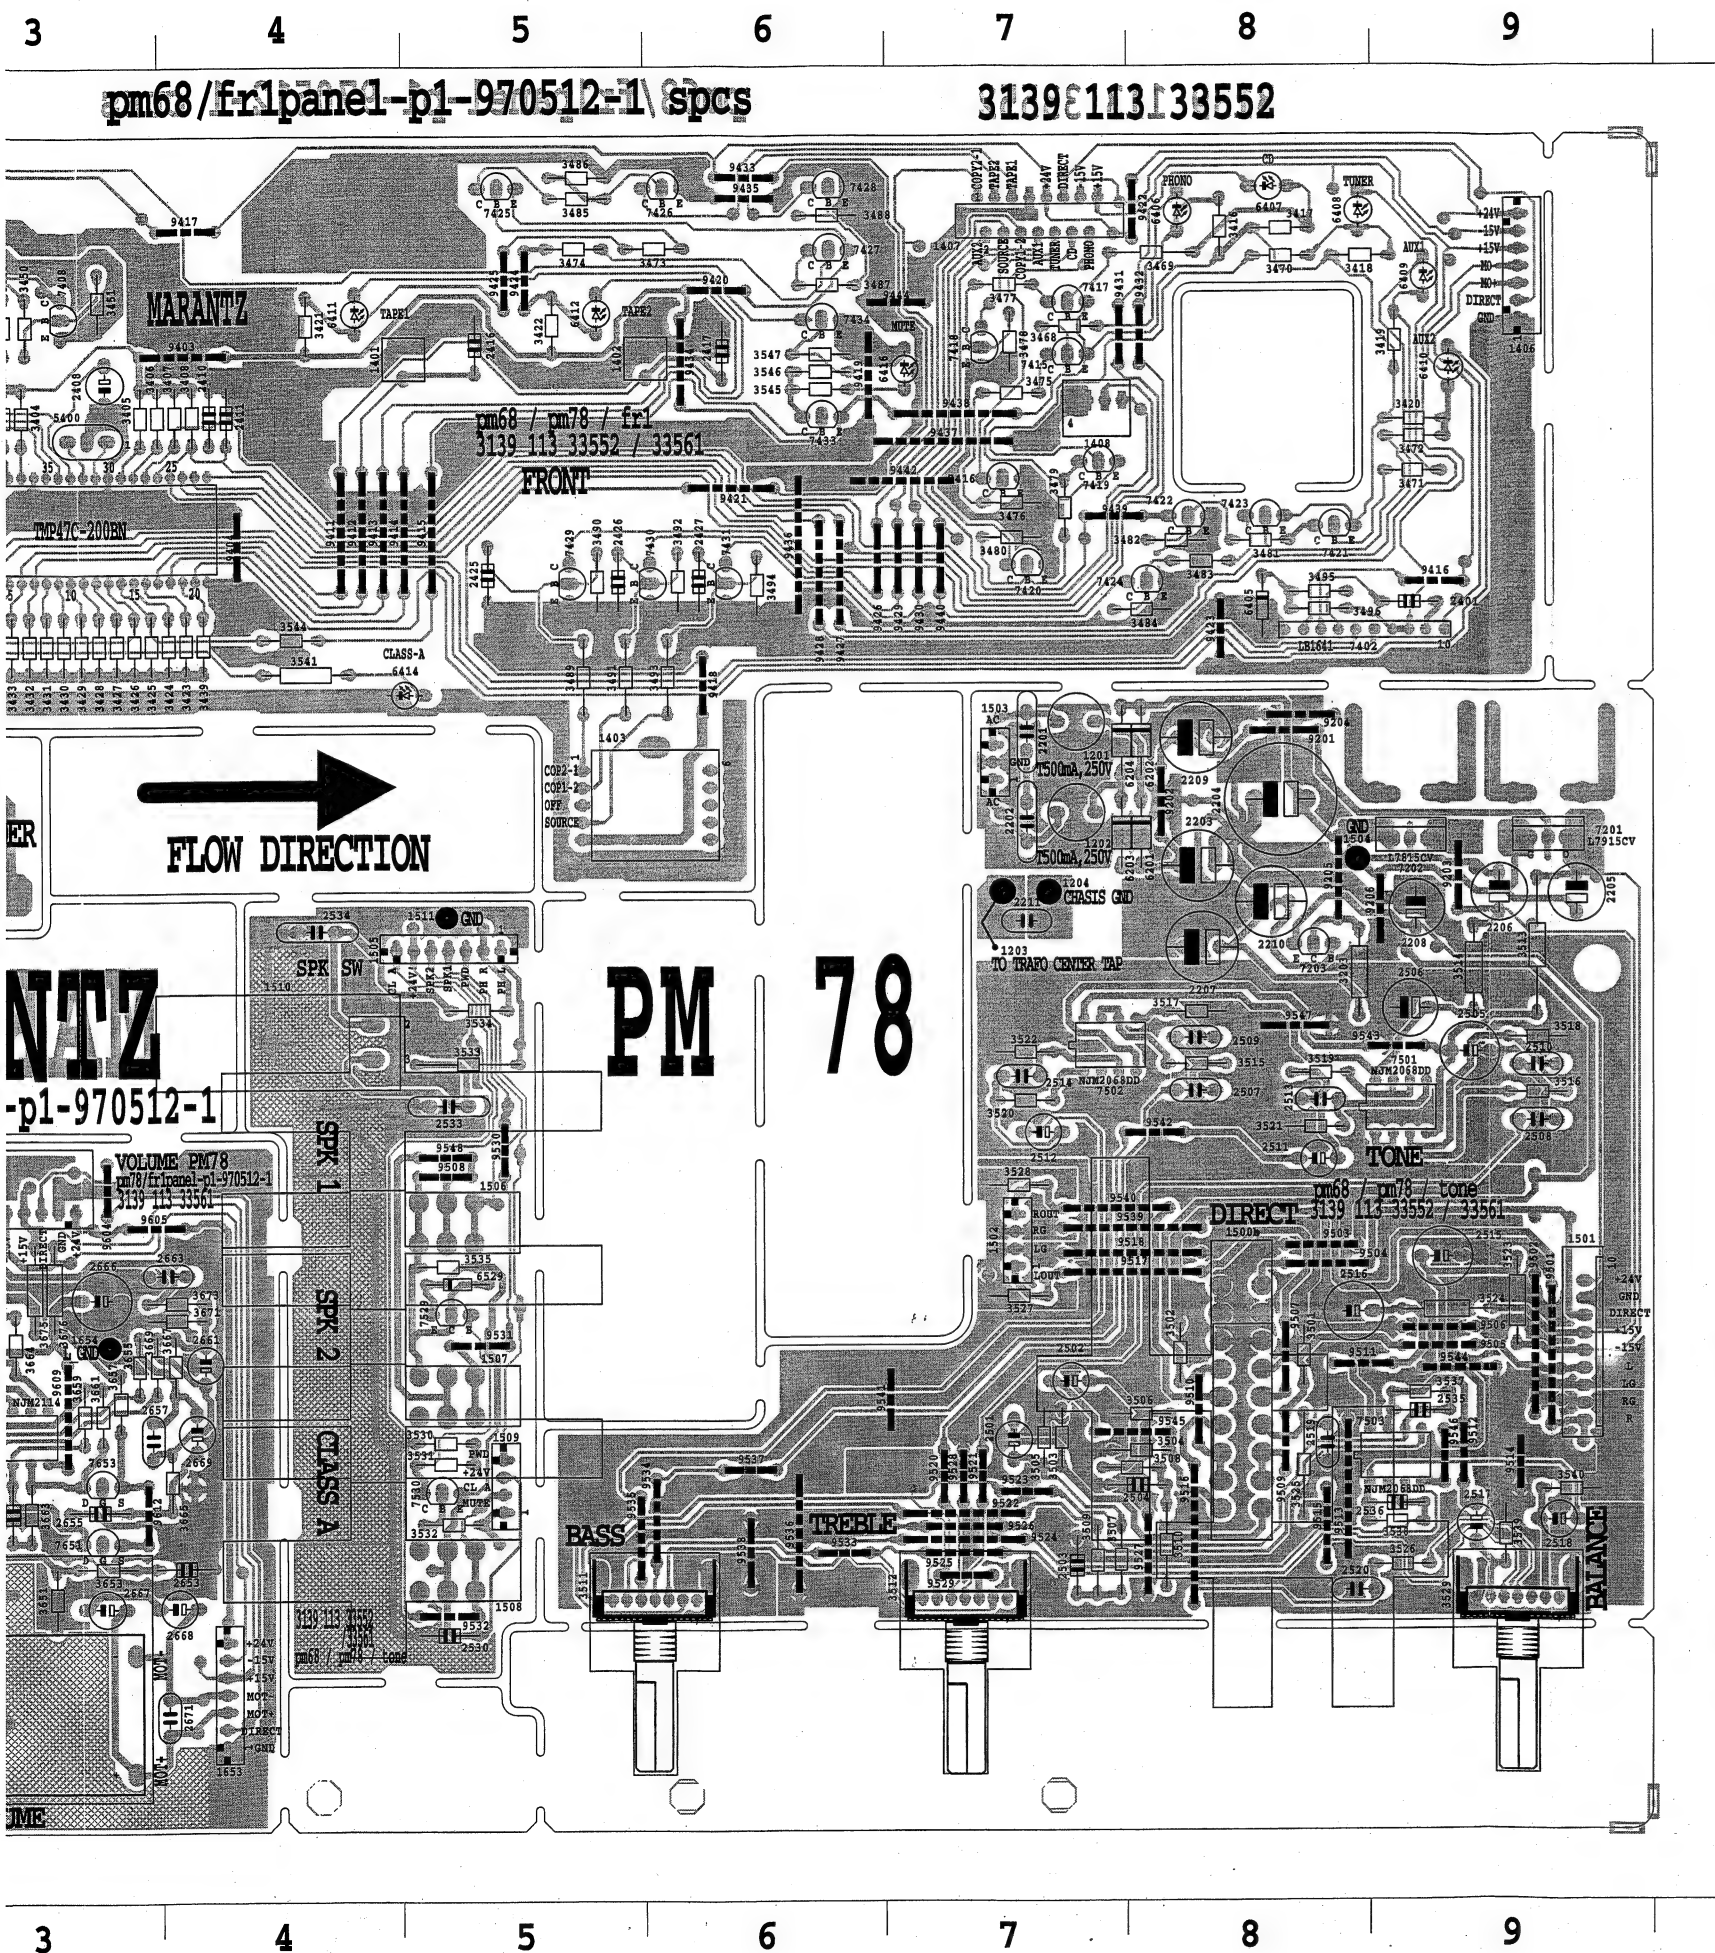


1201 B 7	3517 D 8	9523 F 7	3430 B 3	7402 B 8
1202 C 7	3518 D 9	9524 F 7	3431 B 3	7403 C 2
1203 C 7	3519 D 8	9525 F 7	3432 B 3	7404 A 1
1204 C 7	3520 D 7	9526 F 7	3433 B 3	7405 A 2
1500a E 8	3521 D 8	9527 F 8	3434 B 3	7406 A 2
1500b E 8	3522 D 7	9528 F 7	3435 B 3	7407 A 3
1501 E 9	3523 E 9	9529 F 7	3436 B 3	7408 A 3
1502 E 7	3524 E 9	9530 D 5	3437 B 3	7409 A 2
1503 C 7	3525 E 8	9531 E 5	3438 B 2	7410 A 2
1504 C 8	3526 F 9	9532 F 5	3439 B 4	7411 A 2
1505 C 5	3527 E 7	9533 F 6	3440 B 1	7412 B 2
1506 D 5	3528 D 7	9534 F 6	3441 A 1	7413 B 1
1507 E 5	3529 F 9	9535 F 5	3442 A 1	7414 A 1
1508 F 5	3530 E 5	9536 F 6	3443 A 1	7415 A 7
1509 F 5	3531 E 5	9537 F 6	3444 A 2	7416 A 7
1510 D 4	3532 F 5	9538 F 6	3445 A 2	7417 A 7
1511 C 5	3533 D 5	9539 E 8	3446 A 2	7418 A 7
1651 F 2	3534 D 5	9540 D 7	3447 A 2	7419 A 7
1652 D 3	3535 E 5	9541 E 7	3448 A 3	7420 B 7
1653 F 4	3537 E 9	9542 D 8	3449 A 3	7421 B 8
1654 E 2	3538 F 9	9543 D 9	3450 A 3	7422 B 8
2201 B 7	3539 F 9	9544 E 9	3451 A 3	7423 B 8
2202 C 7	3540 F 9	9545 E 8	3452 A 2	7424 B 8
2203 C 8	3651 F 3	9546 E 9	3453 B 2	7425 A 5
2204 C 8	3652 F 2	9547 D 8	3454 B 2	7426 A 6
2205 C 9	3653 F 3	9548 D 5	3455 A 2	7427 A 6
2206 C 9	3654 E 2	9601 F 2	3456 A 2	7428 A 6
2207 C 8	3655 E 3	9602 F 2	3457 A 2	7429 B 5
2208 C 9	3656 E 2	9603 F 2	3458 A 2	7430 B 6
2209 C 8	3657 E 3	9604 D 3	3459 B 2	7431 B 6
2210 C 8	3658 E 2	9605 E 3	3460 A 1	7432 B 2
2211 C 7	3659 E 3	9606 F 3	3461 B 2	7433 A 6
2501 E 7	3660 E 2	9607 F 2	3462 B 1	7434 A 6
2502 E 7	3661 E 3	9608 F 2	3463 B 2	9400 A 2
2503 F 7	3662 E 2	9609 E 3	3464 B 1	9402 A 3
2504 F 8	3663 F 3	9610 E 3	3465 B 1	9403 A 4
2505 D 9	3664 E 3	9611 E 3	3466 B 1	9404 B 4
2506 D 9	3665 E 4	9612 F 3	3467 B 1	9405 A 2
2507 D 8	3666 E 2	9613 E 3	3468 A 7	9406 B 2
2508 D 9	3667 E 4	9614 E 3	3469 A 8	9407 B 1
2509 D 8	3668 E 2	9615 F 2	3470 A 8	9408 A 1
2510 D 9	3669 E 3	9616 E 2	3471 A 9	9409 A 1
2511 D 8	3670 E 2	----	3472 A 9	9410 A 1
2512 D 7	3671 E 4	----	3473 A 6	9411 B 4
2513 D 8	3672 E 2	1401 A 5	3474 A 5	9412 B 4
2514 D 7	3673 E 4	1402 A 6	3475 A 7	9413 B 4
2515 E 9	3674 E 2	1403 C 6	3476 B 7	9414 B 5
2516 E 8	3675 E 3	1404 C 3	3477 A 7	9415 B 5
2517 F 9	3676 E 3	1405 A 1	3478 A 7	9416 B 9
2518 F 9	3681 F 2	1406 A 9	3479 B 7	9417 A 4
2519 E 8	6201 C 8	1407 A 7	3480 B 7	9418 B 6
2520 F 8	6202 C 8	1408 A 7	3481 B 8	9419 A 6
2530 F 5	6203 C 7	1409 C 2	3482 B 8	9420 A 6
2533 D 5	6204 C 7	2401 B 9	3483 B 8	9421 A 6
2534 C 4	6529 E 5	2403 A 1	3484 B 8	9422 A 8
2535 E 9	7201 C 9	2404 A 2	3485 A 5	9423 B 8
2536 F 9	7202 C 9	2405 A 2	3486 A 5	9424 A 5
2651 F 2	7203 C 8	2406 A 2	3487 A 6	9425 A 5
2652 F 2	7501 D 9	2407 A 3	3488 A 6	9426 B 6
2653 F 4	7502 D 7	2408 A 3	3489 B 5	9427 B 6
2654 E 2	7503 E 9	2409 A 1	3490 B 5	9428 B 6
2655 F 3	7529 E 5	2410 A 4	3491 B 5	9429 B 7
2656 E 2	7530 F 5	2411 A 4	3492 B 6	9430 B 7
2657 E 3	7651 F 3	2412 C 1	3493 B 6	9431 A 7
2658 E 2	7652 E 2	2413 B 1	3494 B 6	9432 A 8
2659 F 3	7653 F 3	2414 B 2	3495 B 8	9433 A 6
2660 E 3	7654 E 2	2415 B 1	3496 B 8	9434 A 6
2661 E 4	7655 E 3	2416 A 5	3497 C 2	9435 A 6
2662 E 2	9201 B 8	2417 A 6	3498 C 2	9436 B 6
2663 E 4	9202 C 8	2425 B 5	3541 B 4	9437 A 7
2664 E 2	9203 C 9	2426 B 5	3542 B 2	9438 A 7
2665 E 3	9204 B 8	2427 B 6	3543 B 2	9439 B 7
2666 E 3	9205 C 8	2428 A 1	3544 B 4	9440 B 7
2667 F 3	9206 C 9	3401 A 3	3545 A 6	9441 A 1
2668 F 4	9501 E 9	3402 A 1	3546 A 6	9442 A 7
2669 E 4	9502 E 9	3403 A 3	3547 A 6	9443 A 2
2670 E 2	9503 E 8	3404 A 3	5400 A 3	9444 A 7
2671 F 3	9504 E 8	3405 A 3	5401 A 1	
3203 C 8	9505 E 9	3406 A 3	6401 A 2	
3501 E 8	9506 E 9	3407 A 4	6402 A 1	
3502 E 8	9507 E 8	3408 A 4	6403 B 1	
3503 E 7	9508 D 5	3416 A 8	6404 A 1	
3504 E 8	9509 E 8	3417 A 8	6405 B 8	
3505 E 7	9510 E 8	3418 A 8	6406 A 8	
3506 E 8	9511 E 8	3419 A 9	6407 A 8	
3507 F 7	9512 E 9	3420 A 9	6408 A 8	
3508 F 8	9513 F 8	3421 A 4	6409 A 9	
3509 F 7	9514 E 9	3422 A 5	6410 A 9	
3510 F 8	9515 F 8	3423 B 4	6411 A 4	
3511 F 6	9516 F 8	3424 B 4	6412 A 5	
3512 F 7	9517 E 8	3425 B 3	6413 B 1	
3513 C 9	9518 E 8	3426 B 3	6414 B 5	
3514 C 9	9520 F 7	3427 B 3	6415 B 2	
3515 D 8	9521 F 7	3428 B 3	6416 A 7	
3516 D 9	9522 F 7	3429 B 3	7401 B 3	

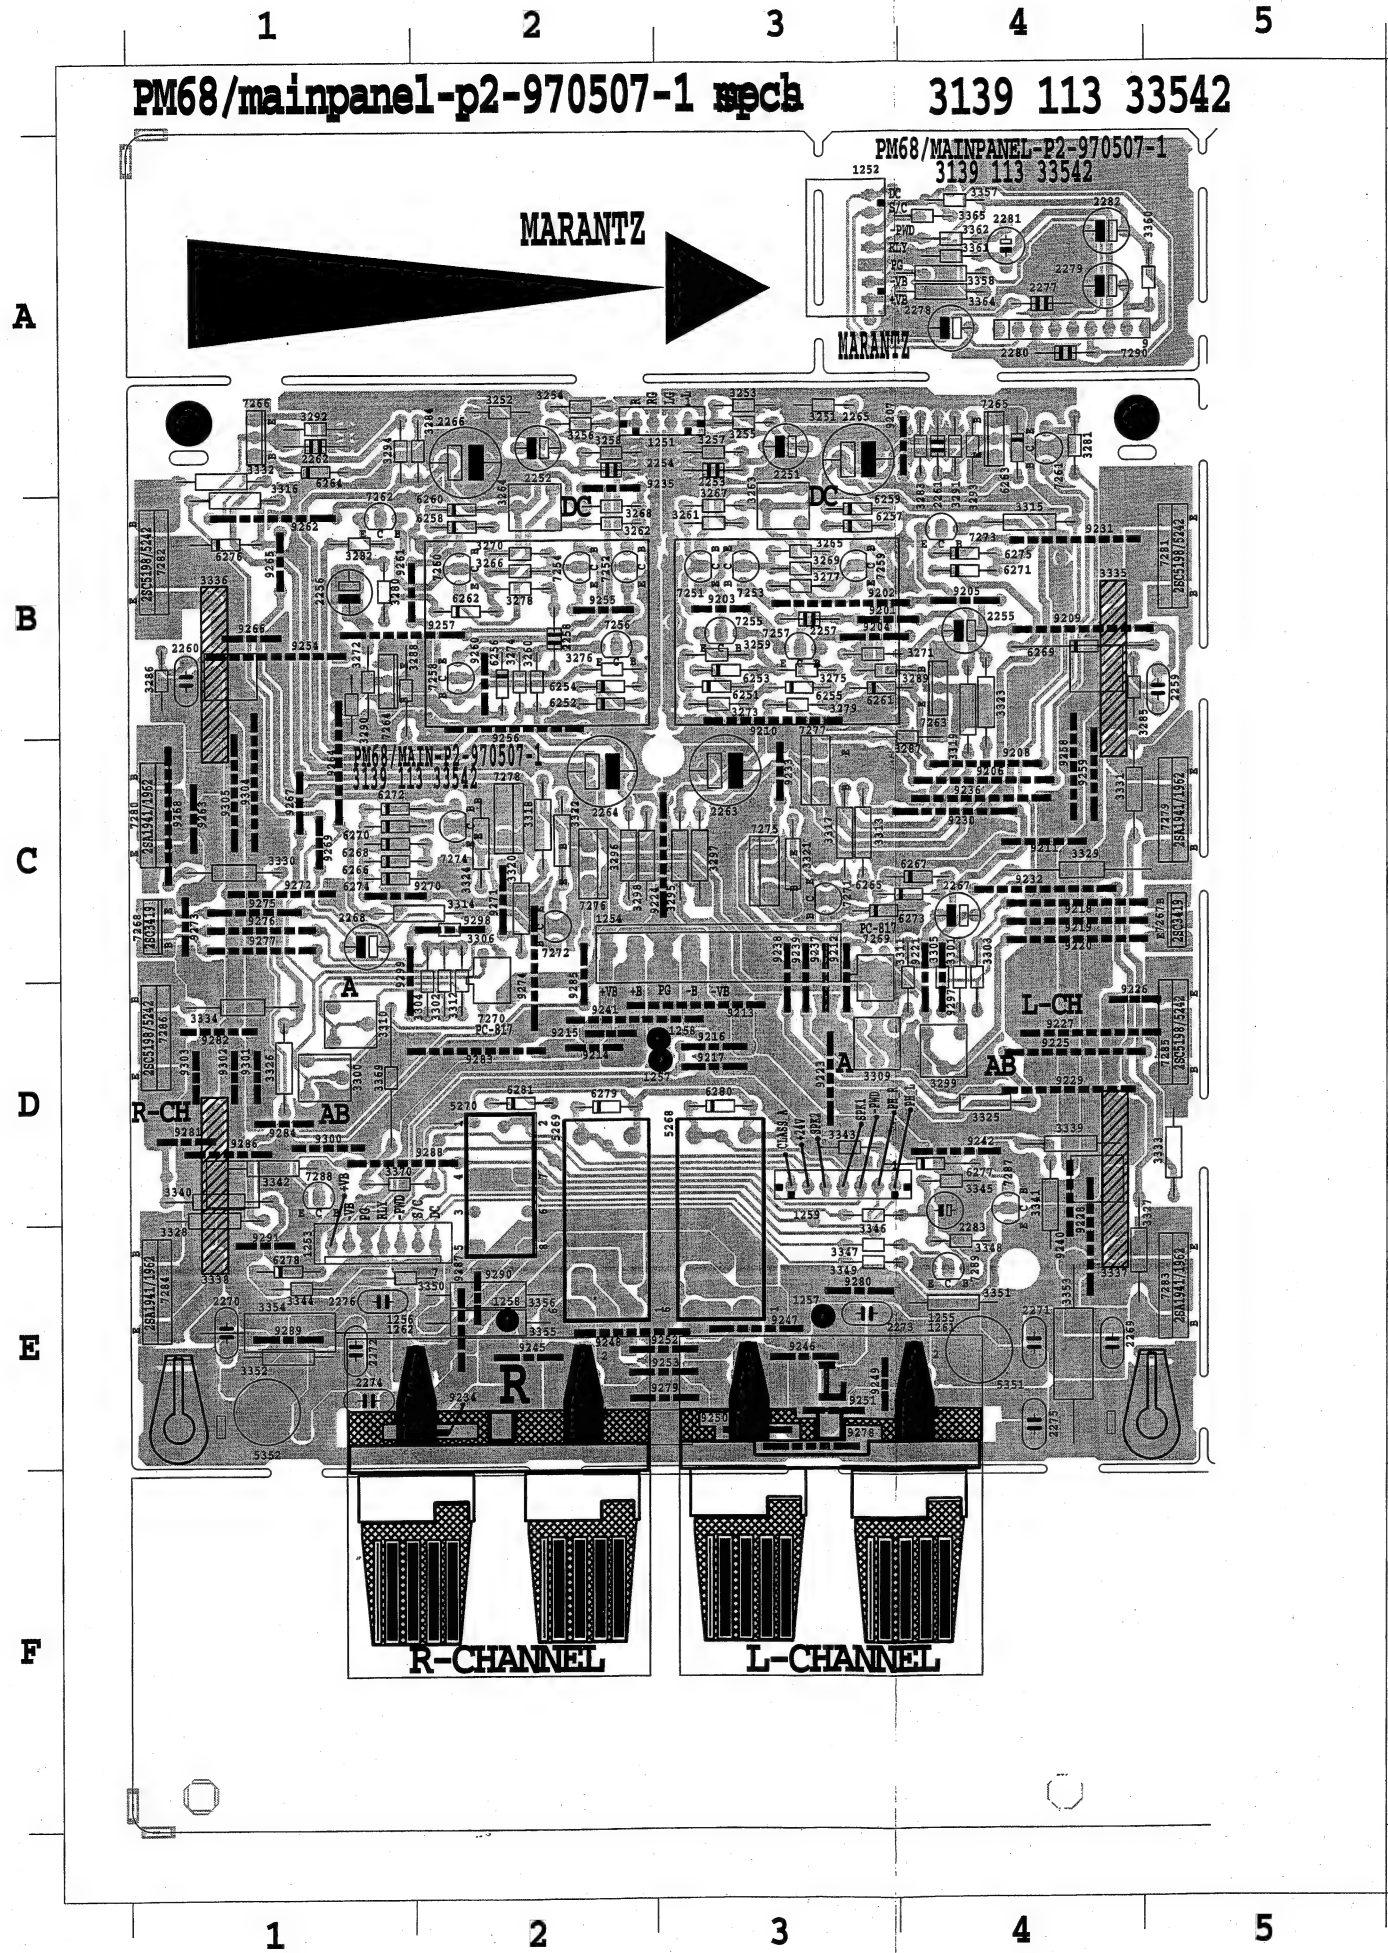

1251 A 3	3304 D 2	6281 D 2	9256 B 2
1252 A 3	3305 D 4	7251 B 3	9257 B 1
1253 E 1	3306 C 2	7252 B 2	9258 C 4
1254 C 3	3309 D 3	7253 B 3	9259 C 4
1255 F 3	3310 D 1	7254 B 2	9260 B 2
1256 F 2	3311 D 4	7255 B 3	9261 B 1
1259 D 3	3312 D 2	7256 B 2	9262 B 1
1261 F 3	3313 C 3	7257 B 3	9263 C 1
1262 F 2	3314 C 2	7258 B 2	9264 C 1
2251 A 3	3315 B 4	7259 B 3	9265 B 1
2252 A 2	3316 B 1	7260 B 2	9266 B 1
2253 A 3	3317 C 3	7261 A 4	9267 C 1
2254 A 2	3318 C 2	7262 B 1	9268 C 1
2255 B 4	3319 B 4	7263 B 4	9269 C 1
2256 B 1	3320 C 2	7264 B 1	9270 C 1
2257 B 3	3321 C 3	7265 A 4	9271 C 2
2258 B 2	3322 C 2	7266 A 1	9272 C 1
2259 B 5	3323 B 4	7267 C 5	9273 C 1
2260 B 1	3324 C 2	7268 C 1	9274 C 2
2261 A 4	3325 D 4	7269 D 3	9275 C 1
2262 A 1	3326 D 1	7270 D 2	9276 C 1
2263 C 3	3327 E 4	7271 C 3	9277 C 1
2264 C 2	3328 D 1	7272 C 2	9278 E 3
2265 A 3	3329 C 4	7273 B 4	9279 E 3
2266 A 2	3330 C 1	7274 C 2	9280 E 3
2267 C 4	3331 C 4	7275 C 3	9281 D 1
2268 C 1	3332 A 1	7276 C 2	9282 D 1
2269 E 4	3333 D 5	7277 C 3	9283 D 2
2270 E 1	3334 D 1	7278 C 2	9284 D 1
2271 E 4	3335 B 4	7279 C 5	9285 C 2
2272 E 1	3336 B 1	7280 C 1	9286 D 1
2273 E 3	3337 D 4	7281 B 5	9287 E 2
2274 E 1	3338 D 1	7282 B 1	9288 D 1
2275 E 4	3339 D 4	7283 E 5	9289 E 1
2276 E 1	3340 D 1	7284 E 1	9290 E 2
2277 A 4	3341 D 4	7285 D 5	9291 E 1
2278 A 4	3342 D 1	7286 D 1	9297 D 4
2279 A 4	3343 D 3	7287 D 4	9298 C 2
2280 A 4	3344 E 1	7288 D 1	9299 D 1
2281 A 4	3345 D 4	7289 E 4	9300 D 1
2282 A 4	3346 D 3	7290 A 4	9301 D 1
2283 D 4	3347 E 3	9201 B 3	9302 D 1
3251 A 3	3348 E 4	9202 B 3	9303 D 1
3252 A 2	3349 E 3	9203 B 3	9304 C 1
3253 A 3	3350 E 1	9204 B 3	9305 C 1
3254 A 2	3351 E 4	9205 B 4	----
3255 A 3	3352 E 1	9206 C 4	
3256 A 2	3353 E 4	9207 A 4	
3257 A 3	3354 E 1	9208 C 4	
3258 A 2	3355 E 2	9209 B 4	
3259 B 3	3356 E 2	9210 B 3	
3260 B 2	3357 A 4	9211 C 4	
3261 B 3	3358 A 4	9212 D 3	
3262 B 2	3360 A 5	9213 D 3	
3263 B 3	3361 A 4	9214 D 2	
3264 B 2	3362 A 4	9215 D 2	
3265 B 3	3364 A 4	9216 D 3	
3266 B 2	3365 A 4	9217 D 3	
3267 B 3	3369 D 1	9218 C 4	
3268 B 2	3370 D 1	9219 C 4	
3269 B 3	5268 E 3	9220 C 4	
3270 B 2	5269 E 2	9221 D 4	
3271 B 3	5270 D 2	9223 D 3	
3272 B 1	5351 E 4	9224 C 3	
3273 B 3	5352 E 1	9225 D 4	
3274 B 2	6251 B 3	9226 D 4	
3275 B 3	6252 B 2	9227 D 4	
3276 B 2	6253 B 3	9228 E 4	
3277 B 3	6254 B 2	9229 D 4	
3278 B 2	6255 B 3	9230 C 4	
3279 B 3	6256 B 2	9231 B 4	
3280 B 1	6257 B 3	9232 C 4	
3281 A 4	6258 B 2	9233 C 3	
3282 B 1	6259 B 3	9234 E 2	
3283 A 4	6260 B 2	9235 A 2	
3284 A 2	6261 B 3	9236 C 4	
3285 B 4	6262 B 2	9237 D 3	
3286 B 1	6263 A 4	9238 D 3	
3287 C 4	6264 A 1	9239 D 3	
3288 B 1	6265 C 4	9240 D 4	
3289 B 3	6266 C 1	9241 D 2	
3290 B 1	6267 C 4	9242 D 4	
3291 A 4	6268 C 1	9243 D 3	
3292 A 1	6269 B 4	9244 D 3	
3293 A 4	6270 C 1	9245 E 2	
3294 A 1	6271 B 4	9246 E 3	
3295 C 3	6272 C 1	9247 E 3	
3296 C 2	6273 C 3	9248 E 2	
3297 C 3	6274 C 1	9249 E 3	
3298 C 2	6275 B 4	9250 E 3	
3299 D 4	6276 B 1	9251 E 3	
3300 D 1	6277 D 4	9252 E 3	
3301 D 4	6278 E 1	9253 E 3	
3302 D 2	6279 D 2	9254 B 1	
3303 D 4	6280 D 3	9255 B 2	



7. EXPLODED VIEW AND PARTS LIST  
EXPLODED VIEW

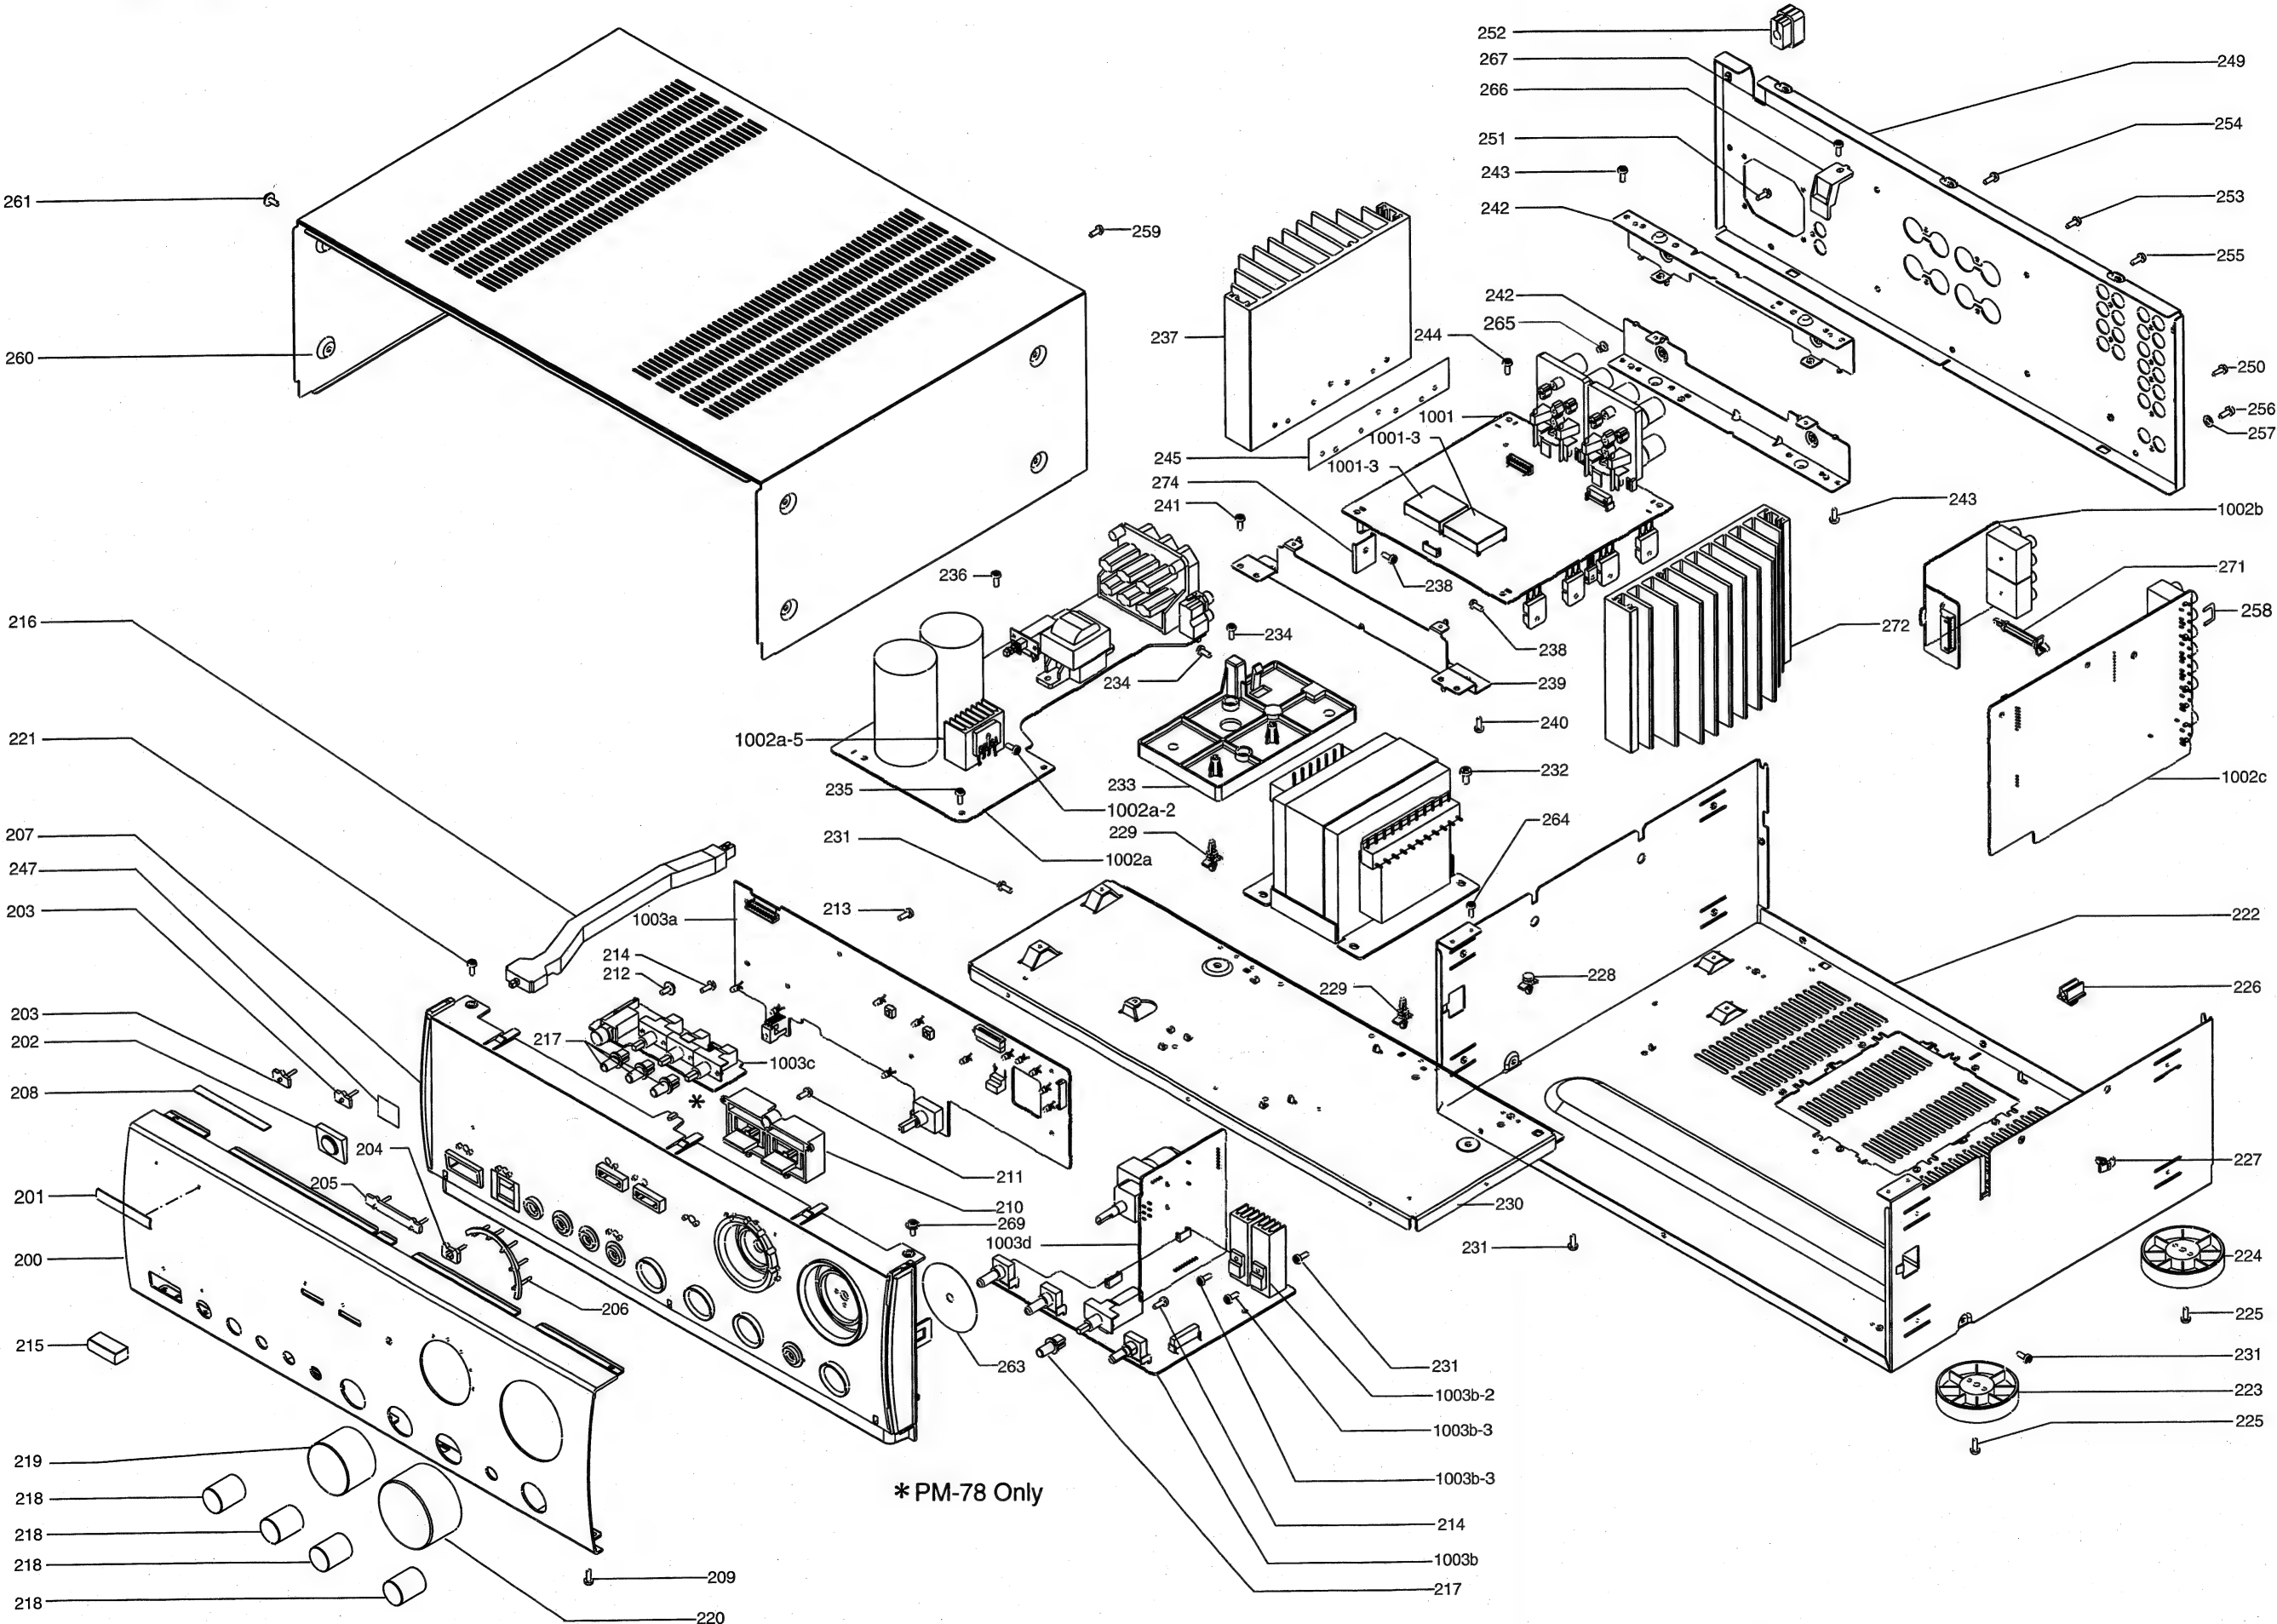

(VERS.:VERSION, U:U.S.A., F:JAPAN, K:FAR EAST, \*\*EUROPE)

PM-68

POS. NO	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJI)
384		4822 219 10318	RC-HANDSET RC-68PM	QP21910318
▲ 385	/02	4822 321 10809	MAINS CORD 250V 2.5A	QP32110809
▲ 385	F	4822 321 11349	MAINS CORD 125V 12A	QP32111349
▲ 385	U	4822 321 10849	MAINS CORD 125V 10A	QP32110849
387	/02	4822 736 15481	DFU FOR /02	QP73615481
387	F	4822 736 15615	DFU FOR F	QP73615615
387	U	4822 736 15602	DFU FOR U	QP73615602
200	/02B,FB UBL	4822 459 04652	FRONT PANEL BL	214W248010
200	/02G FN	4822 459 04653	FRONT PANEL GL	214W248020
201	/02B,FB UBL	4822 454 11825	MARANTZ BADGE BL	185J251012
201	/02G FN	4822 459 11211	MARANTZ BADGE GL	185J251112
202		4822 450 10372	IR LENS	QP45010372
203		4822 380 10203	LENS STANDBY	QP38010203
204		4822 380 10204	LENS MUTE	QP38010204
205		4822 380 10205	LENS TAPE MONITOR	QP38010205
206		4822 380 10206	LENS FUNCTION	QP38010206
207	/02B,FB UBL	4822 459 04703	FRONT CHASSIS BL	QP45904703
207	/02G FN	4822 459 04705	FRONT CHASSIS GL	QP45904705
210	/02B,FB UBL	4822 410 11261	BUTTON TAPE MONITOR BL	QP41011261
210	/02G FN	4822 410 11262	BUTTON TAPE MONITOR GL	QP41011262
215	/02B,FB UBL	4822 462 72053	POWER BUTTON BL	QP46272053
215	/02G FN	4822 462 72053	POWER BUTTON GL	QP46272053
217	/02B,FB UBL	4822 410 60343	SPK BUTTON BL	058J270030
217	/02G FN	4822 410 11263	SPK BUTTON GL	058J270230
218	/02B,FB UBL	4822 413 41678	TONE KNOB BL	025J154080
218	/02G FN	4822 410 11264	TONE KNOB GL	025J154190
219	/02B,FB UBL	4822 413 41745	SELECTOR KNOB BL	064J154100
219	/02G FN	4822 410 11265	SELECTOR KNOB GL	064J154150
220	/02B,FB UBL	4822 410 10559	VOLUME KNOB BL	063J154080
220	/02G FN	4822 410 11266	VOLUME KNOB GL	063J154190
223		4822 462 42129	LEG FRONT	QP46242129
224		4822 462 42131	LEG REAR	QP46242131
▲ 252		4822 532 60948	MAINS CORD BUSH	QP53260948
1605		4822 323 10406	FLEX CABLE 15P	QP32310406
▲ 5011	/02	4822 146 10823	MAINS TRSF.EI96-60T	QP14610823
▲ 5011	F	4822 146 10859	MAINS TRSF.EI96-60T	QP14610859
▲ 5011	U	4822 146 10854	MAINS TRSF.EI96-60T	QP14610854
	/02B,FB UBL		PACKING CASE (3139 116 37750)	214W801010
	/02G FN		PACKING CASE (3139 116 38460)	214W801020
			CUSHION (3139 116 24990)	232W809010

(VERS.:VERSION, U:U.S.A., F:JAPAN, K:FAR EAST, \*\*EUROPE)

PM-78

POS. NO	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJI)
384		4822 219 10318	RC-HANDSET RC-68PM	QP21910318
▲ 385	/02	4822 321 10809	MAINS CORD 250V 2.5A	QP32110809
▲ 385	F	4822 321 11349	MAINS CORD 125V 12A	QP32111349
387	/02	4822 736 15481	DFU FOR /02	QP73615481
387	F	4822 736 15615	DFU FOR F	QP73615615
200	/02B,FB	4822 459 04702	FRONT PANEL BL	232W248010
200	/02G FN	4822 459 04704	FRONT PANEL GL	232W248020
201	/02B,FB	4822 454 11825	MARANTZ BADGE BL	185J251012
201	/02G FN	4822 459 11211	MARANTZ BADGE GL	185J251112
202		4822 450 10372	IR LENS	QP45010372
203		4822 380 10203	LENS STANDBY	QP38010203
204		4822 380 10204	LENS MUTE	QP38010204
205		4822 380 10205	LENS TAPE MONITOR	QP38010205
206		4822 380 10206	LENS FUNCTION	QP38010206
207	/02B,FB	4822 459 04703	FRONT CHASSIS BL	QP45904703
207	/02G FN	4822 459 04705	FRONT CHASSIS GL	QP45904705
210	/02B,FB	4822 410 11261	BUTTON TAPE MONITOR BL	QP41011261
210	/02G FN	4822 410 11262	BUTTON TAPE MONITOR GL	QP41011262
215	/02B,FB	4822 462 72053	POWER BUTTON BL	QP46272053
215	/02G FN	4822 462 72053	POWER BUTTON GL	QP46272053
217	/02B,FB	4822 410 60343	SPK BUTTON BL	058J270030
217	/02G FN	4822 410 11263	SPK BUTTON GL	058J270230
218	/02B,FB	4822 413 41678	TONE KNOB BL	025J154080
218	/02G FN	4822 410 11264	TONE KNOB GL	025J154190
219	/02B,FB	4822 413 41745	SELECTOR KNOB BL	064J154100
219	/02G FN	4822 410 11265	SELECTOR KNOB GL	064J154150
220	/02B,FB	4822 410 10559	VOLUME KNOB BL	063J154080
220	/02G FN	4822 410 11266	VOLUME KNOB GL	063J154190
223		4822 462 42129	LEG FRONT	QP46242129
224		4822 462 42131	LEG REAR	QP46242131
▲ 252		4822 532 60948	MAINS CORD BUSH	QP53260948
1605		4822 323 10406	FLEX CABLE 15P	QP32310406
▲ 5011	/02	4822 146 10844	MAINS TRSF.EI96-60T	QP14610844
▲ 5011	F	4822 146 10853	MAINS TRSF.EI96-60T	QP14610853
	/02B,FB		PACKING CASE (3139 116 37770)	232W801010
	/02G FN		PACKING CASE (3139 116 38470)	232W801020
			CUSHION (3139 116 24990)	232W809010

## 8. IDLING CURRENT AND DC OFFSET VOLTAGE ALIGNMENT

### 8.1 Quiescent Current Adjustment for Class AB

-Set to CD mode with no input, minimum volume position & mains supply at 230 V  $\pm$  5 %.

-Power up the unit, adjust **SLOWLY** 3299 (L) & 3300 (R) until voltage across L-Channel ----- 3335 (T007 / T006) & 3337 (T009 / T010), R-Channel ----- 3336 (T013 / T014) & 3338 (T015 / T016) is as per the table below.

Time	Voltage
after 30 sec to 1 min*	$\geq 0.3$ mV to $< 0.4$ mV

- After 30 min, the voltage should settle down to 18 mV  $\pm$  3 mV.

\* Start from cold condition.

### 8.2 Quiescent Current Adjustment for Class A.

- Next, switch to Class A operation. Adjust **SLOWLY** 3309 (L) & 3310 (R) until voltage across L-Channel ----- 3335 (T007 / T006) & 3337 (T009 / T010), R-Channel ----- 3336 (T013 / T014) & 3338 (T015 / T016) is as per the table below.

Time	Voltage
after 0 sec to 30 sec**	$\geq 65$ mV to $< 70$ mV


- After 30 min, the voltage should settle down to 90 mV  $\pm$  5 mV.

\*\* Continue immediately after 8.1

### REMARKS:

- Please take note that for both Class AB & A alignment, at all time during adjustment, refer to the higher reading of each channel.

Quiescent Current  
Measurement point



POS.No.  
3335  
3337  
3336  
3338

### 8.3 DC Offset.

- Adjust 3263 and 3264 until DC offset voltage is less than  $\pm 10$  mV at Speaker output terminal.

## 8. アイドリング電流および DC オフセット電圧調整

### 8.1 アイドリング電流調整 (Class AB)

1) 本体の電源スイッチを入れる前に、ボリュームを最小に、バランス及びトーンコントロールをセンターに合わせます。

2) CD モードにし、電源電圧を 100V にします。

3) セメント抵抗、3335 (T0007 / T0006)、3337 (T0009 / T0010) の L チャンネルと 3336 (T0013 / T0014)、3338 (T0015 / T0016) の R チャンネル各々の電圧が下記の値になるまで、半固定抵抗 3299 (L) と 3300 (R) をゆっくり調整します。

時間	電圧
30 秒 - 1 分 *	0.3mV 以上 0.4mV 以下

30 分後、電圧は 18mV  $\pm$  3mV に安定します。

\* 冷却状態からスタートします。

### 8.2 アイドリング電流調整 (Class A)

1) A クラス動作に切り換えます。

2) セメント抵抗 3335 (T0007 / T0006)、3337 (T0009 / T0010) の L チャンネルと 3336 (T0013 / T0014)、3338 (T0015 / T0016) の R チャンネル各々の電圧が下記の値になるまで、半固定抵抗 3309 (L) と 3310 (R) をゆっくり調整します。


時間	電圧
0 秒 - 30 秒 **	65mV 以上 70mV 以下

30 分後、電圧は 90mV  $\pm$  5mV に安定します。

\*\* 切換え後、すぐに行ってください。

注意：A クラス動作及び AB クラス動作のアイドリング電流調整において、同チャンネル内の 2 ケ所の測定点で指示値に差異があった場合は、高い方の電圧値が調整範囲内となるようにします。

アイドリング電流  
測定点



POS.No.  
3335  
3337  
3336  
3338

### 8.3 DC オフセット電圧調整

DC オフセット電圧が、スピーカー出力端子で 10mV 以下になるまで半固定抵抗 3263 と 3264 を調整します。

## 11. ELECTRICAL PARTS LIST

### ASSIGNMENT OF COMMON PARTS CODES.

#### RESISTORS

R\*\*\* : 1) GD05 × × × 140, Carbon film fixed resistor, ±5% 1/4W  
 R\*\*\* : 2) GD05 × × × 160, Carbon film fixed resistor, ±5% 1/6W

① — Resistance value

Examples ;

① Resistance value

0.1Ω ... 001	10Ω ... 100	1kΩ ... 102	100kΩ ... 104
0.5Ω ... 005	18Ω ... 180	2.7kΩ ... 272	680kΩ ... 684
1Ω ... 010	100Ω ... 101	10kΩ ... 103	1MΩ ... 105
6.8Ω ... 068	390Ω ... 391	22kΩ ... 223	4.7MΩ ... 475

Note : Please distinguish 1/4W from 1/6W by the shape of parts used actually.

#### CAPACITORS

C\*\*\* : CERAMIC CAP.

3) DD1 × × × × 370,

Ceramic capacitor  
 Disc type  
 Temp.coeff.P350 ~ N1000, 50V  
 Capacity value  
 Tolerance

Examples ;

② Tolerance (Capacity deviation)

±0.25pF ... 0  
 ±0.5pF ... 1  
 ±5% ... 5

\* Tolerance of COMMON PARTS handled here are as follows :

0.5pF ~ 5pF ... ±0.25pF  
 6pF ~ 10pF ... ±0.5pF  
 12pF ~ 560pF ... ±5%

③ Capacity value

0.5pF ... 005	3pF ... 030	100pF ... 101
1pF ... 010	10pF ... 100	220pF ... 221
1.5pF ... 015	47pF ... 470	560pF ... 561

C\*\*\* : CERAMIC CAP.

4) DK16 × × × 300,

High dielectric constant ceramic capacitor  
 Disc type  
 Temp.chara. 2B4, 50V  
 Capacity value

Examples ;

④ Capacity value

100pF ... 101	1000pF ... 102	10000pF ... 103
470pF ... 471	2200pF ... 222	

C\*\*\* : 5) ELECTROLY CAP. (  $\frac{\square}{\square}$  ), 6) FILM CAP. (  $\frac{\square}{\square}$  )

5) EA × × × × × 10, Electrolytic capacitor  
 One-way lead type, Tolerance ±20%

⑤ Working voltage  
 Capacity value

Examples ;

⑤ Capacity value

0.1μF ... 104	4.7μF ... 475	100μF ... 107
0.33μF ... 334	10μF ... 106	330μF ... 337
1μF ... 105	22μF ... 226	1100μF ... 118
		2200μF ... 228

⑥ Working voltage

6.3V ... 006	25V ... 025
10V ... 010	35V ... 035
16V ... 016	50V ... 050

6) DF15 × × × 350 → Plastic film capacitor

DF15 × × × 310 → One-way type, Mylar ±5% 50V

DF16 × × × 310 → Plastic film capacitor

One-way type, Mylar ±10% 50V

⑦ Capacity value

Examples ;

⑦ Capacity value

0.001μF (1000pF) ... 102	0.1μF ... 104
0.0018μF ... 182	0.56μF ... 564
0.01μF ... 103	1μF ... 105
0.015μF ... 153	

NOTE : 1) The above CODES (R\*\*\*, R\*\*\*, C\*\*\*, C\*\*\* and C\*\*\*) are omitted on the schematic diagram in some case.

2) On the occasion, be confirmed the common parts on the parts list.

3) Refer to "Common Parts List" for the other common parts (R105, DD4, DK4).

### NOTE ON SAFETY FOR FUSIBLE RESISTOR :

The suppliers and their type numbers of fusible resistors are as follows;

1. KOA Corporation

Part No. (MJI)	Type No. (KOA)	Description
NH05 × × × 140	RF25S × × × × ΩJ	(±5% 1/4W)
NH05 × × × 120	RF50S × × × × ΩJ	(±5% 1/2W)
NH85 × × × 110	RF73B2A × × × × ΩJ	(±5% 1/10W)
NH95 × × × 140	RF73B2E × × × × ΩJ	(±5% 1/4W)

\* Resistance value      Resistance value  
 (0.1 - 10kΩ)

2. Matsushita Electronic Components Co., Ltd

Part No. (MJI)	Type No. (MEC)	Description
NF05 × × × 140	ERD-2FCJ × × ×	(±5% 1/4W)
RF05 × × × 140		
NF02 × × × 140	ERD-2FCG × × ×	(±2% 1/4W)
RF02 × × × 140		

\* Resistance value      \* Resistance value

Examples ;



\* Resistance value

0.1Ω ... 001	10Ω ... 100	1kΩ ... 102	100kΩ ... 104
0.5Ω ... 005	18Ω ... 180	2.7kΩ ... 272	680kΩ ... 684
1Ω ... 010	100Ω ... 101	10kΩ ... 103	1MΩ ... 105
6.8Ω ... 068	390Ω ... 391	22kΩ ... 223	4.7MΩ ... 475


### ABBREVIATION AND MARKS

ANT. : ANTENNA	BATT. : BATTERY
CAP. : CAPACITOR	CER. : CERAMIC
CONN. : CONNECTING	DIG. : DIGITAL
HP : HEADPHONE	MIC. : MICROPHONE
μ-PRO : MICROPROCESSOR	REC. : RECORDING
RES. : RESISTOR	SPK : SPEAKER
SW : SWITCH	TRANSF. : TRANSFORMER
TRIM. : TRIMMING	TRS. : TRANSISTOR
VAR. : VARIABLE	X'TAL : CRYSTAL

### NOTE ON SAFETY :

Symbol  Fire or electrical shock hazard. Only original parts should be used to replaced any part marked with symbol . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

### 安全上の注意 :

 がついている部品は、安全上重要な部品です。必ず指定されている部品番号の部品を使用して下さい。

(VERS.:VERSION, U:U.S.A., F:JAPAN, K:FAR EAST, --:EUROPE)

POS. NO.	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO.	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJI)
<b>FUNCTION CIRCUIT BOARD</b>					<b>SEMICONDUCTORS</b>				
<b>CAPACITORS</b>					<b>MISCELLANEOUS</b>				
▲ 2551		4822 126 12147	CER. 22nF ±10% Y5R 25V	QP12612147	▲ 3575		4822 052 10479	47Ω ±5% 0.33W	QP05210479
▲ 2552		4822 126 12147	CER. 22nF ±10% Y5R 25V	QP12612147	▲ 3576		4822 052 10479	47Ω ±5% 0.33W	QP05210479
2553		4822 122 33519	CER. 470pF ±10% 50V	QP12233519	3601				
2554		4822 122 33519	CER. 470pF ±10% 50V	QP12233519	∫		4822 116 52235	1MΩ ±5% 0.5W	QP11652235
▲ 2555	/02	4822 122 33169	CER. 680pF ±10% 50V	QP12233169	3618		4822 116 52235	1MΩ ±5% 0.5W	QP11652235
2555	F,U	4822 122 33849	CER. 150pF ±10% Y5P 50V	QP12233849	3633		4822 116 83864	10kΩ ±5% 0.5W	QP11683864
▲ 2556	/02	4822 122 33169	CER. 680pF ±10% 50V	QP12233169	3634		4822 116 83864	10kΩ ±5% 0.5W	QP11683864
2556	F,U	4822 122 33849	CER. 150pF ±10% Y5P 50V	QP12233849	3635		4822 116 83864	10kΩ ±5% 0.5W	QP11683864
2559		4822 124 12023	ELECT 47μF ±20% 25V	QP12412023	3637		4822 116 83864	10kΩ ±5% 0.5W	QP11683864
2560		4822 124 12023	ELECT 47μF ±20% 25V	QP12412023					
2561		4822 121 70654	FILM 2.2nF ±10% 50V	QP12170654	▲ 6605		4822 130 30621	DIODE 1N4148	QP13030621
2562		4822 121 70654	FILM 2.2nF ±10% 50V	QP12170654	▲ 6608		4822 130 30621	DIODE 1N4148	QP13030621
2563		4822 121 51399	FILM 47nF ±10% 50V	QP12151399	7551		4822 130 63122	TRS. 2SK369BL	QP13063122
2564		4822 121 51399	FILM 47nF ±10% 50V	QP12151399	7552		4822 130 63122	TRS. 2SK369BL	QP13063122
2565		4822 121 10685	FILM 1.8nF ±10% 50V	QP12110685	7553		4822 130 63122	TRS. 2SK369BL	QP13063122
2566		4822 121 10685	FILM 1.8nF ±10% 50V	QP12110685	7554		4822 130 63122	TRS. 2SK369BL	QP13063122
2567		4822 121 41935	FILM 12nF ±5% 250V	QP12141935	7555		4822 209 31153	IC NJM2114D	QP20931153
2568		4822 121 41935	FILM 12nF ±5% 250V	QP12141935	7601		4822 130 44568	TRS. BC557B	QP13044568
2569		4822 124 12024	ELECT 10μF ±20% 16V	QP12412024	7602		4822 130 40959	TRS. BC547B	QP13040959
2570		4822 124 12024	ELECT 10μF ±20% 16V	QP12412024					
2571		4822 121 10696	FILM 4.7nF ±2% 50V	QP12110696	1551		4822 265 10311	TERMINAL 2P RCA JACK	QP26510311
2572		4822 121 10696	FILM 4.7nF ±2% 50V	QP12110696	1601		4822 265 10311	TERMINAL 2P RCA JACK	QP26510311
2573		4822 124 12022	ELECT 220μF ±20% 25V	QP12412022	1602	PM-68	4822 267 20453	TERMINAL 6P RCA JACK	QP26720453
2574		4822 124 12022	ELECT 220μF ±20% 25V	QP12412022	1602	PM-78	4822 265 11061	TERMINAL 6P RCA JACK	QP26511061
2575		4822 124 40248	ELECT 10μF ±20% 63V	QP12440248	1603	PM-68	4822 267 31452	TERMINAL 4P RCA JACK	QP26731452
▲ 2601					1603	PM-78	4822 265 30996	TERMINAL 4P RCA JACK	QP26530996
∫		4822 126 12147	CER. 22nF ±10% Y5R 25V	QP12612147	1604		4822 267 50915	CONNECTOR, 15P WIRE	QP26750915
▲ 2612					▲ 5551		4822 280 20501	RELAY MR62-24SR	QP28020501
2613					▲ 5601				
∫		4822 122 33849	CER. 150pF ±10% Y5P 50V	QP12233849	∫		4822 280 20501	RELAY MR62-24SR	QP28020501
2624					▲ 5612				
2647									
∫		4822 124 40248	ELECT 10μF ±20% 63V	QP12440248					
2656					▲ 2631				
2659		4822 124 80196	ELECT 47μF ±20% 50V	QP12480196	∫		4822 126 12147	CER. 22nF ±10% Y5R 25V	QP12612147
<b>RESISTORS</b>					▲ 2638				
3551		4822 116 83872	220Ω ±5% 0.5W	QP11683872	2639				
3552		4822 116 83872	220Ω ±5% 0.5W	QP11683872	∫		4822 122 33849	CER. 150pF ±10% Y5P 50V	QP12233849
3553		4822 116 83884	47kΩ ±5% 0.5W	QP11683884	2646				
3554		4822 116 83884	47kΩ ±5% 0.5W	QP11683884					
3555					<b>RESISTORS</b>				
∫		4822 116 52283	4.7kΩ ±5% 0.5W	QP11652283	3621				
3560					∫		4822 116 52235	1MΩ ±5% 0.5W	QP11652235
3561		4822 116 52206	120Ω ±5% 0.5W	QP11652206	3628				
3562		4822 116 52206	120Ω ±5% 0.5W	QP11652206	3629				
3563		4822 116 52175	100Ω ±5% 0.5W	QP11652175	∫		4822 116 83883	470Ω ±5% 0.5W	QP11683883
3564		4822 116 52175	100Ω ±5% 0.5W	QP11652175	3632				
3565		4822 116 52234	100kΩ ±5% 0.5W	QP11652234					
3566		4822 116 52234	100kΩ ±5% 0.5W	QP11652234	1611	PM-68	4822 267 31452	TERMINAL 4P RCA JACK	QP26731452
3567		4822 116 52289	5.6kΩ ±5% 0.5W	QP11652289	1611	PM-78	4822 265 30996	TERMINAL 4P RCA JACK	QP26530996
3568		4822 116 52289	5.6kΩ ±5% 0.5W	QP11652289	1612	PM-68	4822 267 31452	TERMINAL 4P RCA JACK	QP26731452
3569		4822 116 52175	100Ω ±5% 0.5W	QP11652175	1612	PM-78	4822 265 30996	TERMINAL 4P RCA JACK	QP26530996
3570		4822 116 52175	100Ω ±5% 0.5W	QP11652175					
3571		4822 116 52234	100kΩ ±5% 0.5W	QP11652234	<b>VOLUME CIRCUIT BOARD</b>				
3572		4822 116 52234	100kΩ ±5% 0.5W	QP11652234	<b>CAPACITORS</b>				
3573		4822 116 83872	220Ω ±5% 0.5W	QP11683872	▲ 2653		4822 122 33195	CER. 100pF ±10% 50V	QP12233195
3574		4822 116 83872	220Ω ±5% 0.5W	QP11683872	▲ 2654		4822 122 33195	CER. 100pF ±10% 50V	QP12233195



(VERS.:VERSION, U:U.S.A., F:JAPAN, K:FAR EAST, \*:EUROPE)

POS. NO.	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO.	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJI)
2657		4822 126 11948	CER. 22pF $\pm 5\%$ 50V	QP12611948	▲ 2407		4822 126 12882	CER. 100nF+80% -20% 50V	QP12612882
2658		4822 126 11948	CER. 22pF $\pm 5\%$ 50V	QP12611948	2408		4822 124 81151	ELECT 22 $\mu$ F 50V	QP12481151
▲ 2659		4822 126 12339	CER. 2.2nF $\pm 10\%$ Y5R	QP12612339	2409		4822 124 81151	ELECT 22 $\mu$ F 50V	QP12481151
▲ 2660		4822 126 12339	CER. 2.2nF $\pm 10\%$ Y5R	QP12612339	▲ 2410		4822 121 51387	FILM 10nF $\pm 20\%$ 16V	QP12151387
2661		4822 124 12026	ELECT 22 $\mu$ F $\pm 20\%$ 25V	QP12412026	▲ 2411		4822 121 51387	FILM 10nF $\pm 20\%$ 16V	QP12151387
2662		4822 124 12026	ELECT 22 $\mu$ F $\pm 20\%$ 25V	QP12412026	2412		4822 124 81151	ELECT 22 $\mu$ F 50V	QP12481151
2663		4822 121 10686	FILM 4.7nF $\pm 10\%$ 50V	QP12110686	▲ 2413		4822 121 51387	FILM 10nF $\pm 20\%$ 16V	QP12151387
2664		4822 121 10686	FILM 4.7nF $\pm 10\%$ 50V	QP12110686	▲ 2414		4822 126 12882	CER. 100nF+80% -20% 50V	QP12612882
2665		4822 124 12022	ELECT 220 $\mu$ F $\pm 20\%$ 25V	QP12412022	2415		4822 124 81151	ELECT 22 $\mu$ F 50V	QP12481151
2666		4822 124 12022	ELECT 220 $\mu$ F $\pm 20\%$ 25V	QP12412022	▲ 2416		4822 121 51387	FILM 10nF $\pm 20\%$ 16V	QP12151387
▲ 2667		4822 124 40246	ELECT 4.7 $\mu$ F $\pm 20\%$ 63V	QP12440246	▲ 2417		4822 121 51387	FILM 10nF $\pm 20\%$ 16V	QP12151387
▲ 2668		4822 124 40246	ELECT 4.7 $\mu$ F $\pm 20\%$ 63V	QP12440246	▲ 2425				
2669		4822 124 12027	ELECT 2.2 $\mu$ F $\pm 20\%$ 50V	QP12412027	f		4822 126 12882	CER. 100nF+80% -20% 50V	QP12612882
2670		4822 124 12027	ELECT 2.2 $\mu$ F $\pm 20\%$ 50V	QP12412027	▲ 2428				
2671		4822 124 80141	ELECT 10nF $\pm 10\%$ 50V	QP12480141					
			<b>RESISTORS</b>		▲ 3401		4822 052 10101	100 $\Omega$ $\pm 5\%$ 0.33W	QP05210101
3651	PM-68	4822 116 83874	220k $\Omega$ $\pm 5\%$ 0.5W	QP11683874	3402		4822 116 52234	100k $\Omega$ $\pm 5\%$ 0.5W	QP11652234
3651	PM-78	4822 116 52244	15k $\Omega$ $\pm 5\%$ 0.5W	QP11652244	3403				
3652	PM-68	4822 116 83874	220k $\Omega$ $\pm 5\%$ 0.5W	QP11683874	f		4822 116 83864	10k $\Omega$ $\pm 5\%$ 0.5W	QP11683864
3652	PM-78	4822 116 52244	15k $\Omega$ $\pm 5\%$ 0.5W	QP11652244	3407				
3653		4822 050 11002	1k $\Omega$ $\pm 1\%$ 0.4W	QP05011002	3408		4822 116 83864	10k $\Omega$ $\pm 5\%$ 0.5W	QP11683864
3654		4822 050 11002	1k $\Omega$ $\pm 1\%$ 0.4W	QP05011002	3416				
3655	PM-68	4822 116 52206	120 $\Omega$ $\pm 5\%$ 0.5W	QP11652206	f		4822 116 52222	390 $\Omega$ $\pm 5\%$ 0.5W	QP11652222
3655	PM-78	4822 116 83876	270 $\Omega$ $\pm 5\%$ 0.5W	QP11683876	3422				
3656	PM-68	4822 116 52206	120 $\Omega$ $\pm 5\%$ 0.5W	QP11652206	3423				
3656	PM-78	4822 116 83876	270 $\Omega$ $\pm 5\%$ 0.5W	QP11683876	f		4822 116 52234	100k $\Omega$ $\pm 5\%$ 0.5W	QP11652234
					3426				
3657					3427				
f		4822 116 52283	4.7k $\Omega$ $\pm 5\%$ 0.5W	QP11652283	f		4822 116 83864	10k $\Omega$ $\pm 5\%$ 0.5W	QP11683864
3662					3436				
3663		4822 116 83872	220 $\Omega$ $\pm 5\%$ 0.5W	QP11683872	3437		4822 116 52234	100k $\Omega$ $\pm 5\%$ 0.5W	QP11652234
3664		4822 116 83872	220 $\Omega$ $\pm 5\%$ 0.5W	QP11683872	3438		4822 116 52234	100k $\Omega$ $\pm 5\%$ 0.5W	QP11652234
3665		4822 116 52235	1M $\Omega$ $\pm 5\%$ 0.5W	QP11652235	3439		4822 116 52234	100k $\Omega$ $\pm 5\%$ 0.5W	QP11652234
3666		4822 116 52235	1M $\Omega$ $\pm 5\%$ 0.5W	QP11652235	3440		4822 116 83872	220 $\Omega$ $\pm 5\%$ 0.5W	QP11683872
3667	PM-68	4822 050 11002	1k $\Omega$ $\pm 1\%$ 0.4W	QP05011002					
3667	PM-78	4822 116 52256	2.2k $\Omega$ $\pm 5\%$ 0.5W	QP11652256	3441		4822 116 52234	100k $\Omega$ $\pm 5\%$ 0.5W	QP11652234
3668	PM-68	4822 050 11002	1k $\Omega$ $\pm 1\%$ 0.4W	QP05011002	3442		4822 116 52271	33k $\Omega$ $\pm 5\%$ 0.5W	QP11652271
					3443		4822 116 52257	22k $\Omega$ $\pm 5\%$ 0.5W	QP11652257
3668	PM-78	4822 116 52256	2.2k $\Omega$ $\pm 5\%$ 0.5W	QP11652256	3444		4822 116 52283	4.7k $\Omega$ $\pm 5\%$ 0.5W	QP11652283
3669		4822 116 52175	100 $\Omega$ $\pm 5\%$ 0.5W	QP11652175	3445		4822 116 52256	2.2k $\Omega$ $\pm 5\%$ 0.5W	QP11652256
3670		4822 116 52175	100 $\Omega$ $\pm 5\%$ 0.5W	QP11652175	3446		4822 116 52257	22k $\Omega$ $\pm 5\%$ 0.5W	QP11652257
3671		4822 116 52234	100k $\Omega$ $\pm 5\%$ 0.5W	QP11652234	3447		4822 116 52175	100 $\Omega$ $\pm 5\%$ 0.5W	QP11652175
3672		4822 116 52234	100k $\Omega$ $\pm 5\%$ 0.5W	QP11652234	3448				
3673		4822 116 83872	220 $\Omega$ $\pm 5\%$ 0.5W	QP11683872	f		4822 116 83864	10k $\Omega$ $\pm 5\%$ 0.5W	QP11683864
3674		4822 116 83872	220 $\Omega$ $\pm 5\%$ 0.5W	QP11683872	3451				
▲ 3675		4822 052 10479	47 $\Omega$ $\pm 5\%$ 0.33W	QP05210479	▲ 3452		4822 052 10101	100 $\Omega$ $\pm 5\%$ 0.33W	QP05210101
▲ 3676		4822 052 10479	47 $\Omega$ $\pm 5\%$ 0.33W	QP05210479	3453				
3681	PM-68	4822 101 11789	VARIABLE 50k $\Omega$	QP10111789	f		4822 116 83864	10k $\Omega$ $\pm 5\%$ 0.5W	QP11683864
3681	PM-78	4822 101 11803	VARIABLE 50k $\Omega$	QP10111803	3459				
			<b>SEMICONDUCTORS</b>		3460		4822 116 52257	22k $\Omega$ $\pm 5\%$ 0.5W	QP11652257
7651					3461		4822 116 83864	10k $\Omega$ $\pm 5\%$ 0.5W	QP11683864
f		4822 130 63122	TRS. 2SK369BL	QP13063122	3462		4822 116 83884	47k $\Omega$ $\pm 5\%$ 0.5W	QP11683884
7654					3463		4822 116 83864	10k $\Omega$ $\pm 5\%$ 0.5W	QP11683864
7655		4822 209 31153	IC NJM2114D	QP20931153	3464		4822 116 83864	10k $\Omega$ $\pm 5\%$ 0.5W	QP11683864
			<b>FRONT CIRCUIT BOARD</b>		3465		4822 116 52257	22k $\Omega$ $\pm 5\%$ 0.5W	QP11652257
			<b>CAPACITORS</b>		3466		4822 116 52195	47 $\Omega$ $\pm 5\%$ 0.5W	QP11652195
▲ 2401		4822 121 51387	FILM 10nF $\pm 20\%$ 16V	QP12151387	▲ 3467		4822 052 10101	100 $\Omega$ $\pm 5\%$ 0.33W	QP05210101
▲ 2403		4822 121 51387	FILM 10nF $\pm 20\%$ 16V	QP12151387	3468				
2404		4822 124 81151	ELECT 22 $\mu$ F 50V	QP12481151	f		4822 116 83864	10k $\Omega$ $\pm 5\%$ 0.5W	QP11683864
2405		4822 124 81151	ELECT 22 $\mu$ F 50V	QP12481151	3488				
2406		4822 124 80818	ELECT 22000 $\mu$ F 5.5V	QP12480818	3489		4822 116 83884	47k $\Omega$ $\pm 5\%$ 0.5W	QP11683884
					3490		4822 116 83864	10k $\Omega$ $\pm 5\%$ 0.5W	QP11683864
					3491		4822 116 83884	47k $\Omega$ $\pm 5\%$ 0.5W	QP11683884

(VERS.:VERSION, U:U.S.A., F:JAPAN, K:FAR EAST, \*:EUROPE)

POS. NO.	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJJ)	POS. NO.	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJJ)
3492	PM-78	4822 116 83864	10kΩ ±5% 0.5W	QP11683864	1403		4822 273 10336	ROTARY SWITCH REC.	QP27310336
3493		4822 116 83884	47kΩ ±5% 0.5W	QP11683884	1407		4822 267 51322	CONNECTOR 15P WIRE	QP26751322
3494		4822 116 83864	10kΩ ±5% 0.5W	QP11683864	5400		4822 242 72527	CER.RESONATOR 4.00MHz	QP24272527
3495		4822 116 83872	220Ω ±5% 0.5W	QP11683872	5401		4822 156 21721	COIL 2.2μH ±10%	QP15621721
3496		4822 116 52256	2.2kΩ ±5% 0.5W	QP11652256					
▲ 3541		4822 053 10332	3.3kΩ ±5% 1W	QP05310332				ENCODER CIRCUIT BOARD	
3542		4822 116 83864	10kΩ ±5% 0.5W	QP11683864					
3543		4822 116 52222	390Ω ±5% 0.5W	QP11652222				RESISTORS	
3544		4822 116 83864	10kΩ ±5% 0.5W	QP11683864	3497		4822 116 52175	100Ω ±5% 0.5W	QP11652175
3545		4822 116 52222	390Ω ±5% 0.5W	QP11652222	3498		4822 116 52175	100Ω ±5% 0.5W	QP11652175
3546	PM-78	4822 116 83864	10kΩ ±5% 0.5W	QP11683864				MISCELLANEOUS	
3547		4822 116 83864	10kΩ ±5% 0.5W	QP11683864	1404		4822 273 10237	ROTARY SWITCH SOURCE	QP27310237
▲ 6401			SEMICONDUCTORS						
∫		4822 130 30621	DIODE 1N4148	QP13030621				TONE CIRCUIT BOARD	
▲ 6404								CAPACITORS	
6405		4822 130 34174	DIODE BZX79-B4V7	QP13034174	2201		4822 124 80141	ELECT 10nF ±10% 50V	QP12480141
6406					2202		4822 124 80141	ELECT 10nF ±10% 50V	QP12480141
∫		4822 130 10792	LED LTL-1CHPE	QP13010792	2203		4822 124 12025	ELECT 470μF ±20% 35V	QP12412025
6413					2204		4822 124 41329	ELECT 2200μF ±20% 35V	QP12441329
6414		4822 130 10792	LED LTL-1CHPE	QP13010792	2205		4822 124 12022	ELECT 220μF ±20% 25V	QP12412022
6415	PM-78	4822 130 10792	LED LTL-1CHPE	QP13010792	2206		4822 124 12022	ELECT 220μF ±20% 25V	QP12412022
6416		4822 130 10792	LED LTL-1CHPE	QP13010792	2207		4822 124 12025	ELECT 470μF ±20% 35V	QP12412025
▲ 6417		4822 130 30621	DIODE 1N4148	QP13030621	2208		4822 124 40257	ELECT 220μF ±20% 63V	QP12440257
▲ 6418		4822 130 30621	DIODE 1N4148	QP13030621	2209		4822 124 12025	ELECT 470μF ±20% 35V	QP12412025
7401		4822 209 15719	μ-PRO TMP47C200BN-G929	QP20915719	2210		4822 124 12025	ELECT 470μF ±20% 35V	QP12412025
7402		4822 209 30193	IC LB1641	QP20930193	▲ 2211		4822 126 12147	CER. 22nF ±10% Y5R 25V	QP12612147
7403		4822 130 10165	IR-EYE GP1U28XP	QP13010165	2501		4822 124 81151	ELECT 22μF 50V	QP12481151
7404		4822 130 40959	TRS. BC547B	QP13040959	2502		4822 124 81151	ELECT 22μF 50V	QP12481151
7405		4822 130 40959	TRS. BC547B	QP13040959	2503		4822 122 33849	CER. 150pF ±10% Y5P 50V	QP12233849
7406		4822 130 40959	TRS. BC547B	QP13040959	2504		4822 122 33849	CER. 150pF ±10% Y5P 50V	QP12233849
7407	PM-78	4822 130 44568	TRS. BC557B	QP13044568	2505		4822 124 12022	ELECT 220μF ±20% 25V	QP12412022
7408		4822 130 40959	TRS. BC547B	QP13040959	2506		4822 124 12022	ELECT 220μF ±20% 25V	QP12412022
7409					2507		4822 121 41857	FILM 10nF ±5% 250V	QP12141857
∫		4822 130 44568	TRS. BC557B	QP13044568	2508		4822 121 41857	FILM 10nF ±5% 250V	QP12141857
7412					2509		4822 126 10777	CER. 100pF 50V	QP12610777
7413		4822 130 40959	TRS. BC547B	QP13040959	2510		4822 126 10777	CER. 100pF 50V	QP12610777
7414		4822 130 40959	TRS. BC547B	QP13040959	▲ 2511		4822 124 40246	ELECT 4.7μF ±20% 63V	QP12440246
7415		4822 130 44568	TRS. BC557B	QP13044568	▲ 2512		4822 124 40246	ELECT 4.7μF ±20% 63V	QP12440246
7416		4822 130 40959	TRS. BC547B	QP13040959	2513		4822 121 51399	FILM 47nF ±10% 50V	QP12151399
7417		4822 130 44568	TRS. BC557B	QP13044568	2514		4822 121 51399	FILM 47nF ±10% 50V	QP12151399
7418	PM-78	4822 130 40959	TRS. BC547B	QP13040959	2515		4822 124 12022	ELECT 220μF ±20% 25V	QP12412022
7419		4822 130 44568	TRS. BC557B	QP13044568	2516		4822 124 12022	ELECT 220μF ±20% 25V	QP12412022
7420		4822 130 40959	TRS. BC547B	QP13040959	2517		4822 124 40244	ELECT 2.2μF ±20% 63V	QP12440244
7421		4822 130 44568	TRS. BC557B	QP13044568	2518		4822 124 40244	ELECT 2.2μF ±20% 63V	QP12440244
7422		4822 130 40959	TRS. BC547B	QP13040959	2519		4822 121 10686	FILM 4.7nF ±10% 50V	QP12110686
7423		4822 130 44568	TRS. BC557B	QP13044568	2520		4822 121 10686	FILM 4.7nF ±10% 50V	QP12110686
7424		4822 130 40959	TRS. BC547B	QP13040959	▲ 2535		4822 122 33195	CER. 100pF ±10% 50V	QP12233195
7425		4822 130 44568	TRS. BC557B	QP13044568	▲ 2536		4822 122 33195	CER. 100pF ±10% 50V	QP12233195
7426		4822 130 40959	TRS. BC547B	QP13040959				RESISTORS	
7427		4822 130 44568	TRS. BC557B	QP13044568	▲ 3203		4822 052 10479	47Ω ±5% 0.33W	QP05210479
7428	PM-78				3501		4822 116 52235	1MΩ ±5% 0.5W	QP11652235
∫		4822 130 40959	TRS. BC547B	QP13040959	3502		4822 116 52235	1MΩ ±5% 0.5W	QP11652235
7431					3503		4822 116 52235	1MΩ ±5% 0.5W	QP11652235
7432		4822 130 44568	TRS. BC557B	QP13044568	3504		4822 116 52235	1MΩ ±5% 0.5W	QP11652235
7433		4822 130 44568	TRS. BC557B	QP13044568	3505		4822 116 83874	220kΩ ±5% 0.5W	QP11683874
7434		4822 130 40959	TRS. BC547B	QP13040959	3506		4822 116 83874	220kΩ ±5% 0.5W	QP11683874
			MISCELLANEOUS		3507		4822 116 83872	220Ω ±5% 0.5W	QP11683872
1401		4822 276 13114	PUSH SWITCH TACT	QP27613114	3508		4822 116 83872	220Ω ±5% 0.5W	QP11683872
1402		4822 276 13114	PUSH SWITCH TACT	QP27613114	3509		4822 116 52269	3.3kΩ ±5% 0.5W	QP11652269

(VERS.:VERSION, U:U.S.A., F:JAPAN, K:FAR EAST, \*\*:EUROPE)

POS. NO.	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO.	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJI)
3510		4822 116 52269	3.3kΩ ±5% 0.5W	QP11652269	2263	PM-78	4822 124 40257	ELECT 220μF ±20% 63V	QP12440257
3511		4822 101 11788	VARIABLE 10kΩ TONE	QP10111788	2264	PM-68	4822 124 22572	ELECT 100μF ±20% 63V	QP12422572
3512		4822 101 11788	VARIABLE 10kΩ TONE	QP10111788	2264	PM-78	4822 124 40257	ELECT 220μF ±20% 63V	QP12440257
▲ 3513		4822 052 10479	47Ω ±5% 0.33W	QP05210479	2265	PM-68	4822 124 22572	ELECT 100μF ±20% 63V	QP12422572
▲ 3514		4822 052 10479	47Ω ±5% 0.33W	QP05210479	2265	PM-78	4822 124 40257	ELECT 220μF ±20% 63V	QP12440257
3515		4822 116 52207	1.2kΩ ±5% 0.5W	QP11652207	2266	PM-68	4822 124 22572	ELECT 100μF ±20% 63V	QP12422572
3516		4822 116 52207	1.2kΩ ±5% 0.5W	QP11652207	2266	PM-78	4822 124 40257	ELECT 220μF ±20% 63V	QP12440257
3517		4822 116 52291	56kΩ ±5% 0.5W	QP11652291	2267		4822 124 12022	ELECT 220μF ±20% 25V	QP12412022
3518		4822 116 52291	56kΩ ±5% 0.5W	QP11652291	2268		4822 124 12022	ELECT 220μF ±20% 25V	QP12412022
3519		4822 116 52207	1.2kΩ ±5% 0.5W	QP11652207	2269				
3520		4822 116 52207	1.2kΩ ±5% 0.5W	QP11652207	∫		5322 121 42386	FILM 100nF ±5% 63V	QQ12142386
					2272				
3521		4822 116 52291	56kΩ ±5% 0.5W	QP11652291	2273				
3522		4822 116 52291	56kΩ ±5% 0.5W	QP11652291	∫		4822 124 80141	ELECT 10nF ±10% 50V	QP12480141
▲ 3523		4822 052 10479	47Ω ±5% 0.33W	QP05210479	2276				
▲ 3524		4822 052 10479	47Ω ±5% 0.33W	QP05210479	2283		4822 124 40242	ELECT 1μF ±20% 63V	QP12440242
3525		4822 116 83872	220Ω ±5% 0.5W	QP11683872					
3526		4822 116 83872	220Ω ±5% 0.5W	QP11683872					
3527		4822 116 83874	220kΩ ±5% 0.5W	QP11683874					
3528		4822 116 83874	220kΩ ±5% 0.5W	QP11683874					
3529		4822 101 30828	VARIABLE 100kΩ BALANCE	QP10130828					
3537		4822 116 52269	3.3kΩ ±5% 0.5W	QP11652269					
3538		4822 116 52269	3.3kΩ ±5% 0.5W	QP11652269					
3539		4822 116 52234	100kΩ ±5% 0.5W	QP11652234					
3540		4822 116 52234	100kΩ ±5% 0.5W	QP11652234					

(VERS: VERSION, U: U.S.A. F: JAPAN, K: FAR EAST, \*\* EUROPE)

POS. NO.	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO.	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJI)
▲ 3295	PM-78	4822 052 10109	10Ω ±5% 0.33W	QP05210109	6267				
▲ 3296	PM-68	4822 052 10479	47Ω ±5% 0.33W	QP05210479	┘		5322 130 34834	DIODE BZX79-C3V6	QQ13034834
▲ 3296	PM-78	4822 052 10109	10Ω ±5% 0.33W	QP05210109	6270				
▲ 3297	PM-68	4822 052 10479	47Ω ±5% 0.33W	QP05210479	▲ 6271		4822 130 30621	DIODE 1N4148	QP13030621
▲ 3297	PM-78	4822 052 10109	10Ω ±5% 0.33W	QP05210109	▲ 6272		4822 130 30621	DIODE 1N4148	QP13030621
▲ 3298	PM-68	4822 052 10479	47Ω ±5% 0.33W	QP05210479	6273				
▲ 3298	PM-78	4822 052 10109	10Ω ±5% 0.33W	QP05210109	┘		4822 130 30842	DIODE BAV21	QP13030842
3299		4822 101 11787	TRIMMING 100Ω ±30% 0.1W	QP10111787	6278				
3300		4822 101 11787	TRIMMING 100Ω ±30% 0.1W	QP10111787	▲ 6279		4822 130 30621	DIODE 1N4148	QP13030621
3301		4822 116 83876	270Ω ±5% 0.5W	QP11683876	▲ 6280		4822 130 30621	DIODE 1N4148	QP13030621
3302		4822 116 83876	270Ω ±5% 0.5W	QP11683876	▲ 6281		4822 130 30621	DIODE 1N4148	QP13030621
3303		4822 116 52207	1.2kΩ ±5% 0.5W	QP11652207	▲ 7251				
3304		4822 116 52207	1.2kΩ ±5% 0.5W	QP11652207	┘		4822 130 43233	TRS. 2SC2240GR	QP13043233
					▲ 7256				
3305		4822 116 80176	1Ω ±5% 0.5W	QP11680176	7257				
3306		4822 116 80176	1Ω ±5% 0.5W	QP11680176	┘		4822 130 42949	TRS. 2SA970GR	QP13042949
▲ 3309	PM-78	4822 100 20166	TRIMMING 10kΩ ±30% 0.1W	QP10020166	7260				
▲ 3310	PM-78	4822 100 20166	TRIMMING 10kΩ ±30% 0.1W	QP10020166					
3311	PM-78	4822 050 11002	1kΩ ±1% 0.4W	QP05011002	▲ 7261		4822 130 43233	TRS. 2SC2240GR	QP13043233
3312	PM-78	4822 050 11002	1kΩ ±1% 0.4W	QP05011002	▲ 7262		4822 130 43233	TRS. 2SC2240GR	QP13043233
▲ 3313					7263		4822 130 61009	TRS. 2SC3423 O	QP13061009
┘		4822 052 10101	100Ω ±5% 0.33W	QP05210101	7264		4822 130 61009	TRS. 2SC3423 O	QP13061009
▲ 3316					7265		5322 130 61728	TRS. 2SA1360-Y	QQ13061728
▲ 3317					7266		5322 130 61728	TRS. 2SA1360-Y	QQ13061728
┘		4822 052 10681	680Ω ±5% 0.33W	QP05210681	▲ 7267		4822 130 60117	TRS. 2SC3419	QP13060117
▲ 3320					▲ 7268		4822 130 60117	TRS. 2SC3419	QP13060117
▲ 3321					▲ 7269	PM-78	4822 130 90347	OPT. UNIT PC817	HW10006320
┘		4822 052 10479	47Ω ±5% 0.33W	QP05210479	▲ 7270	PM-78	4822 130 90347	OPT. UNIT PC817	HW10006320
▲ 3324		4822 052 10479	47Ω ±5% 0.33W	QP05210479	7271		4822 130 41646	TRS. BF423	QP13041646
▲ 3325		4822 052 10151	150Ω ±5% 0.33W	QP05210151	7272		4822 130 41646	TRS. BF423	QP13041646
▲ 3326		4822 052 10151	150Ω ±5% 0.33W	QP05210151	7273		4822 130 41782	TRS. BF422	QP13041782
▲ 3327					7274		4822 130 41782	TRS. BF422	QP13041782
┘		4822 052 10109	10Ω ±5% 0.33W	QP05210109					
▲ 3334					▲ 7275		4822 130 63634	TRS. 2SA1837Y	QP13063634
▲ 3335					▲ 7276		4822 130 63634	TRS. 2SA1837Y	QP13063634
┘		4822 117 12344	0.18Ω x2 ±10% 3W	QP11712344	▲ 7277		4822 130 10941	TRS. 2SC4793	QP13010941
▲ 3338					▲ 7278		4822 130 10941	TRS. 2SC4793	QP13010941
▲ 3339					▲ 7279	PM-68	4822 130 10942	TRS. 2SA1941	QP13010942
┘		4822 050 21002	1kΩ ±1% 0.6W	QP05021002	▲ 7279	PM-78	4822 130 10983	TRS. 2SA1962	QP13010983
▲ 3342					▲ 7280	PM-68	4822 130 10942	TRS. 2SA1941	QP13010942
3343		4822 116 52257	22kΩ ±5% 0.5W	QP11652257	▲ 7280	PM-78	4822 130 10983	TRS. 2SA1962	QP13010983
3344		4822 116 52257	22kΩ ±5% 0.5W	QP11652257	▲ 7281	PM-68	4822 130 10943	TRS. 2SC5198	QP13010943
					▲ 7281	PM-78	4822 130 10984	TRS. 2SC5242	QP13010984
3345		4822 116 52289	5.6kΩ ±5% 0.5W	QP11652289					
3346		4822 116 52257	22kΩ ±5% 0.5W	QP11652257	▲ 7282	PM-68	4822 130 10943	TRS. 2SC5198	QP13010943
3347	PM-68	4822 116 52297	68kΩ ±5% 0.5W	QP11652297	▲ 7282	PM-78	4822 130 10984	TRS. 2SC5242	QP13010984
3347	PM-78	4822 116 83882	39kΩ ±5% 0.5W	QP11683882	▲ 7283	PM-68	4822 130 10942	TRS. 2SA1941	QP13010942
3348		4822 116 52257	22kΩ ±5% 0.5W	QP11652257	▲ 7283	PM-78	4822 130 10983	TRS. 2SA1962	QP13010983
3349		4822 116 52297	68kΩ ±5% 0.5W	QP11652297	▲ 7284	PM-68	4822 130 10942	TRS. 2SA1941	QP13010942
3350		4822 116 52297	68kΩ ±5% 0.5W	QP11652297	▲ 7284	PM-78	4822 130 10983	TRS. 2SA1962	QP13010983
▲ 3351		4822 052 10221	220Ω ±5% 0.33W	QP05210221	▲ 7285	PM-68	4822 130 10943	TRS. 2SC5198	QP13010943
▲ 3352		4822 052 10221	220Ω ±5% 0.33W	QP05210221	▲ 7285	PM-78	4822 130 10984	TRS. 2SC5242	QP13010984
3353		4822 117 10814	10Ω ±5% 3W	QP11710814	▲ 7286	PM-68	4822 130 10943	TRS. 2SC5198	QP13010943
3354		4822 117 10814	10Ω ±5% 3W	QP11710814	▲ 7286	PM-78	4822 130 10984	TRS. 2SC5242	QP13010984
▲ 3355		4822 053 11331	330Ω ±5% 2W	QP05311331	▲ 7287		4822 130 43233	TRS. 2SC2240GR	QP13043233
▲ 3356		4822 053 11331	330Ω ±5% 2W	QP05311331	▲ 7288		4822 130 43233	TRS. 2SC2240GR	QP13043233
3369	PM-78	4822 050 11002	1kΩ ±1% 0.4W	QP05011002	7289		4822 130 42949	TRS. 2SA970GR	QP13042949
3370	PM-78	4822 050 11002	1kΩ ±1% 0.4W	QP05011002					
		</							



(VERS.:VERSION, U:U.S.A., F:JAPAN, K:FAR EAST, \*\*:EUROPE)

POS. NO.	VERS. COLOR	PART NO. (FOR PCS)	DESCRIPTION	PART NO. (MJI)
5351 5352		4822 157 70599 4822 157 70599	COIL SPK.OUTPUT COIL SPK.OUTPUT	QP15770599 QP15770599
▲ 2277 ▲ 2278 ▲ 2279 2281 ▲ 2282		4822 121 51387 4822 124 40433 4822 124 40433 4822 124 40242 4822 124 40433	<b>SPK PROTECT CIRCUIT BOARD CAPACITORS</b> FILM 10nF ±20% 16V ELECT 47µF ±20% 25V ELECT 47µF ±20% 25V ELECT 1µF ±20% 63V ELECT 47µF ±20% 25V	QP12151387 QP12440433 QP12440433 QP12440242 QP12440433
3357 ▲ 3358 3360 3361 3362 3364 3365		4822 116 83884 4822 053 10103 4822 116 83874 4822 116 52271 4822 116 52291 4822 053 10223 4822 116 52234	<b>RESISTORS</b> 47kΩ ±5% 0.5W 10kΩ ±5% 1W 220kΩ ±5% 0.5W 33kΩ ±5% 0.5W 56kΩ ±5% 0.5W 22kΩ ±5% 1W 100kΩ ±5% 0.5W	QP11683884 QP05310103 QP11683874 QP11652271 QP11652291 QP05310223 QP11652234
▲ 7290		4822 209 83312	<b>SEMICONDUCTOR</b> IC TA7317P	QP20983312
2533 2534		4822 124 80141 4822 124 80141	<b>SPK SW CIRCUIT BOARD</b>  <b>CAPACITORS</b> ELECT 10nF ±10% 50V ELECT 10nF ±10% 50V	QP12480141 QP12480141
3530 3531 3532 3533 3534 3535		4822 116 52256 4822 116 52256 4822 116 52257 4822 116 52176 4822 116 52176 4822 116 52234	<b>RESISTORS</b> 2.2kΩ ±5% 0.5W 2.2kΩ ±5% 0.5W 22kΩ ±5% 0.5W 10Ω ±5% 0.5W 10Ω ±5% 0.5W 100kΩ ±5% 0.5W	QP11652256 QP11652256 QP11652257 QP11652176 QP11652176 QP11652234
▲ 6529		4822 130 30621	<b>SEMICONDUCTORS</b> DIODE 1N4148	QP13030621
7529 7530		4822 130 44283 4822 130 44568	TRS. BC636 TRS. BC557B	QP13044283 QP13044568
1506 1507 1506 J 1508 1510 1510	PM-68 PM-68 PM-78 /02B,FB UBL /02G FN	4822 276 13883 4822 276 13883 4822 276 13894 4822 267 31453 4822 265 11062	<b>MISCELLANEOUS</b> PUSH SWITCH SPESKERS PUSH SWITCH SPESKERS PUSH SWITCH SPEAKERS JACK HEADPHONE JACK HEADPHONE	QP27613883 QP27613883 QP27613894 QP26731453 QP26511062
▲ 2201 ▲ 2202 2204 2205 2206 2207 2208		4822 126 13332 4822 126 13332 5322 121 42498 4822 124 12028 4822 124 12028 4822 124 42391 4822 124 42391	<b>PART NO. (FOR PCS)</b> <b>DESCRIPTION</b> <b>CAPACITORS</b> CER. 10nF ±20% 400V CER. 10nF ±20% 400V FILM 680nF ±5% 63V ELECT 12000µF ±20% 63V ELECT 12000µF ±20% 63V ELECT 470µF ±20% 63V ELECT 470µF ±20% 63V	QP12613332 QP12613332 QQ12142498 QP12412028 QP12412028 QP12442391 QP12442391